REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS 4147	Ø
1	KIT 217				

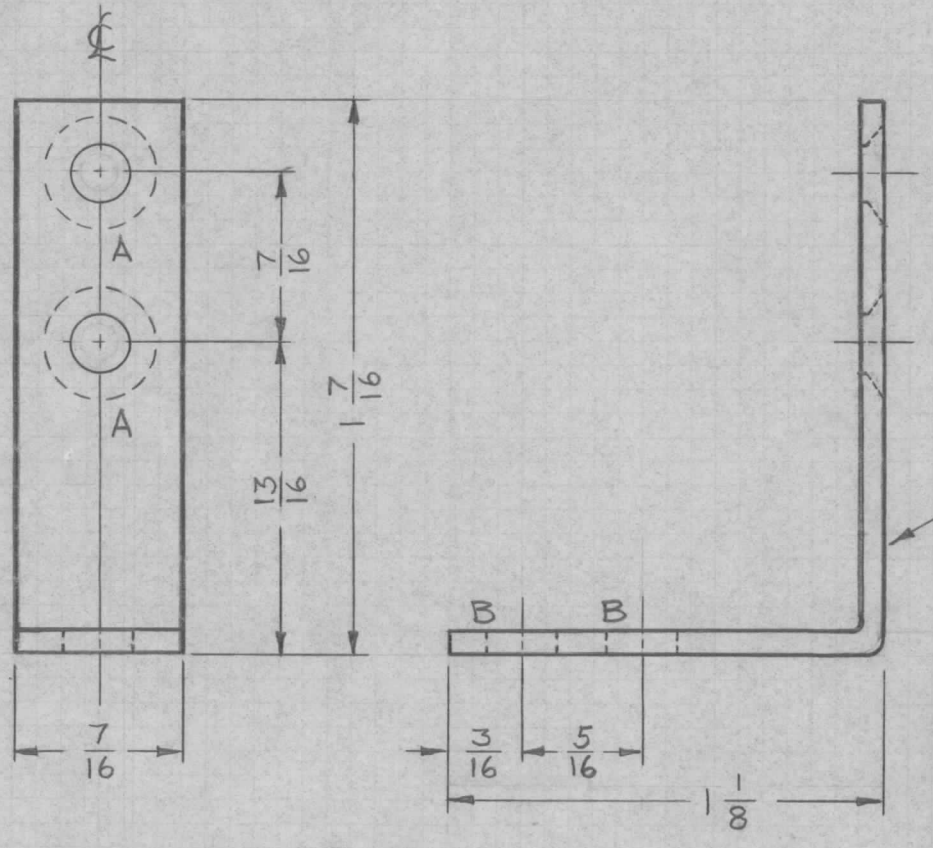

HOLE	DESCRIPTION	REQ
A	.144 DIA,-CSK 82° TO .284 DIA.	2
B	11/64 DIA.	2

METAL STAMP TMC PART NO. 3/32 HIGH GOTHIC WITH LATEST REVISION LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	12-1-64	Ø	@	@	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 2:1

TOLERANCES
DECIMALS .X ±.05, .XX ± .01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.064	O. POSE	

STOCK SIZE

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

ALUMINUM — MATERIAL

BRACKET, MOUNTING

5052-H32 — TYPE & TEMPER

— HEAT TREAT. SPEC.

J. Lullara — DRAWN

@ — CHECKED

RAE — FINAL APPROVAL

5404 YELLOW IRIDITE — FINISH & SPEC. NO.

ELEC. DES. APP.

MECH. DES. APP.

MS 4147 Ø