REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS4149	Ø
2	HFSR-1				

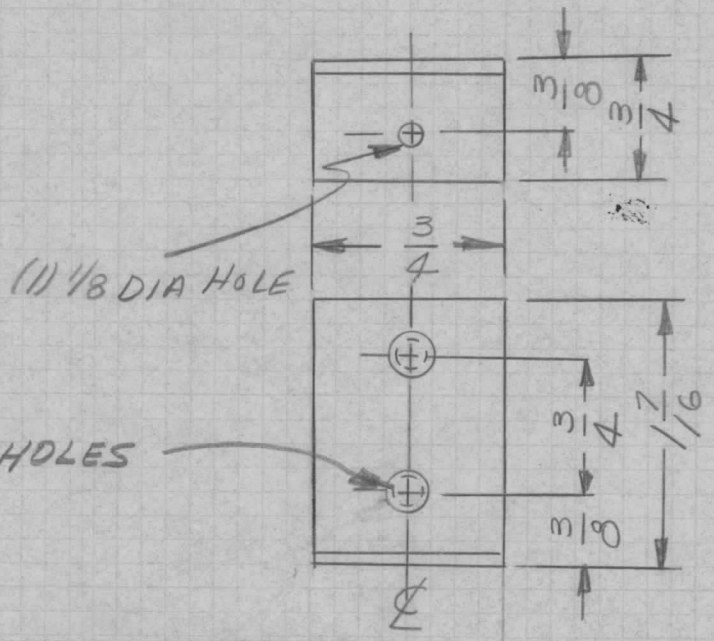

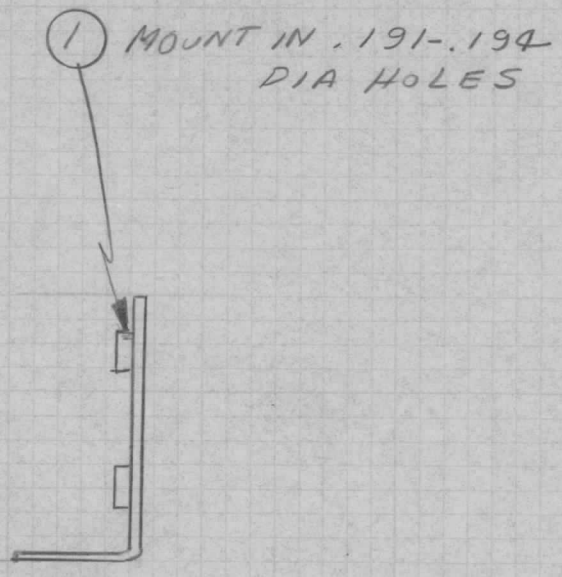

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

7-64

REQ.	ITEM	PART NO.	DESCRIPTION
2	1	WT-129-632-4	NUT, PLAIN, SPLINE

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	1-29-65	#	@		
X	EXP. RELEASE	11/23/64		JL		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

TOLERANCES
DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE

STOCK SIZE	.064 THK
MATERIAL	ALUMINUM
TYPE & TEMPER	5052-H32
HEAT TREAT. SPEC.	
FINISH & SPEC. NO.	YELLOW IRIDITE SPEC

SYMBOL: SK-3071-MS-5

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

BRACKET, MTG - LEDEX COVER

DRAWN	CHECKED	FINAL APPROVAL
JL	@	RJC
ELEC. DES. APP. FEC 2-17-65	MECH. DES. APP. BB	MS4149 Ø