


UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON			MS4155	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TER3500-50		11.23.64		

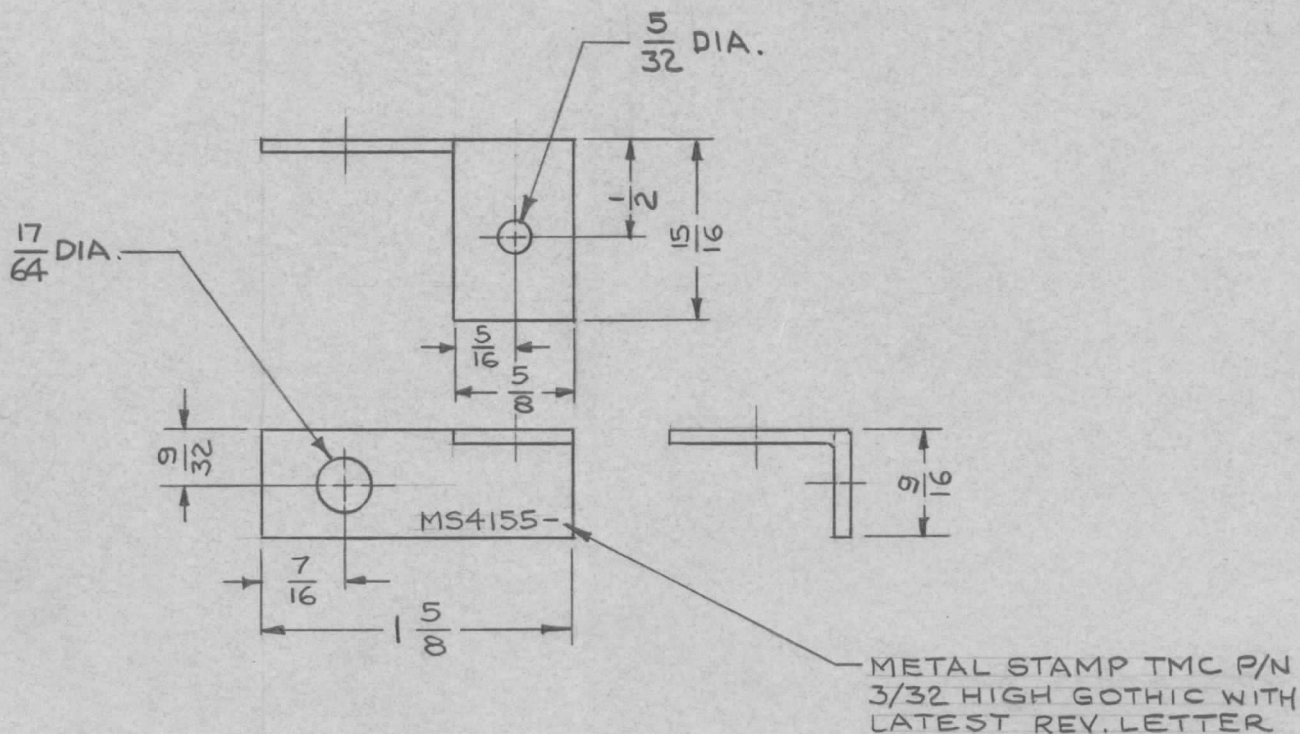

REQ. ITEM	PART NO.	BUDETTI	DESCRIPTION	SYMBOL						
	.051 THK		THE TECHNICAL MATERIEL CORP.							
	STOCK SIZE		MAMARONECK, NEW YORK							
Ø ORIGINAL RELEASE FOR PRODUCTION	1.14.65	Ø	J.F.							
X EXPER. RELEASE	1.13.65	X	KB							
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1		5052-H32		kb	@	RC
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A		TYPE & TEMPER S404 YELL. IRIDITE		DRAWN JB	CHECKED JP	FINAL APPROVAL MS4155 Ø
TOLERANCES						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	