HOLE	DESCRIPTION	REQ.
A	1/8 DIA.	4
B	.120 DIA. & C'SINK 82° TO .230 DIA.	2
C	5/16 DIA	1

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS4171	Ø
1	PFCB-1		12-24-64		

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

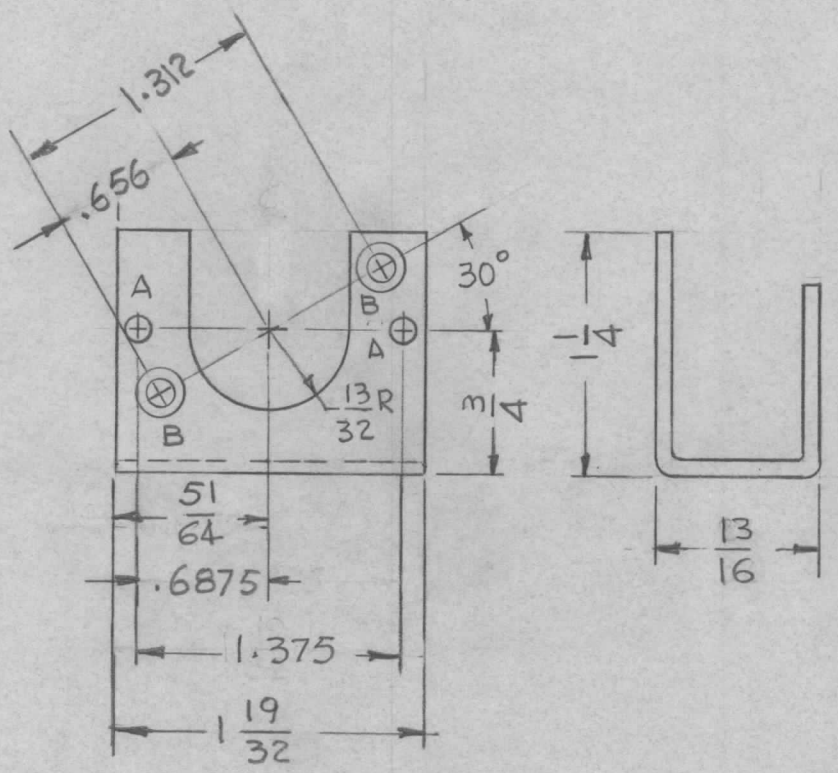

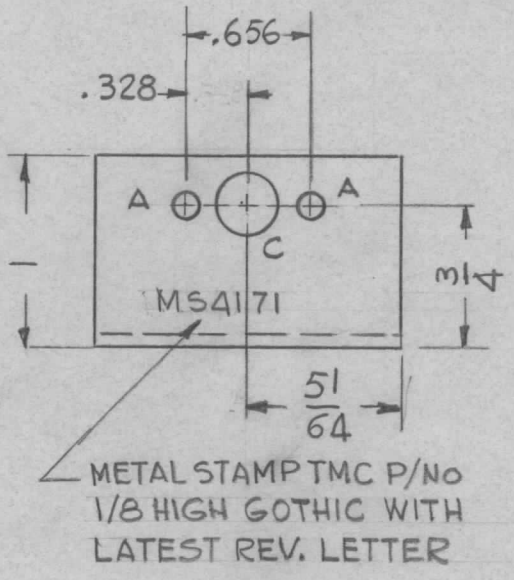

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	5.5.65	Ø	GL		
X	EXPER. RELEASE	12-24-64		C.D.L		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE 1:1

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		O-POSE		

.080 THK — STOCK SIZE

ALUMINUM — MATERIAL

5052-H32 — TYPE & TEMPER

S404 YEL. IRIDITE — FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

BRACKET, VERNIER
DOPPLER, CONNECTOR

DRAWN	CHECKED	FINAL APPROVAL
G.D.L 12-24-64		MS4171 Ø

ELEC. DES. APP. | MECH. DES. APP.

TMC FORM 108-A

REPROVEL NO. 440H 21540