



REQ. PER UNIT	USED ON			MS4181	Ø
	MODEL	ASS'Y. NO.	DATE		
1	APP-10		12-21-64		

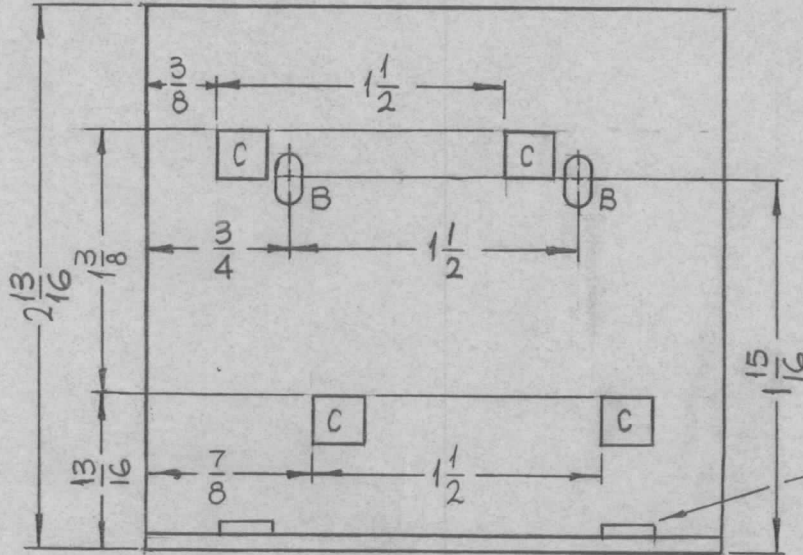

HOLES	DESCRIPTION	REQ.
A	.221-.224	2
B	1/8 X 1/4 SLOT	2
C	1/4 X 1/4 SQUARE	4

① MOUNT IN ALL 1/8" HOLES.

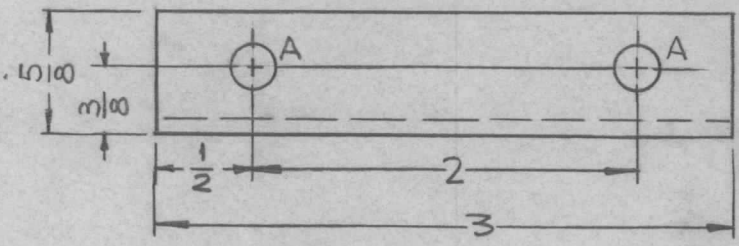

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

							2	1	NT 129-832-4	NUT, PLAIN, SPLINE	A	
							REQ. ITEM	PART NO.		F. BUDETTI DESCRIPTION	SYMBOL	
							3/32 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
							ALUMINUM		PLATE, MTG, CIRCUIT BREAKER			
							MATERIAL					
							5052-H32	SRG	<i>SRG</i>	<i>RDC</i>		
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
							S404 YELLOW IRIDITE		<i>[Signature]</i>			
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS4181	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE 1:1					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005							FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A			
TOLERANCES												
ORIGINAL RELEASE FOR PRODUCTION 1-4-65							Ø <i>SP</i>					
EXP. RELEASE 12-18-64							X SRG					
SYM	DESCRIPTION						DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	