


REQ. PER UNIT	USED ON			MS4215	A
	MODEL	ASS'Y. NO.	DATE		
1	GPT-10KLF		11-3-65		

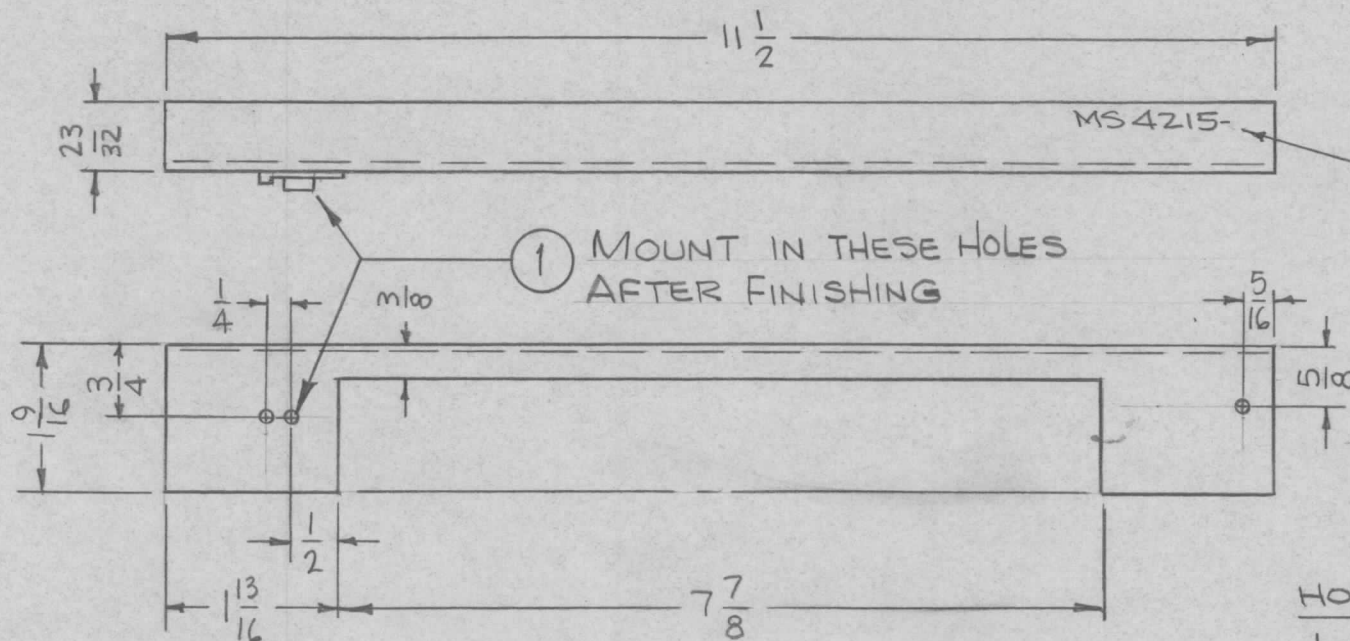

METAL STAMP TMC  
P/N 1/8 HIGH GOTHIC  
W/LATEST REV.  
LETTER.

HOLES:  
1/8 DIA. (3 REQ.)

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES

							1	1	FS117-4	FASTENER, SNAPSLIDE, SET			
							REQ. ITEM	PART NO.		F. BUDETTI	DESCRIPTION	SYMBOL	
							.081 THICK			THE TECHNICAL MATERIEL CORP.			
							STOCK SIZE			MAMARONECK. NEW YORK			
							ALUMINUM			COVER, CHASSIS, MTG. FAN			
							MATERIAL						
							5052-H32						
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
							S404 YEL. IRIDITE				MS4215 A		
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE 1/2:1						
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A							
A		ADDED ITEM 1		5.3.66	16207	HLA	QCB	file					
Ø		ORIGINAL RELEASE		12/21/65	Ø								