


METAL STAMP TMC P/NO 1/8 HIGH
GOTHIC W/LATEST REV. LETTER

MS4234

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO	DRAFT	CHKD	APPD
	ADDED 1/4" FLANGE & 9/16 RELIEF 8 7/16 WAS 9 7/16 REMOVED 3 15/16 DIM. & HOLE	11-19 64			CEJ	EPA KLL
X	EXPERIMENTAL RELEASE	12.29.64	X		KB	
X1	12 'B' HOLES ADDED - 'A' HOLES RELOCATED - DIM. 10 1/16 WAS 10"	3-9-65			G.D.L	
Ø	ORIGINAL RELEASE FOR PRODUCTION	3.31.65			Q.F.	

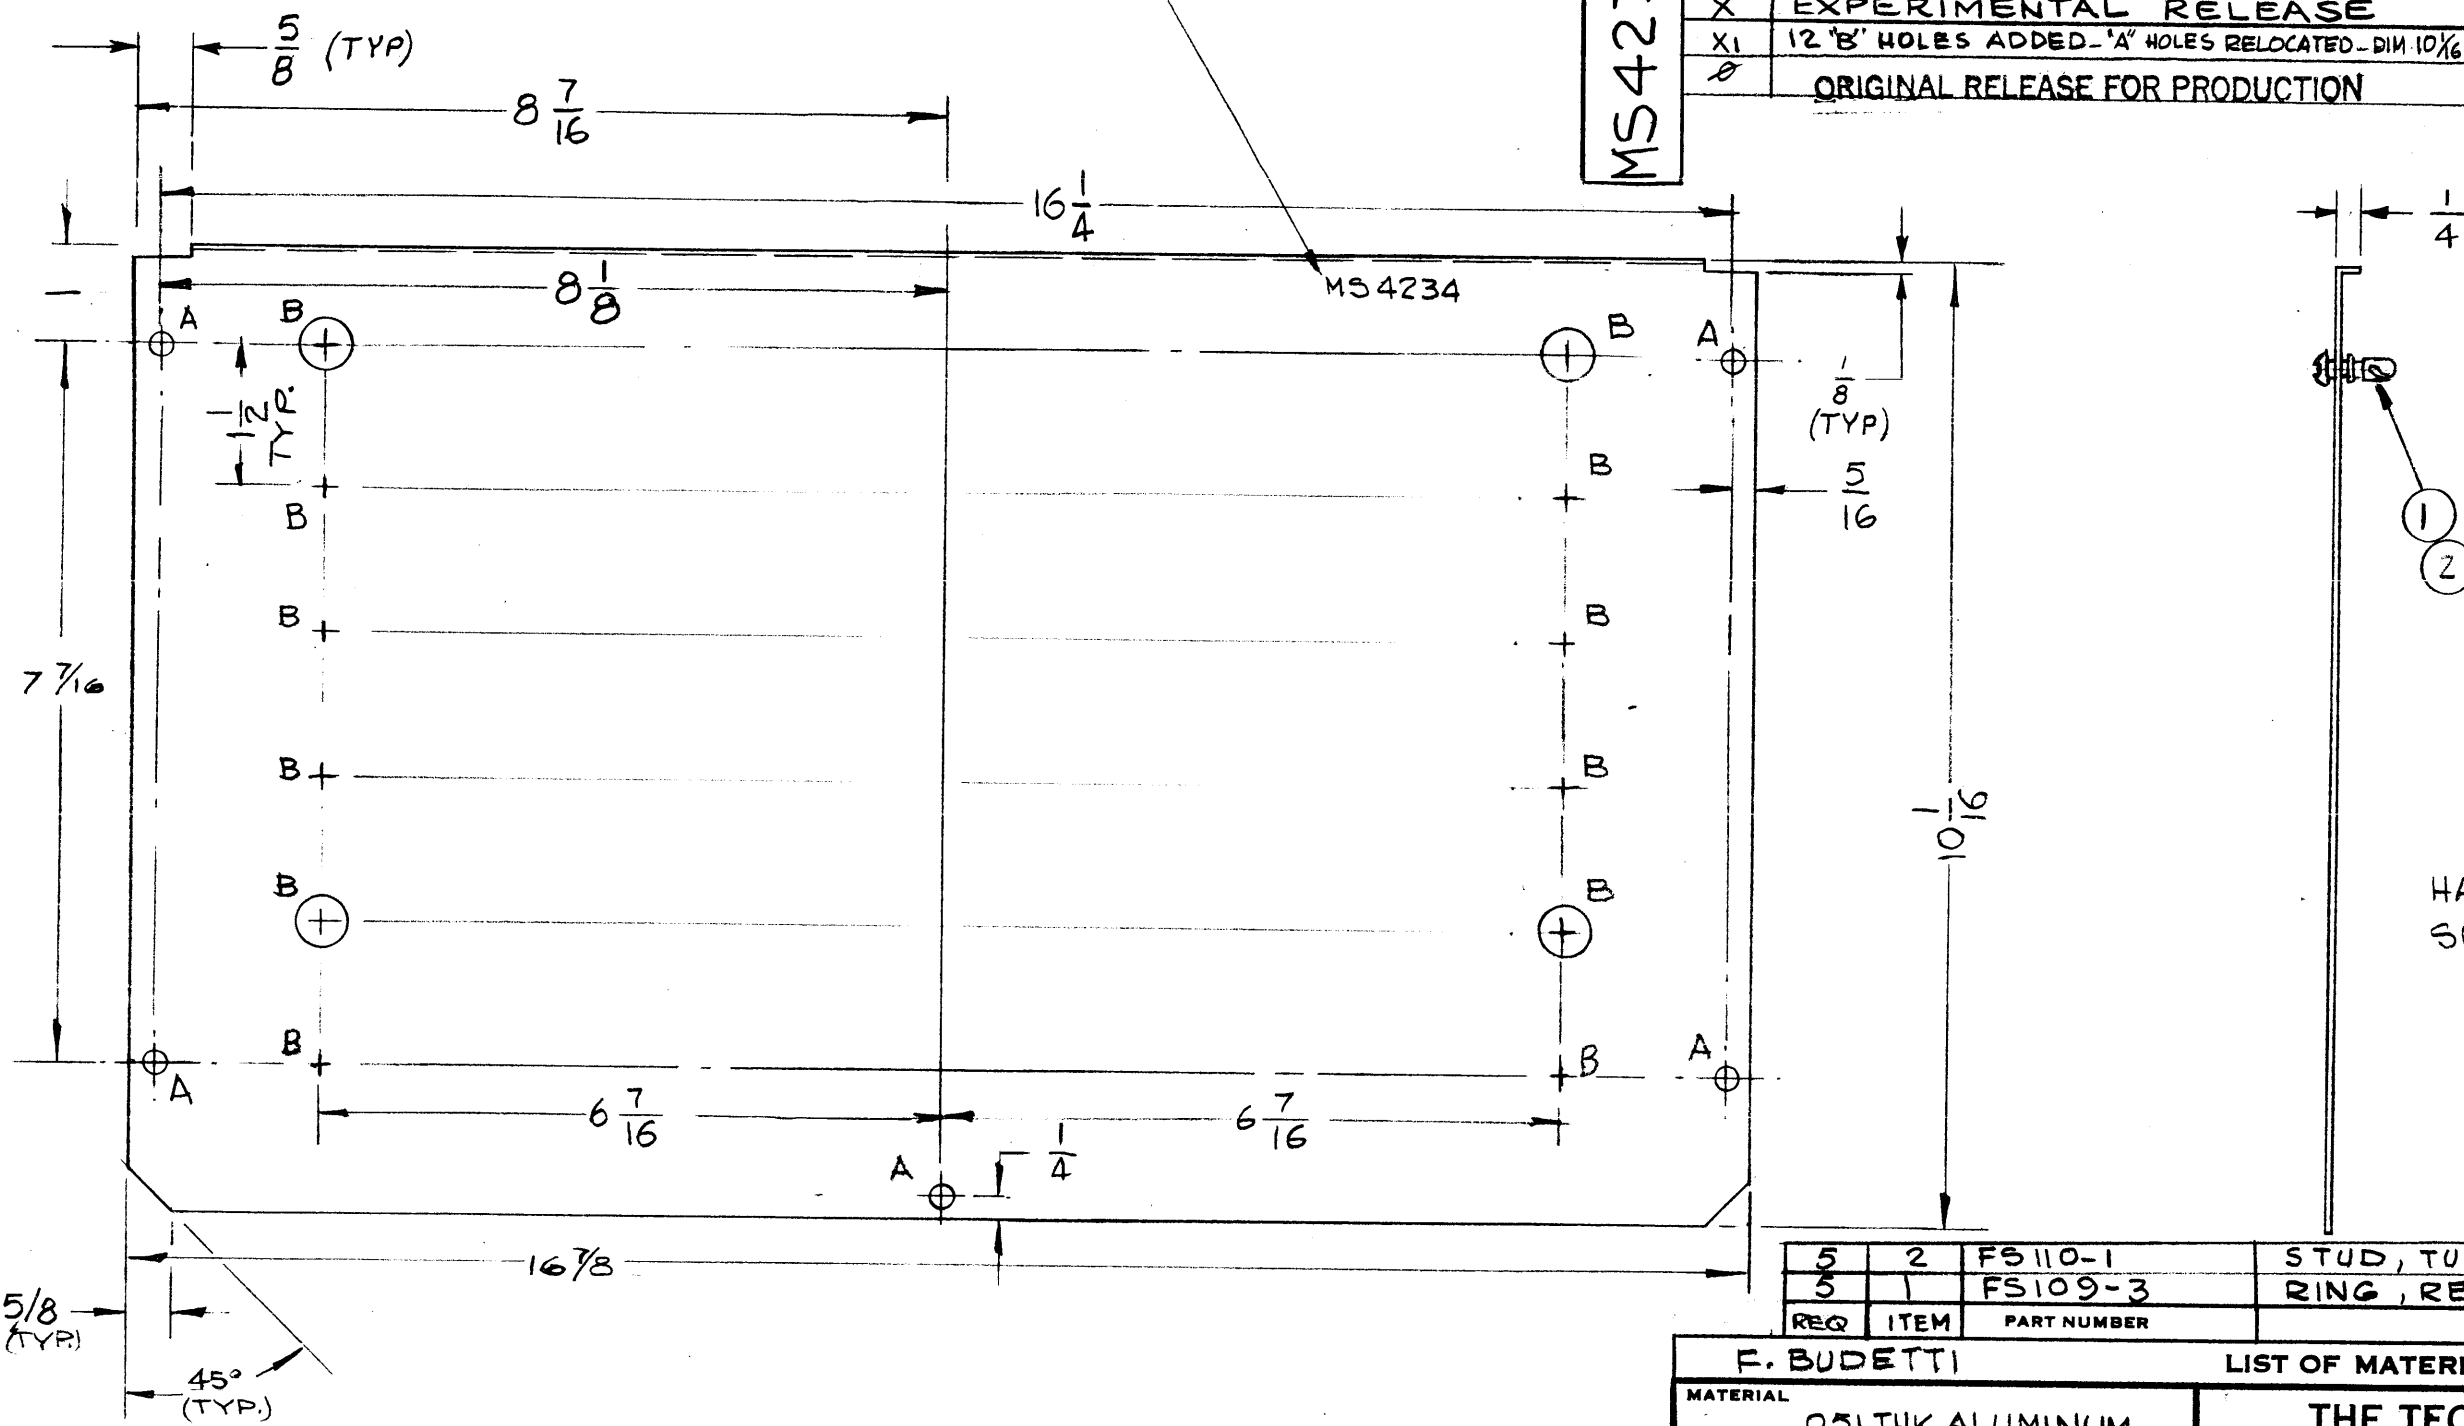

HOLE	DESCRIPTION	REQ
A	1/4 DR (.250 DIA)	5
B	1/2 DIA	12

1
2 (SEE NOTE)

NOTE:
HARDWARE TO BE MOUNTED &
SUPPLIED BY TMC

REQ	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
5	2	FS110-1	STUD, TURNLOCK	A
5	1	FS109-3	RING, RETAINING	A

F. BUDETTI LIST OF MATERIAL **5016-5-A**

MATERIAL	.051 THK ALUMINUM 5052 - H 32		
FINISH	S404 YEL. IBIDITE		
TITLE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
DRAWN E.D. JENSEN		DATE 3-3-65	FINAL APPROVAL [Signature]
CHECKED [Signature]		DATE 3-3-65	DATE 3-3-65
ELECT [Signature]		DATE 3-3-65	DATE 3-3-65
MECH [Signature]		DATE 3-3-65	DATE 3-3-65
TOLERANCES			REV. LTR.

- UNLESS OTHERWISE SPECIFIED:
- USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 - ALL ANGULAR BENDS 90 DEGREES
 - REMOVE ALL BURRS AND SHARP EDGES

NOTES

2	KMCU-1	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1/2 SIZE	CODE A	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		