


REQ. PER UNIT	USED ON			MS4242 Ø
	MODEL	ASS'Y. NO.	DATE	
2	TER-25K		12-29-64	

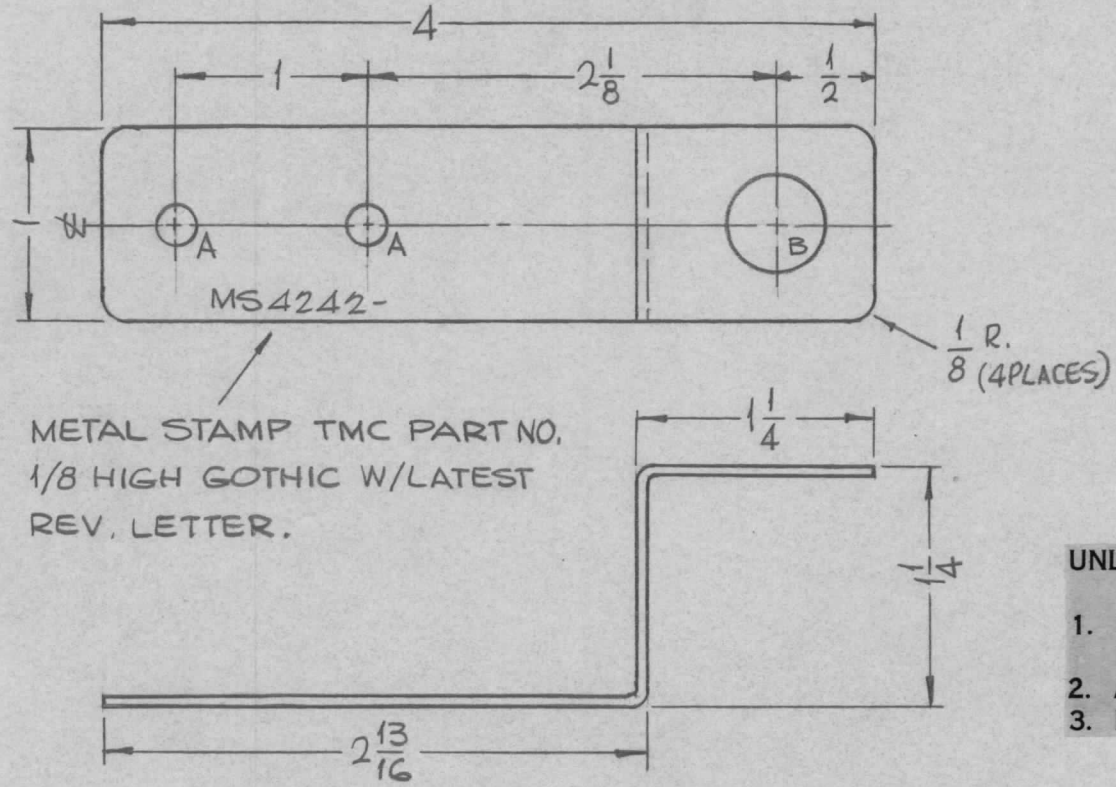

HOLES	DESCRIPTION	REQ.
A	13/64 DIA.	2
B	17/32 DIA.	1

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION			SYMBOL
		1/16 THICK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK, NEW YORK			
		COPPER	STRAP, CAP.			
		MATERIAL				
		HOT ROLLED	SRG	9013	12/19/65	
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		S245 SILVER PLATE				
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS4242 Ø	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	12-29-64	X	SRG		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A