


REQ. PER UNIT	USED ON			MS4247 Ø
	MODEL	ASS'Y. NO.	DATE	
1	PFCB-1		1-6-64	

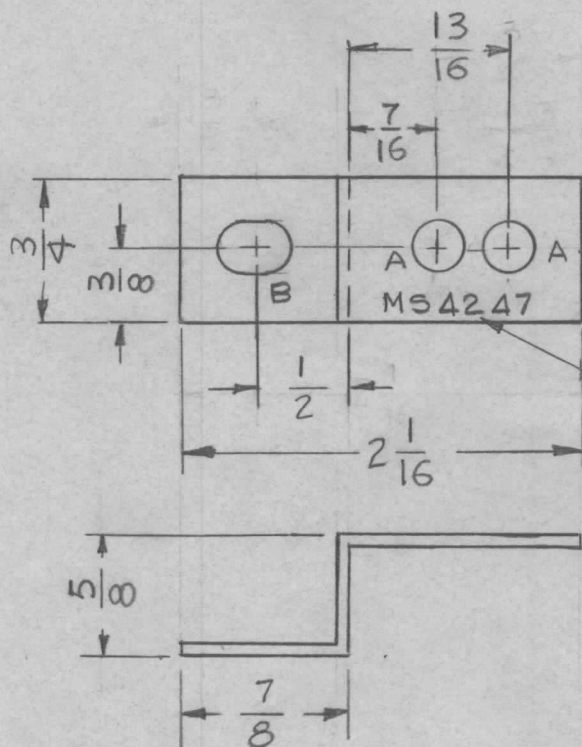

HOLE	DESCRIPTION	REQ.
A	1/4 DIA	2
B	1/4 x 3/8 SLOT	1

METAL STAMP TMC P/No.
1/8 HIGH GOTHIC WITH
LATEST REV. LETTER

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	O. POSE	DESCRIPTION	SYMBOL
Ø	ORIGINAL RELEASE FOR PRODUCTION	1-7-65	Ø	JL				.081 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	BRACKET, SWITCH LOCK
X	EXPER. RELEASE	1-6-65		G.D.L.			ALUMINUM				
								MATERIAL			
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1			5052-H32		G.D.L. 1-6-65 @ 1-6-65		
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A			5404 YEL IRIDITE		DRAWN	CHECKED	FINAL APPROVAL
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS4247 Ø