


REQ. PER UNIT	USED ON		MS4252	Ø
	MODEL	ASS'Y. NO.		
1	TER-25K-600B		JAN 4, 1965	

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

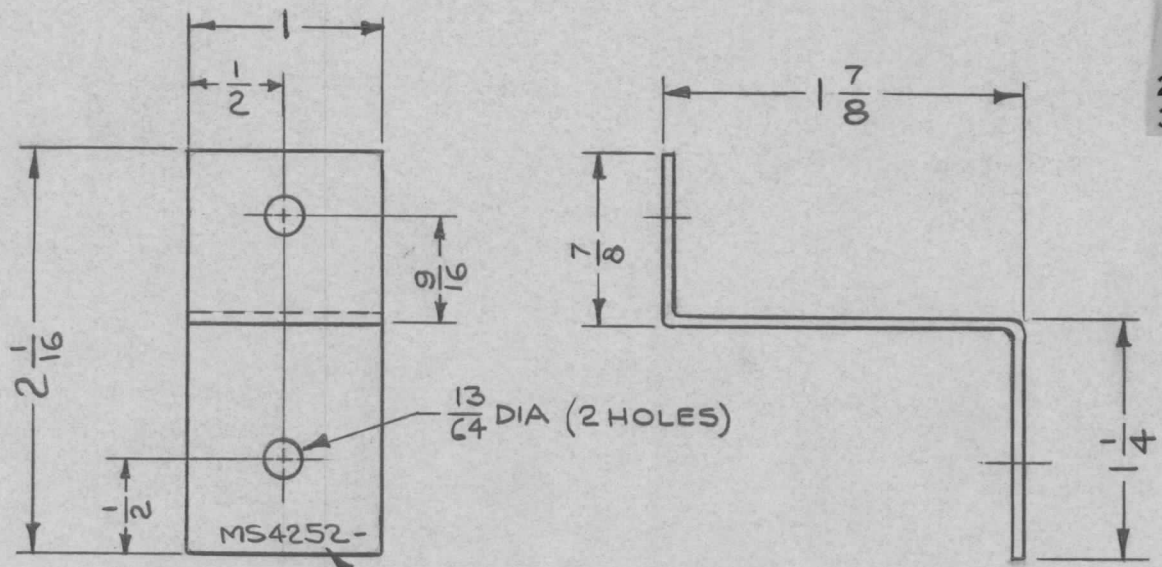

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC, WITH LATEST REVISION LETTER.

REQ. ITEM	PART NO.	BUDETTI	DESCRIPTION	SYMBOL					
	.040 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK						
	STOCK SIZE								
Ø ORIGINAL RELEASE FOR PRODUCTION	SOFT COPPER		BRACKET, GROUND						
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.			
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1						
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A						
	NONE	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL			
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			MS4252	Ø		