



REQ. PER UNIT	USED ON			MS4267 A
	MODEL	ASSY. NO.	DATE	
1	GPT 10K	A4117	1-15-65	

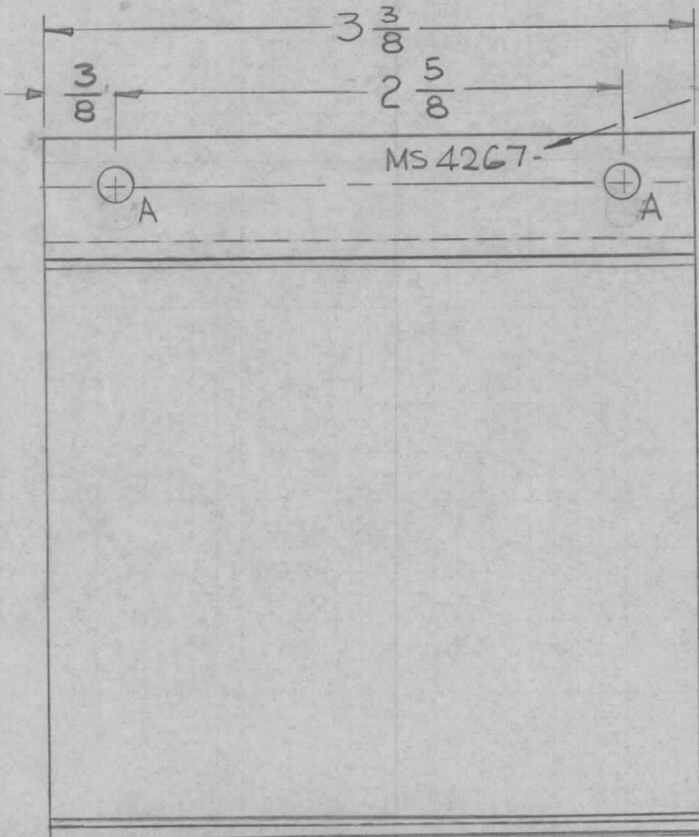

METAL STAMP TMC P/N
1/8 HIGH GOTHIC W/LATEST
REV. LETTER.

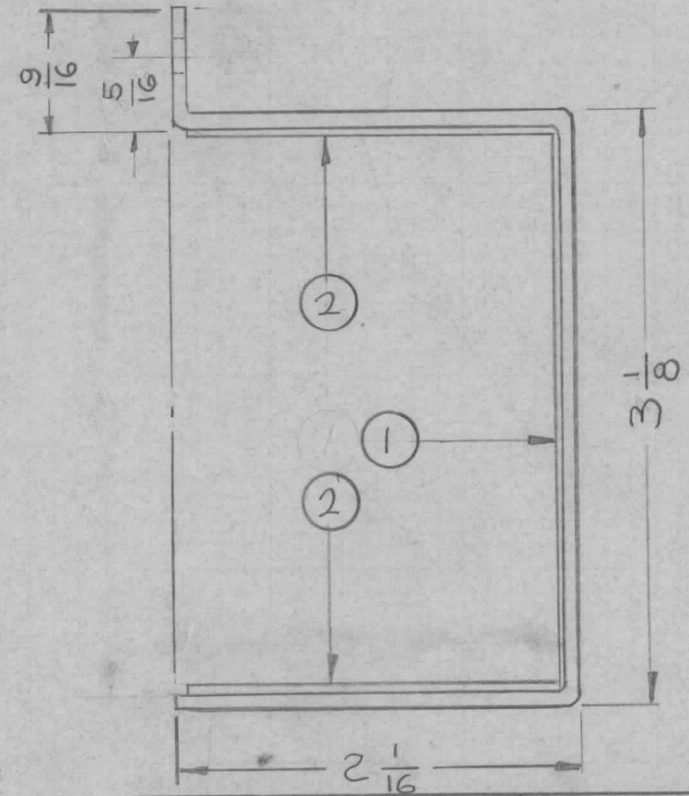

HOLES:
A- 11/64 DIA. (2REQ)

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REF: LD1745

X	3	GL102	ADHESIVE		
2	2	IM 179-18	INS. SH., ELECT.		
1	1	IM 179-17	INS. SH., ELECT.		
REQ. ITEM	PART NO.		F. BUDETTI	DESCRIPTION	SYMBOL
	.064 THK		THE TECHNICAL MATERIEL CORP.		
	STOCK SIZE		MAMARONECK, NEW YORK		
	ALUMINUM		COVER, TERM. STRIP		
MATERIAL					
5052 - H32			DRAWN	CHECKED	FINAL APPROVAL
TYPE & TEMPER		HEAT TREAT. SPEC.			
S404 YEL. IRIDITE					
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS4267 A	

A	IT 3. ADDED	6-22-65	14187	D.V.	8/15	203
Ø	ORIGINAL RELEASE FOR PRODUCTION	5.6.65	Ø	LL		
X ₁	TMC P/N WAS MS4067	1.15.65	X ₁	hB		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1:1				
DECIMALS	FRACTIONS	CODE				
.X ± .05	± 1/64	A				
.XX ± .01	ANGLES					
.XXX ± .005	± 0° 30'					