


REQ. PER UNIT	USED ON			MS4271	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TST-10K				

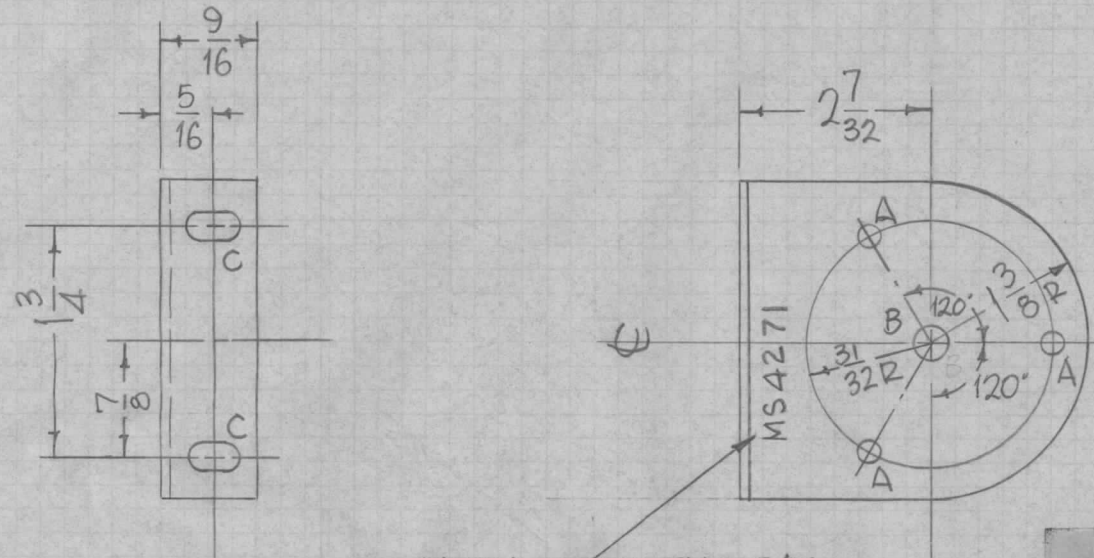

HOLES	REQ.
A-11/64 DIA.	3
B-1/4 DIA	1
C-1/4X3/8 SLOT	2

METAL STAMP TMC P/No.  
1/8 HIGH GOTHIC W/LATEST  
REV. LETTER

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES

SK3129

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE	7/15/69			W		1/16 THK			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X	METAL STAMP & UNLESS OTHERWISE SPEC. ADDED	7-7-65	X1		DL		COPPER				BRACKET & COIL MTG.	
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	DO NOT SCALE					HALF HARD		SRG		
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
	TOLERANCES							SIL PL -		A.A.		MS4271
								FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	Ø