REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS4288 Ø
1	TST( )10K		3-25-65	

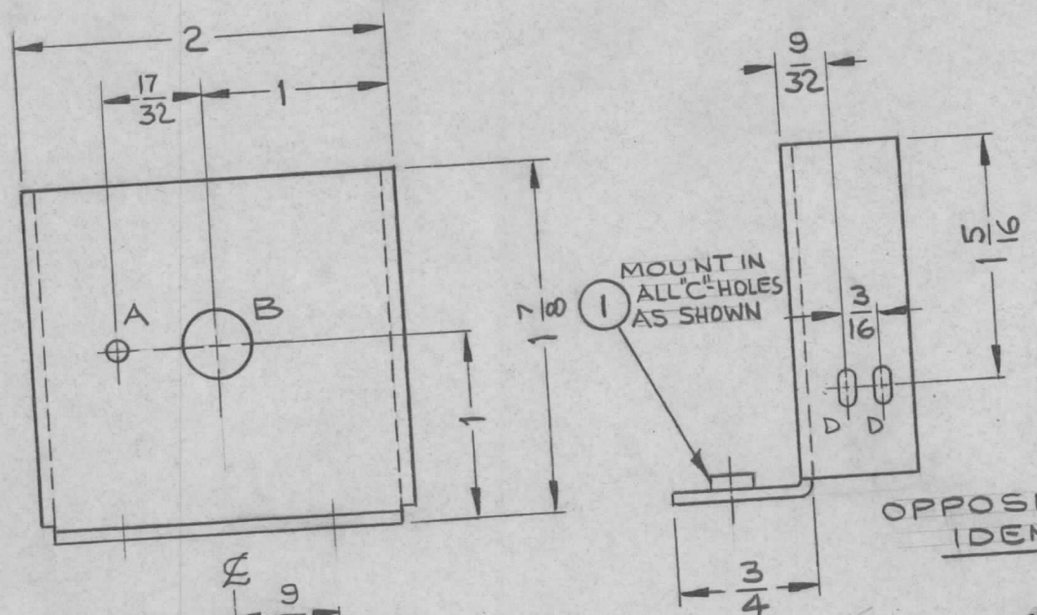

OPPOSITE SIDE IDENTICAL

HOLES:	REQ
A - 1/8 DIA	1
B - 3/8 DIA	1
C - .191 - .194 DIA.	2
D - 3/32 X 3/16 SLOT	4

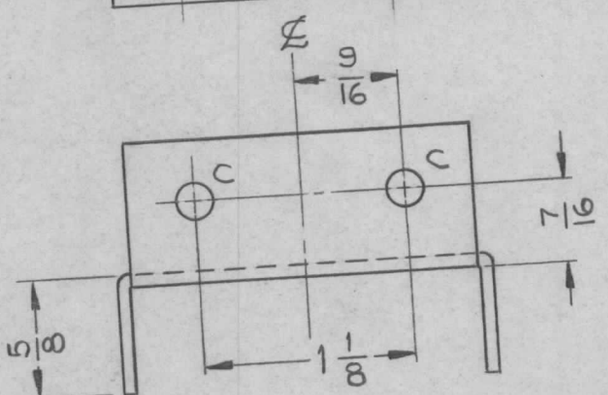

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	7/15/69		CW		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ±.05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	1	NT129-632-4	NUT, PLAIN, SPLINE	C

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

STOCK SIZE	MATERIAL	DRAWN	CHECKED	FINAL APPROVAL
.064 THICK	ALUMINUM	JTB		DJB 7/15/69
	5052 H32			
TYPE & TEMPER	HEAT TREAT. SPEC.			
S404 YEL. IRIDITE		ELEC. DES. APP. AVC	MECH. DES. APP. P.S.	MS4288 Ø
FINISH & SPEC. NO.				

REPROVEL NO. 440H 23845

TMC FORM 108-A