

HOLES:


A ~ DR. 120 DIA. C'SINK 82° X .230 DIA. (8 REQ.)

MARK TMC PART NO. *MS4293*
 1/8 HIGH GOTHIC W/LATEST
 REV. LETTER.

| | | | | |
|---------------|----------|------------|---------|--------------------|
| REQ. PER UNIT | USED ON | | | MS4293 \emptyset |
| | MODEL | ASS'Y. NO. | DATE | |
| 1 | TSTE-10K | AX580 | 3-22-65 | |

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

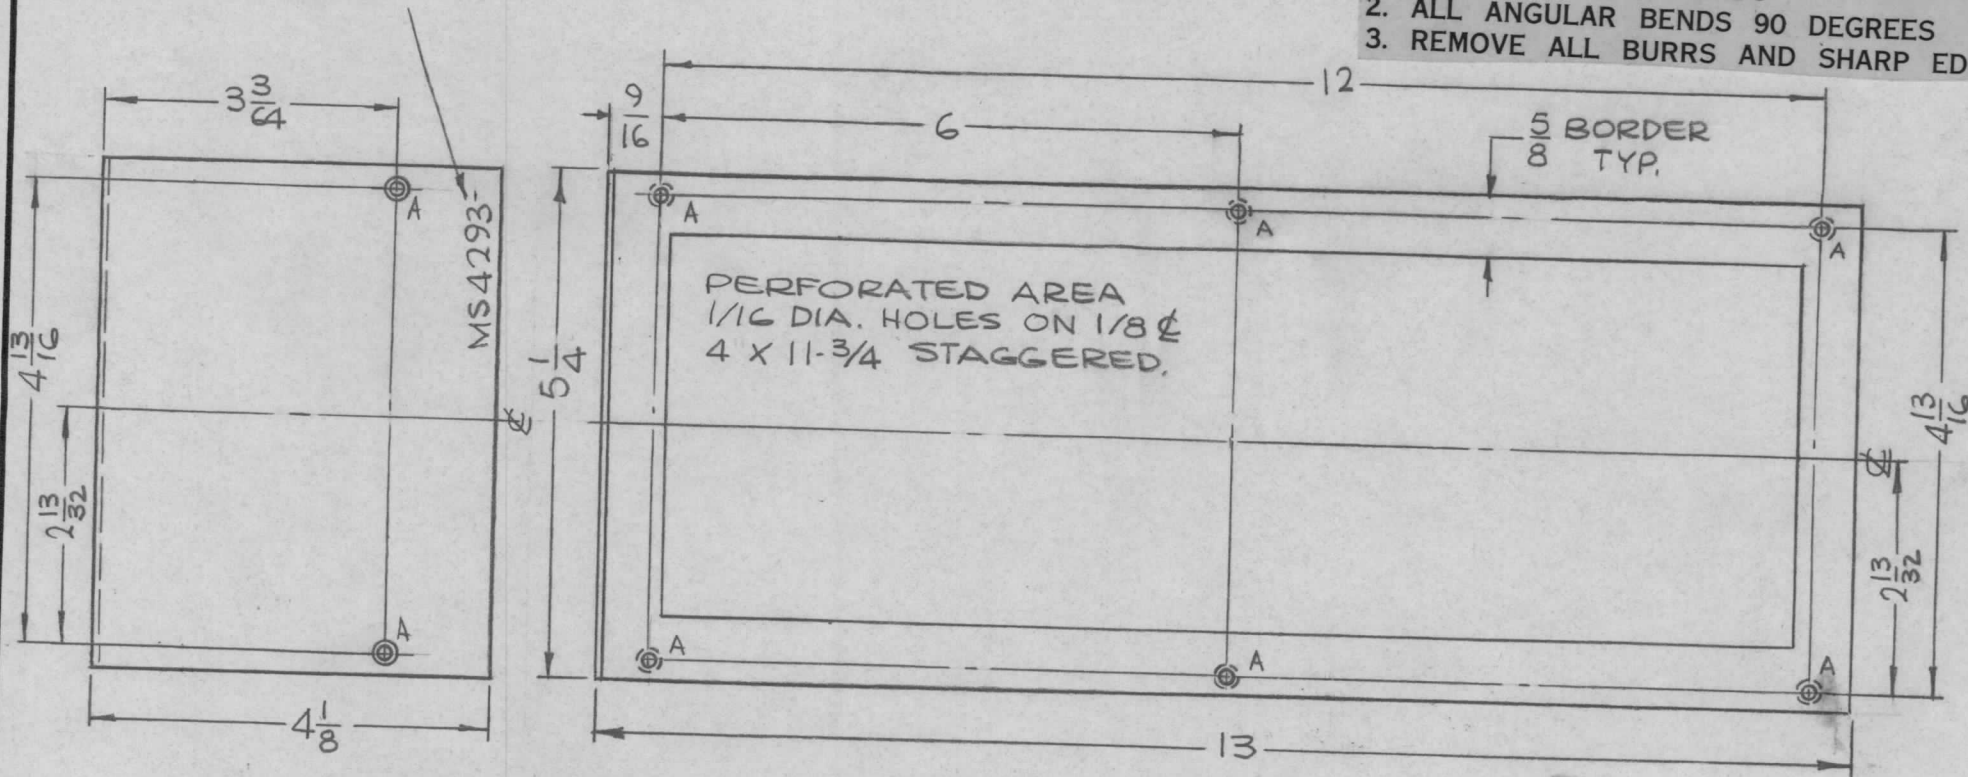

| | | | | | | | | | |
|---|---------------------------------|--------------------|---------|-------------------|-----------------|------------------------------|----------------|--------|--|
| | | | | REQ. ITEM | PART NO. | F. BUDETTI | DESCRIPTION | SYMBOL | |
| | | | | .054 THICK | | THE TECHNICAL MATERIEL CORP. | | | |
| | | | | STOCK SIZE | | MAMARONECK, NEW YORK | | | |
| \emptyset | ORIGINAL RELEASE FOR PRODUCTION | 6.23.66 | # | WHD | ALUMINUM | PLATE, SIDE, MODULE | | | |
| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | | SCALE | 1/2:1 | | | | | | |
| DECIMALS | FRACTIONS | CODE | | | | | | | |
| .X \pm .05 | \pm 1/64 | A | | | | | | | |
| .XX \pm .01 | ANGLES | | | | | | | | |
| .XXX \pm .005 | \pm 0° 30' | | | | | | | | |
| TOLERANCES | | TYPE & TEMPER | | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL | | |
| | | 5052-H32 | | | SRG | JCB | OJ.B | | |
| | | S404 YEL. IRIDITE | | | QA 6-22-66 | | | | |
| | | FINISH & SPEC. NO. | | ELEC. DES. APP. | MECH. DES. APP. | MS4293 \emptyset | | | |