


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
5	TST(1)10K		3-19-65

MS4294

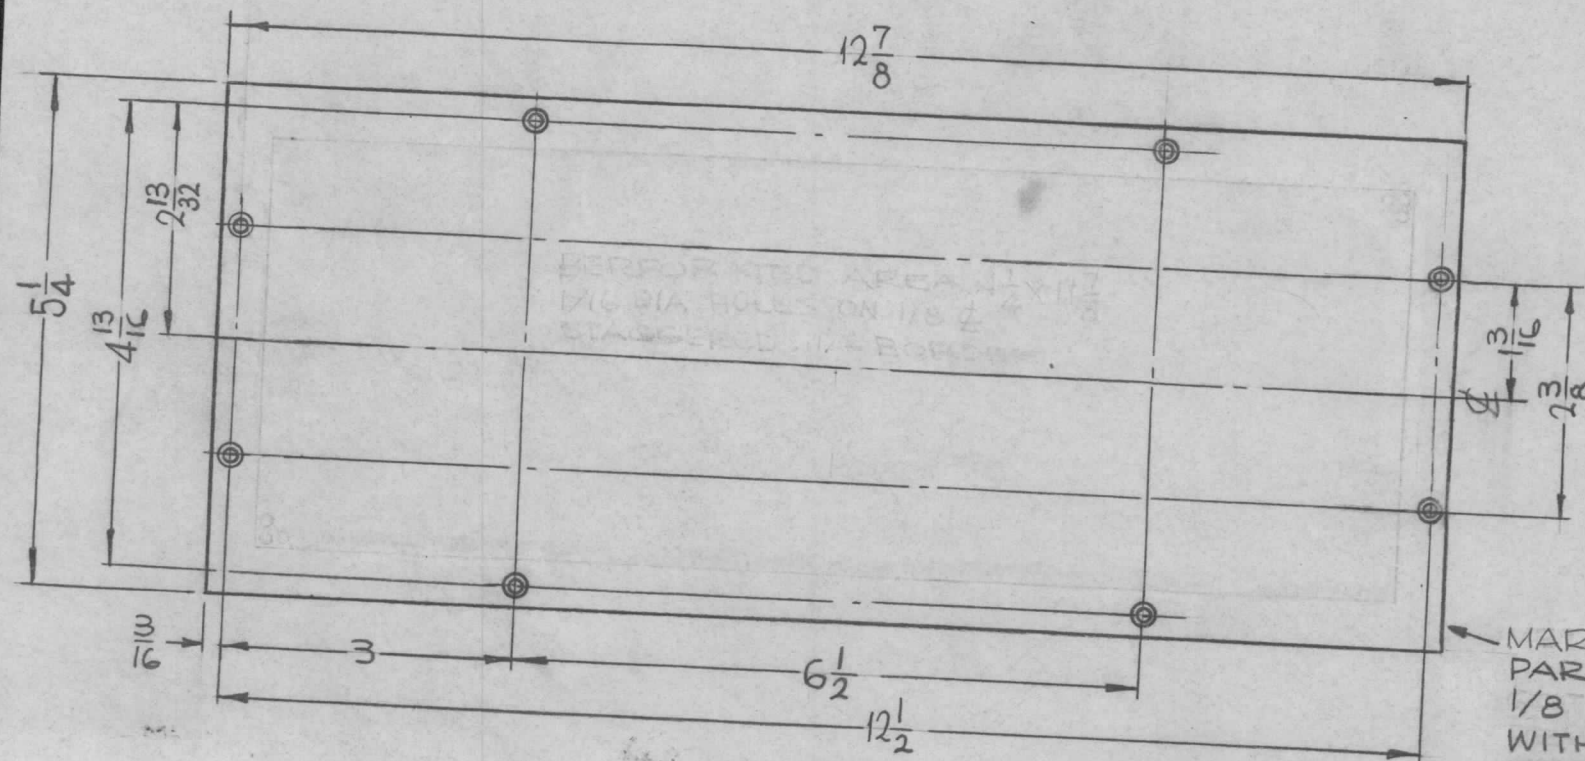

HOLES:
 A ~ DRILL .120 DIA.
 C'SINK 82° X
 .230 DIA.
 (8REQ.)

MARK TMC
 PART NO. (MS4924-)
 1/8 HIGH GOTHIC
 WITH LATEST REV.
 LETTER.
 ON OPPOSITE SIDE

REF: { LD1965-
 LD1966-
 LD1967.

ORIGINAL RELEASE FOR PRODUCTION				8-3-66		RME		REQ. ITEM		PART NO.		F. BUDETTI		DESCRIPTION		SYMBOL	
PERFORATED AREA 4-1/4 X 11-7/8 DELETED				7-9-65		G.D.L. DA		.051 THICK		ALUMINUM		SRG		JCS		O.B.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES				SCALE		1/2 : 1		STOCK SIZE		5052-H32		DRAWN		CHECKED		FINAL APPROVAL	
TOLERANCES				CODE		A		MATERIAL		5404 YEL IRIDITE 14-2 AL-COAT		ELEC. DES. APP.		MECH. DES. APP.		MS4294	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005				FRACTIONS ± 1/64 ANGLES ± 0° 30'				TYPE & TEMPER		HEAT TREAT. SPEC.							