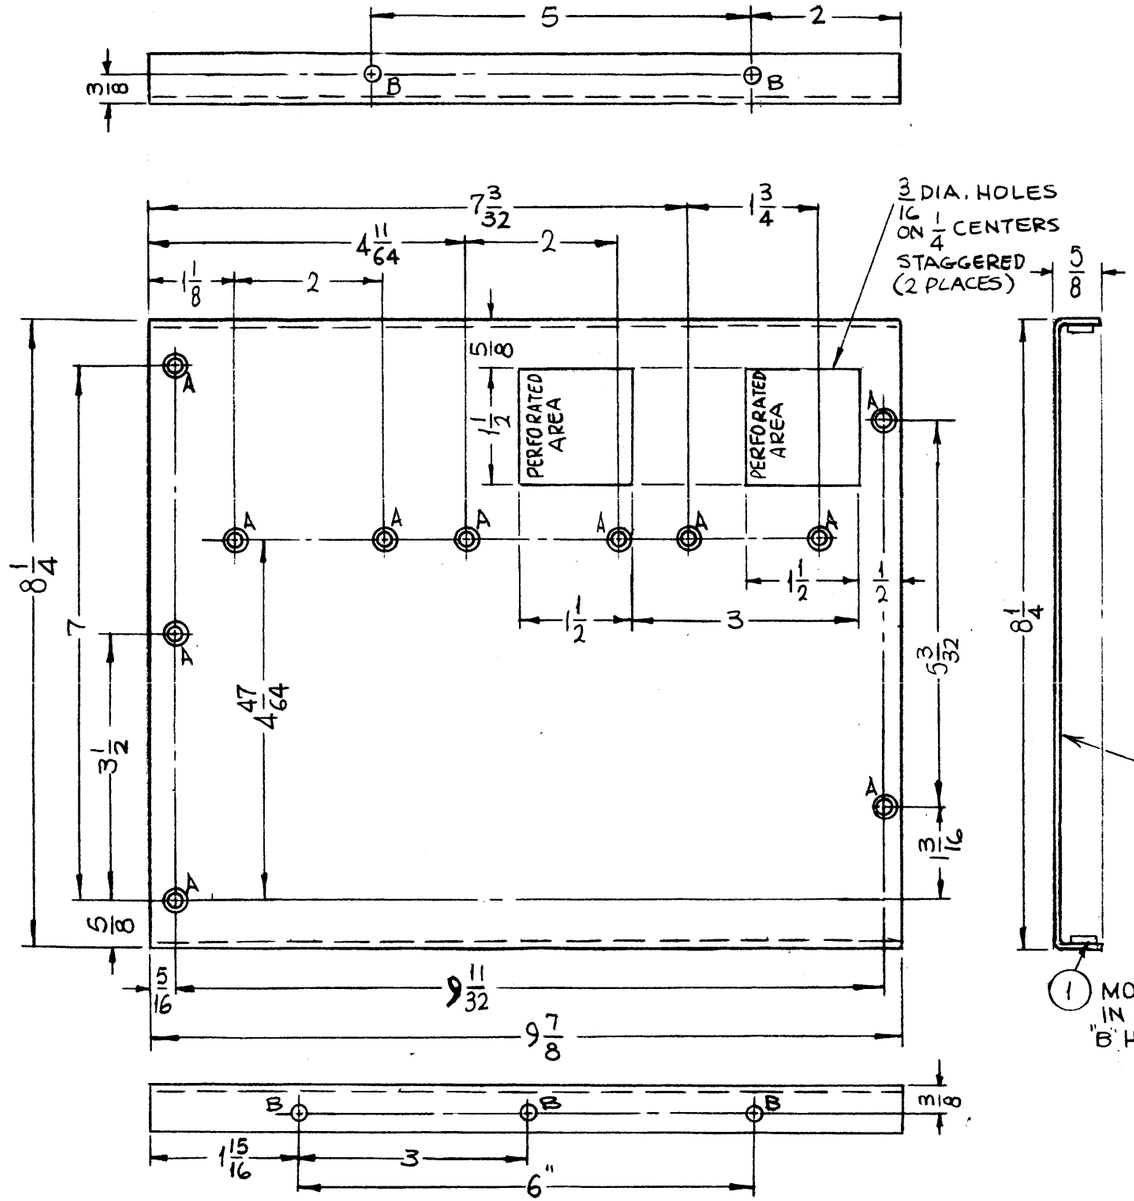

Ø

MS4308

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	12-10-64	X	SRG		
X1	DIM. 9.11/32 WAS 9.1/64, A HOLES WERE 5/32	12-18-64	X1	SRG		
X2	C HOLES ADDED	1-6-65	X2	SRG		
X3	A HOLES WERE 11/64 DIA.	1-26-65	X3	SRG		
X4	2 FASTENERS REMOVED TOP LIP,	1-26-65	X4	SRG		
X5	PERFORATED AREA ADDED	2-19-65	X5	SRG		
X6	3/16R. NOTCH ADDED	7-29-65	X6	[illegible]		
X7	PERFORATED AREA HOLES ADDED, REMOVED NOTCH ON TOP VIEW	9-14-65	X7	[illegible]		MMK
Ø	ORIGINAL RELEASE FOR PRODUCTION	4-12-66	Ø	G.D.L		HQ

HOLES	DESCRIPTION	REQ.
A	DR. 144 DIA. C'SINK 82° X .284 DIA.	11
B	.191-.194 DIA.	5

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

NOTES

1	RFTA-1	A5348
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.

SCALE 1/2:1 | CODE A

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
5	1	NT 129-632-4	NUT, PLAIN, SPLINE	B

F. BUDETTI — LIST OF MATERIAL

MATERIAL: .081 THICK ALUMINUM 5052-H32

FINISH: S404 YELLOW IRIDITE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64, ANGLES ± 0° 30'

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

TITLE: PLATE, LEFT SIDE

DRAWN SRG	DATE 12-10-64	FINAL APPROVAL [illegible]	DATE 4/7/66
CHECKED [illegible]	DATE 4/5/66	MS4308	Ø
ELECT. DES. [illegible]	DATE 4-7-66		
MECH. DES [illegible]	DATE	SHEET	REV. LTR.
M/L [illegible]	4/12/66		

TMC FORM 109

REPROVEL NO. 440H 15107