REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXP. RELEASE	12-15-64	X	SRG		
X_1	2 E HOLES ADDED, 10" LIP CUT OFF	12-24-64	X	SRG		
X_2	GROMMET SLOT DELETED	1-5-65	X2	SRG		
X3	1 B HOLE ADDED, 3/8 DIM. FOR B HOLES WAS 29/64, F&G ADDED	1-6-65	X3	SRG		
X4	7/8 WAS 2", 6 1/8 WAS 5, 14 1/2 WAS 13 3/8	1-18-65	X4	SRG		
X5	1 D & 1 H HOLES ADDED	1-19-65	X5	SRG		
X6	7 5/8 WAS 6 1/8, 9/32 WAS .20	1-25-65	X6	SRG		
X7	2G HOLES ADDED, E HOLES WERE FASTENERS, 1 1/8 WAS 1	1-26-65	X7	SRG		
X_8	1 D & 1 C HOLES DELETED ALL G HOLES REDESIGNATED AS C HOLES	5-11-65	X_8	[illegible]		
X9	1 B HOLE DELETED	9-14-65	X9	[illegible]		
Ø	ORIGINAL RELEASE FOR PRODUCTION	4-12-66	Ø	GDL		

MS4321 Ø

MARK TMC PART NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

(1) MOUNT IN ALL "A" HOLES.

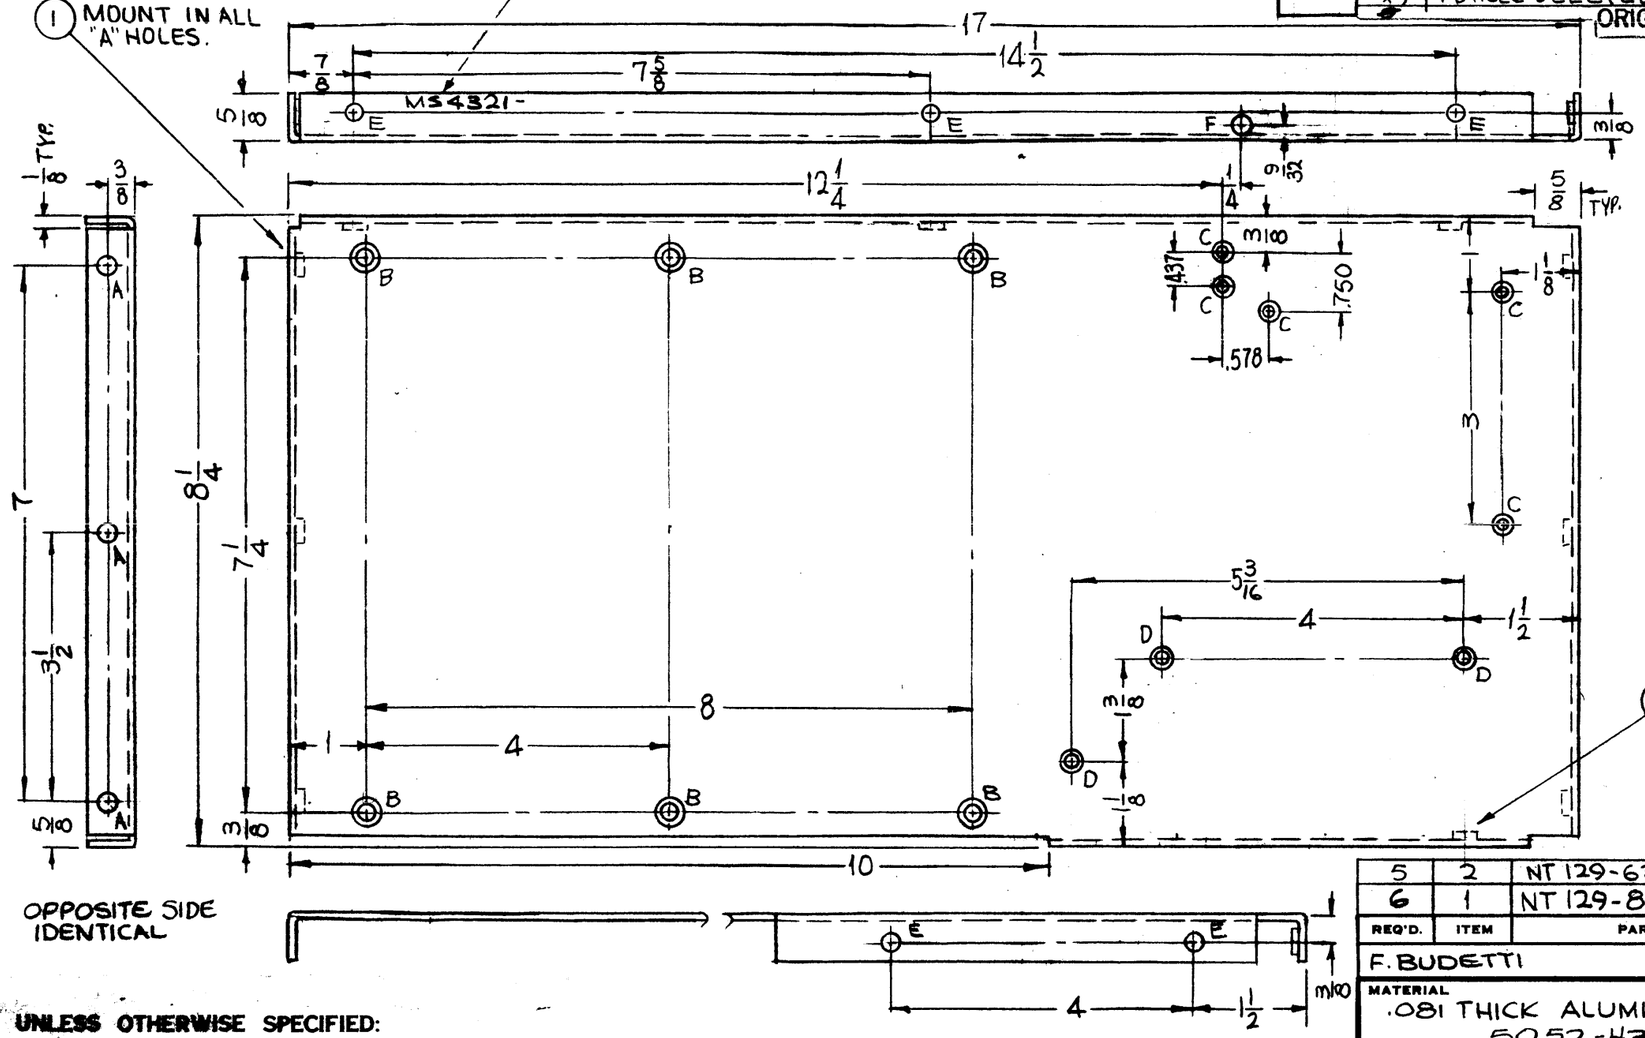

HOLES	DESCRIPTION	REQ.
A	.221-.224 DIA.	6
B	DR. 169 C'SINK 82°X.337 DIA.	6
C	DR. 120 C'SINK 82°x.230 DIA.	5
D	DR. 144 C'SINK 82°X.284 DIA.	3
E	.191-.194 DIA.	5
F	7/32 DIA.	1

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
5	2	NT 129-632-4	NUT, PLAIN, SPLINE	E
6	1	NT 129-832-4	NUT, PLAIN, SPLINE	A

F. BUDETTI — LIST OF MATERIAL

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

NOTES

1	RFTA-1	A5348
Q'T'Y./UNIT	MODEL USED ON	ASS'Y. NO.

SCALE 1/2 | CODE A

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

MATERIAL: .081 THICK ALUMINUM 5052-H32

FINISH: S404 YEL. IRIDITE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64, ANGLES ± 0° 30'

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: PLATE, RIGHT, SIDE

DRAWN SRG	DATE 12-15-64	FINAL APPROVAL	DATE 4/7/66
CHECKED	DATE 4-6-66	MS4321	Ø
ELECT. DES.	DATE 4-7-66	SHEET	REV. LTR.
MECH. DES.	DATE 4/12/66		

TMC FORM 109

STOCK N . 440H