


REQ. PER UNIT	USED ON			MS4325	Ø
	MODEL	ASS'Y. NO.	DATE		
2	RFTA-1	A5348	1-20-65		

MARK TMC PART NO. 3/32 HIGH GOTHIC W/LATEST REV. LETTER.

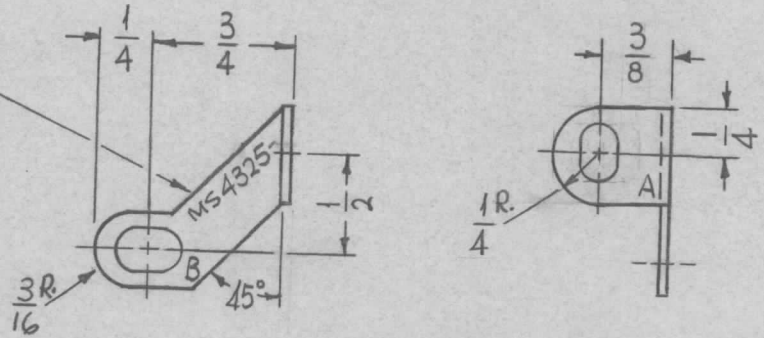

SLOT	DESCRIPTION	REQ.
A	3/16 X 5/16	1
B	7/32 X 5/16	1

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. ROUND ALL CORNERS & EDGES.

Ø	ORIGINAL RELEASE	4-12-66	Ø	G.DL	Jde	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
XI	TMC PT NO WAS 1/8 HIGH METAL STAMP ETC	4-5-66	-H	Jc		.040 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
X	EXP. RELEASE	1-20-65	X	SRG		COPPER		LEAD, ELECTRICAL			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	SOFT ROLLED	SRG	JCB	M. Han
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1			TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A			S245-SILVER PLATE S423-SILVER KOTE		QA 4-7-66	JCB	MS4325
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	Ø	