

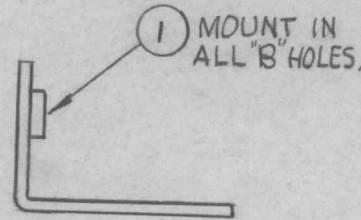


REQ. PER UNIT	USED ON			MS4335 $\emptyset$
	MODEL	ASS'Y. NO.	DATE	
1	RFTA-1	A5348	1-28-65	

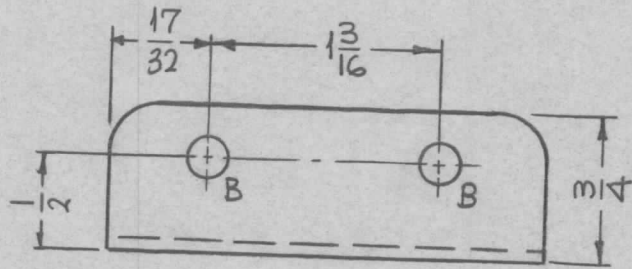

HOLES	DESCRIPTION	REQ.
A	13/64 DIA.	2
B	.221-.224 DIA.	2

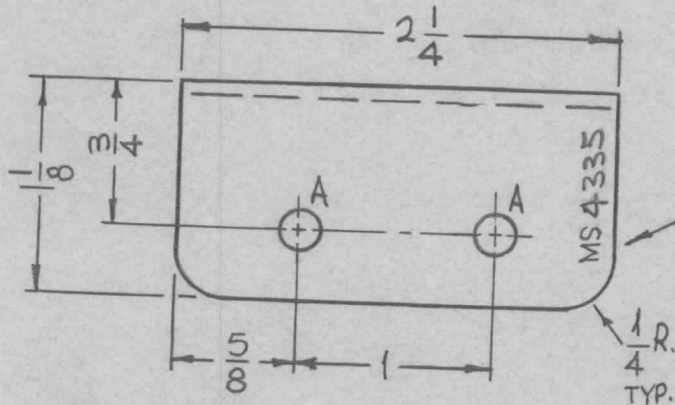

MARK TMC PART NUMBER 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

2	1	NT 129-832-4	NUT, PLAIN, SPLINE		B
REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION		SYMBOL
.081 THICK			THE TECHNICAL MATERIEL CORP.		
STOCK SIZE			MAMARONECK. NEW YORK		
ALUMINUM			BRACKET, CAPACITOR MTG.		
MATERIAL					
5052-H32		SRG	QC	203	M. H. Key
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
5245 SILVER PLATE			aa 5/20/62	RS	MS4335 $\emptyset$
5423 SILVER KOTE					
FINISH & SPEC. NO.			ELEC. DES. APP.	MECH. DES. APP.	
			ML 5/20/62	5/20/62	

$\emptyset$	ORIGINAL RELEASE FOR PRODUCTION	5/20/66	$\emptyset$	CV		
X	EXP. RELEASE	1-28-65	X	SRG		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1			
DECIMALS .X $\pm$ .05 .XX $\pm$ .01 .XXX $\pm$ .005	TOLERANCES	FRACTIONS $\pm$ 1/64 ANGLES $\pm$ 0° 30'	CODE	A		