


REQ. PER UNIT	USED ON			MS4339 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	KIT-215	AX-546	2-25-65	

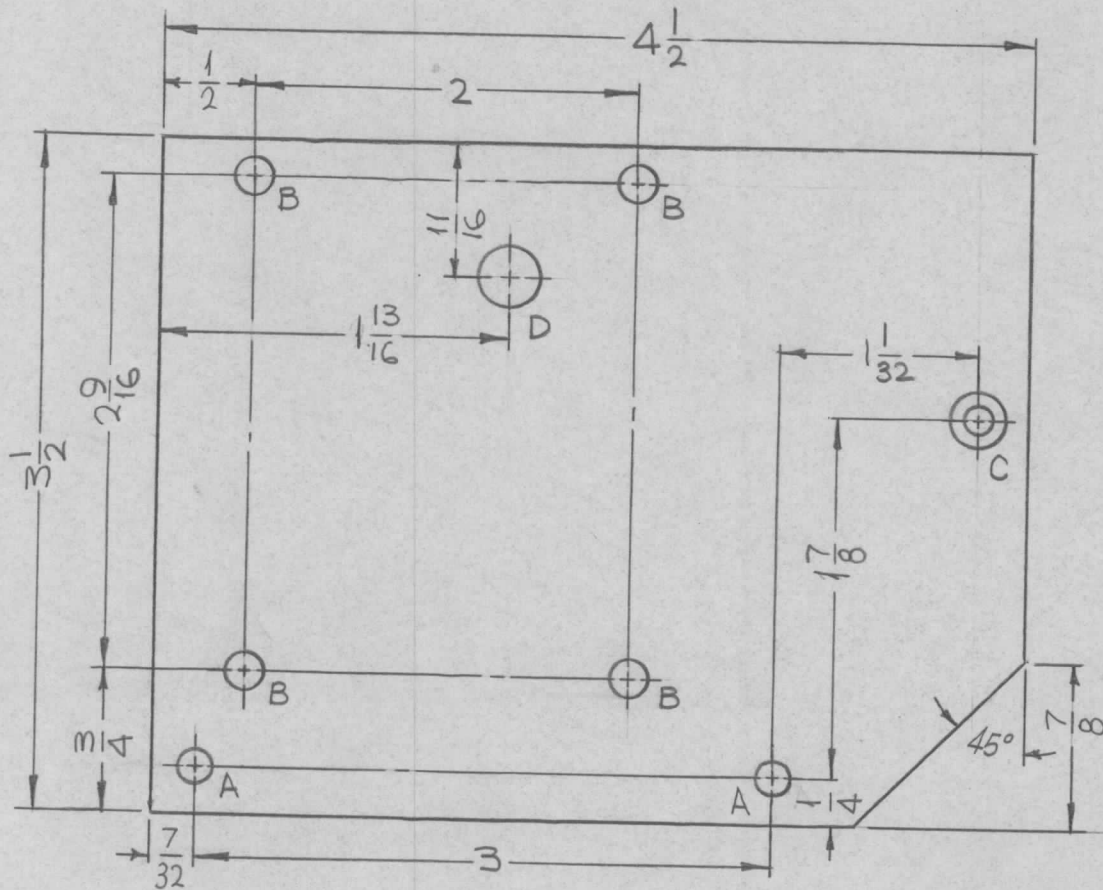

HOLES	DESCRIPTION	REQ.
A	11/64 DIA.	2
B	.191-.194 DIA.	4
C	DR.144 C'SINK 82°X.284 DIA	1
D	5/16 DIA.	1

1 MOUNT IN ALL B HOLES.

METAL STAMP TMC PART NO. (MS4339) 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

ORIGINAL RELEASE FOR PRODUCTION				3-2-65	<i>SRG</i>				4	1	NT129-632-4	NUT, PLAIN, SPLINE	B	
EXP. RELEASE				2-25-65	X	SRG			REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES				SCALE	1:1				.064 THICK STOCK SIZE					
TOLERANCES				FRACTIONS	± 1/64				ALUMINUM MATERIAL					
DECIMALS				CODE	A				5052-H32					
ANGLES				± 0° 30'				S404 YEL. IRIDITE						
FINISHES								SRG						
TYPE & TEMPER				HEAT TREAT. SPEC.				DRAWN		CHECKED		FINAL APPROVAL		
FINISH & SPEC. NO.				ELEC. DES. APP.				MECH. DES. APP.		MS4339 \emptyset				