


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
	Ø	ORIGINAL RELEASE FOR PRODUCTION	8-25-64		RME	
X1		SMALL SLOT WAS 1/2 R				
X2		D.C. HOLES DIM 1/8 WAS 1/16, 2 WAS 3/16	3-16-65		SRC	
X3		DIM 5/4 WAS 6, 32/32 WAS 10/16, 4/18 WAS 4/14	3-23-65			
X4		DIM 7/8 WAS 1, DIM 9/32 WAS 10 3/8	4-24-65			
X5		4 FHOLES ADDED	7-19-65		G-DL	
X6		DIM 1 1/8 WAS 15/16	7-20-65		S-DL	

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES
  4. MOUNT INSERTS AFTER FINISHING

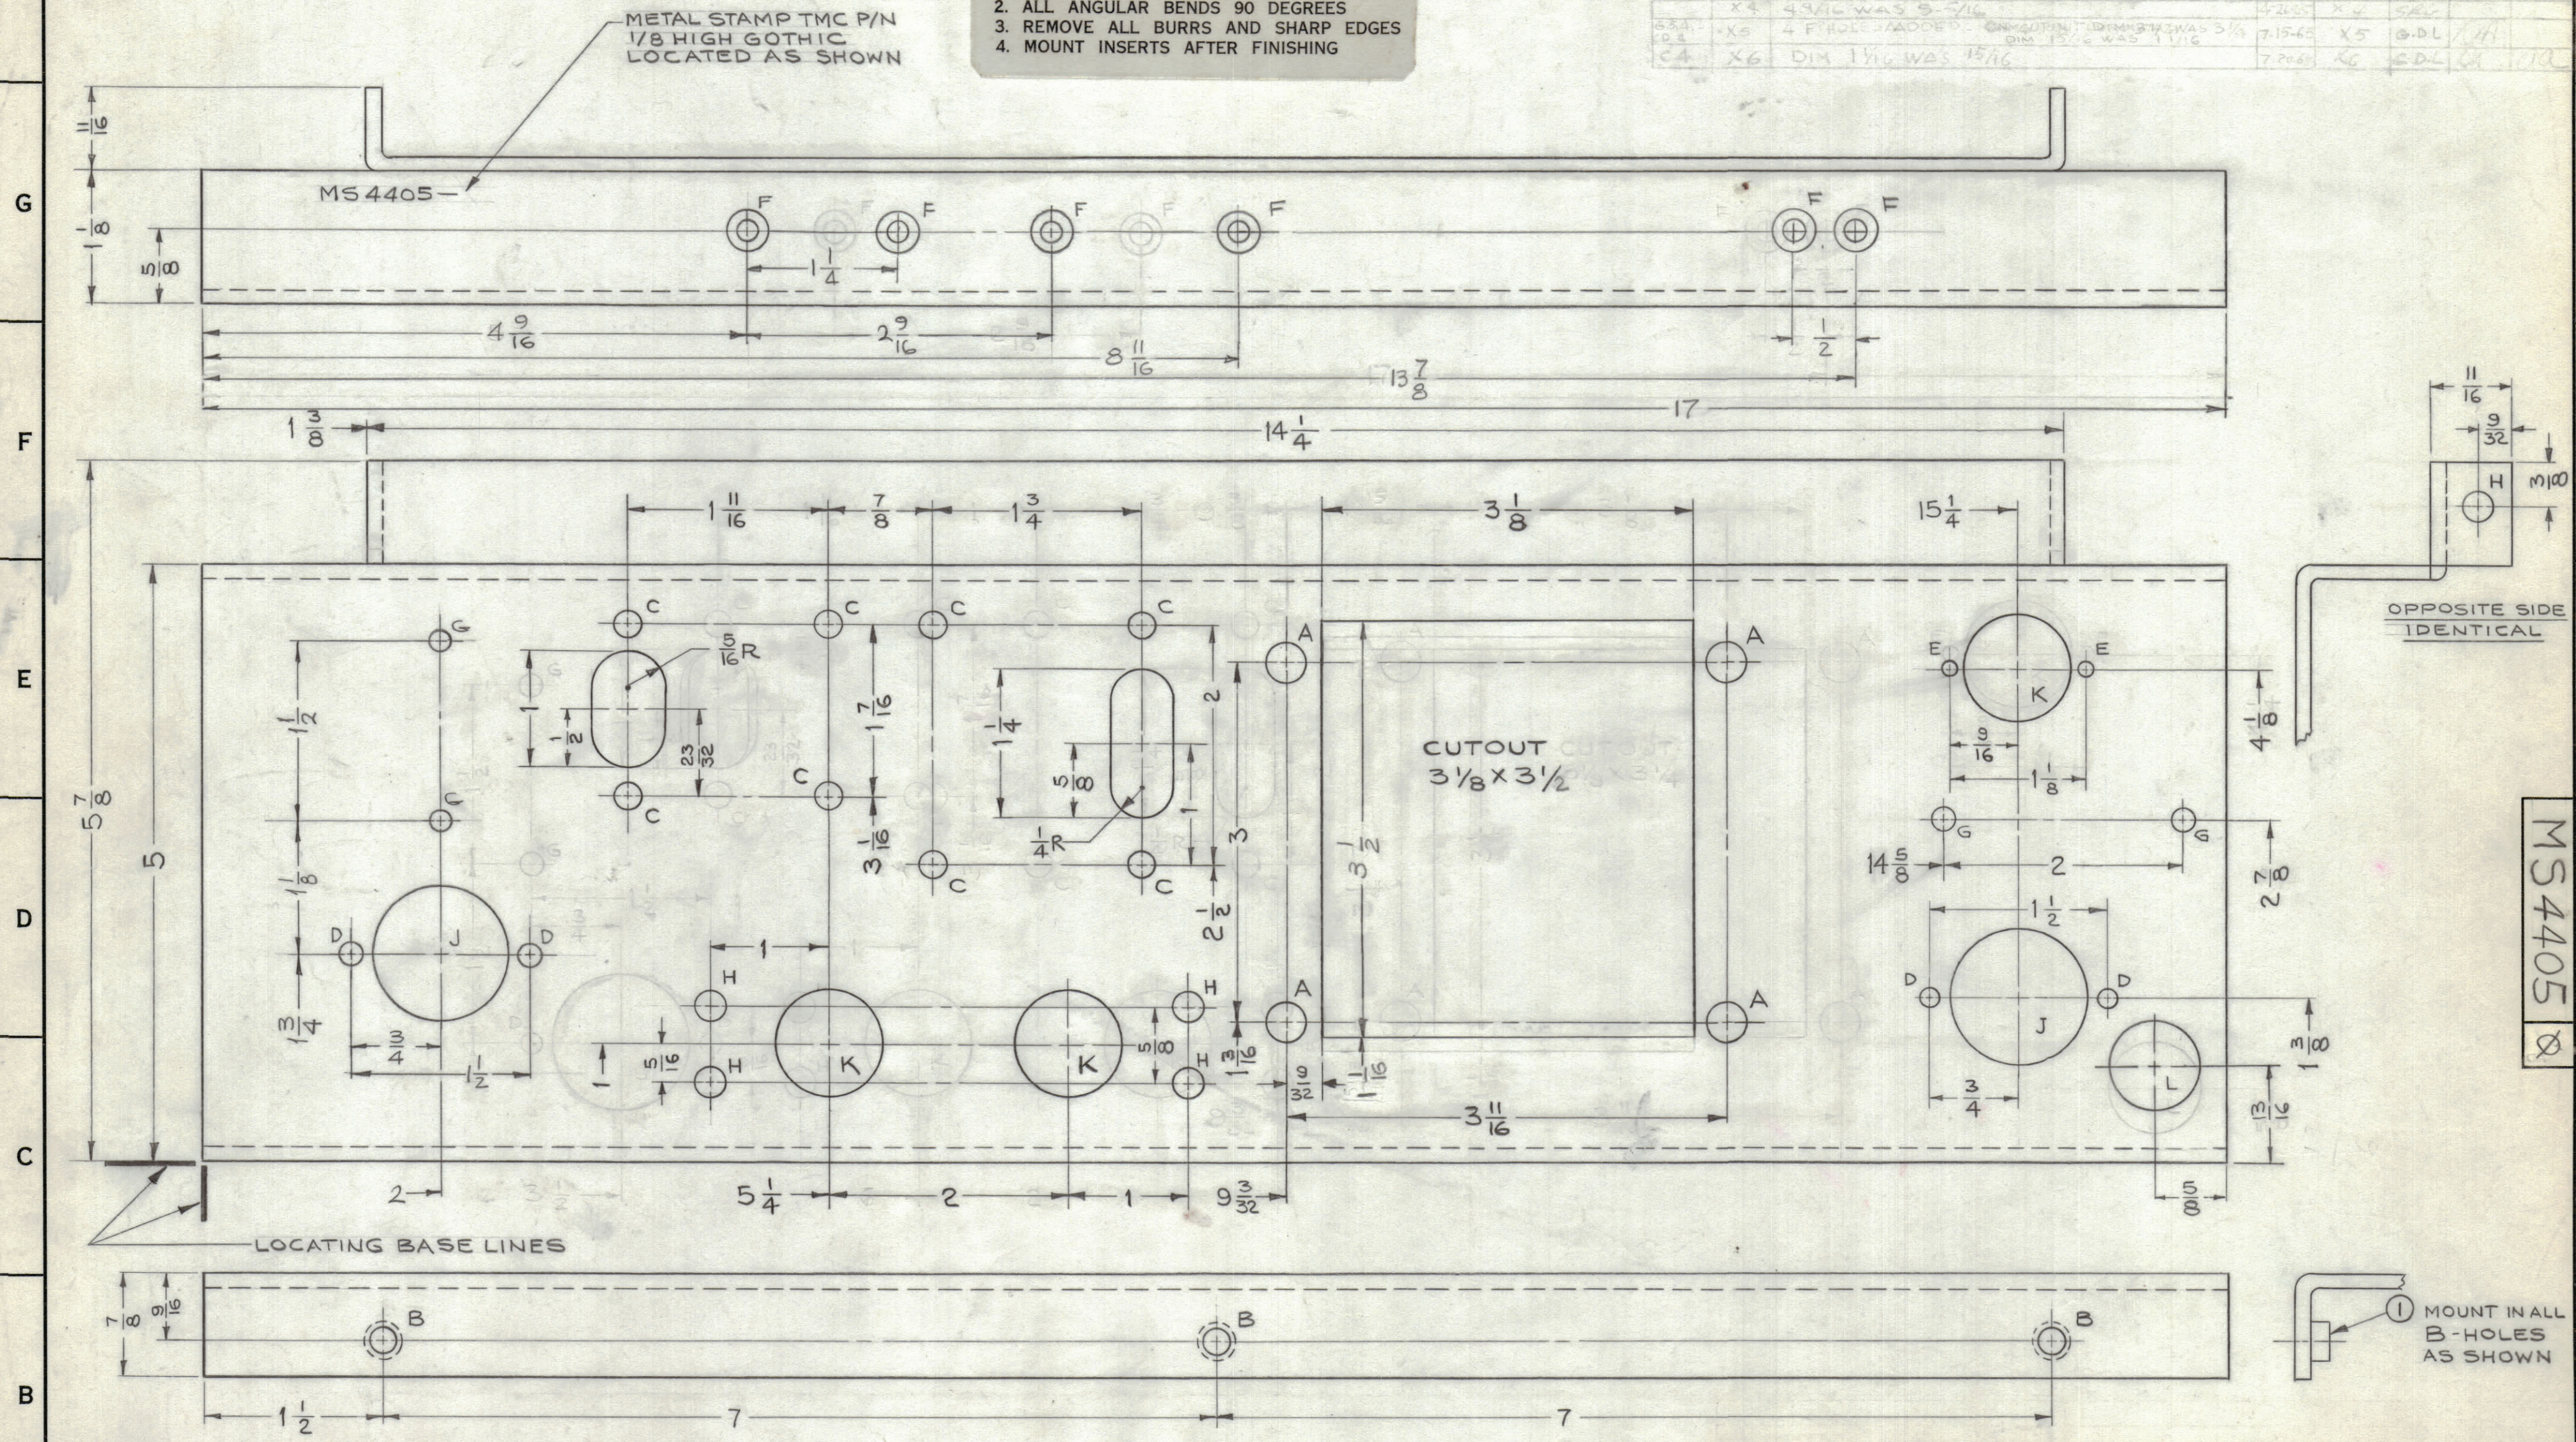

HOLE	DESCRIPTION	REQ
A	5/16 DIA	4
B	.250 - .253 DIA	3
C	13/64 DIA	8
D	5/32 DIA	4
E	1/8 DIA	2
F	DRILL & C'SINK FOR 6-32 FHS	6
G	11/64 DIA	4
H	15/64 DIA	6

HOLE	DESCRIPTION	REQ
J	1/8 DIA	2
K	7/8 DIA	3
L	3/4 DIA	1

NOTES

Q'TY/UNIT	TST( ) 10K	AP126
SCALE	1:1	A

3	1	NT129-1032-6	NUT, PLAIN, SPLINE	B
REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
F. BUDETTI LIST OF MATERIAL				
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
1/8THK ALUMINUM		TITLE		
S404 YELL. IRIDITE		CHASSIS, LEFT SIDE		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DECIMALS	FRACTIONS	TOLERANCES	
.X ± .05	.XX ± .01	± 1/64	ANGLES ± 0° 30'	
.XXX ± .005				
DRAWN	DATE	FINAL APPROVAL	DATE	
hro	2.16.65	Ø R	8/24/66	
CHECKED	DATE	MS4405		Ø 5
hro	8/24/66			
ELECT. DES.	DATE			
MECH. DES.	DATE			
		SHEET		REV. LTR.