


REQ. PER UNIT	USED ON			MS4432	Q
	MODEL	ASS'Y. NO.	DATE		
1	RFTA-1		3-9-65		

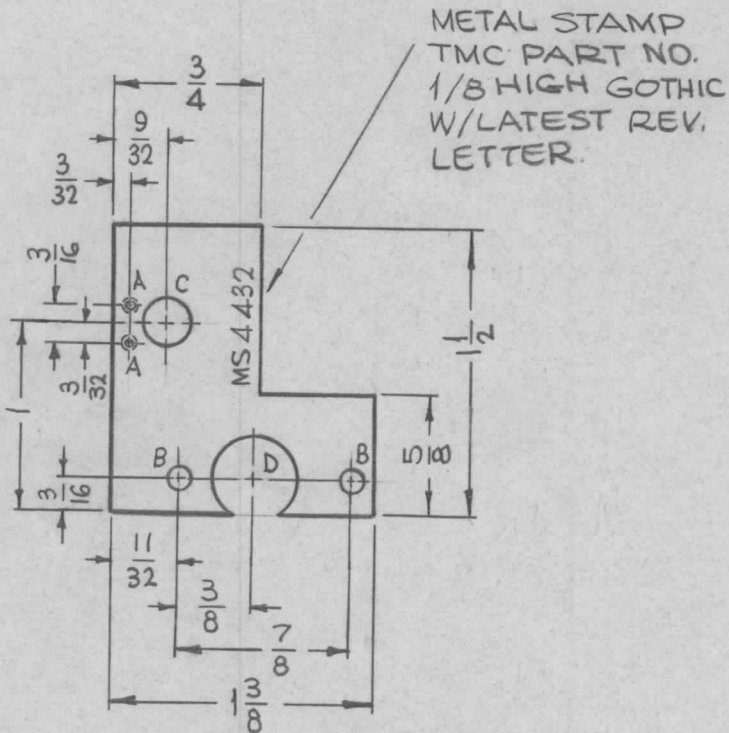

HOLES	DESCRIPTION	REQ.
A	DRILL & TAP FOR 2-56	2
B	1/8 DIA.	2
C	1/4 DIA.	1
D	7/16 DIA.	1

						REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
Ø	ORIGINAL RELEASE	6-27-69		RS		1/8 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X	EXP. RELEASE	3-9-65	X	SRG		ALUMINUM		BRACKET, MTG. MINIATURE SWITCH		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1		5052-H32		SRG		SRG
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
						S404 YEL. IRIDITE				MS4432
						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	Q