REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS4446	Ø
2	GPT-200K		3-16-65		

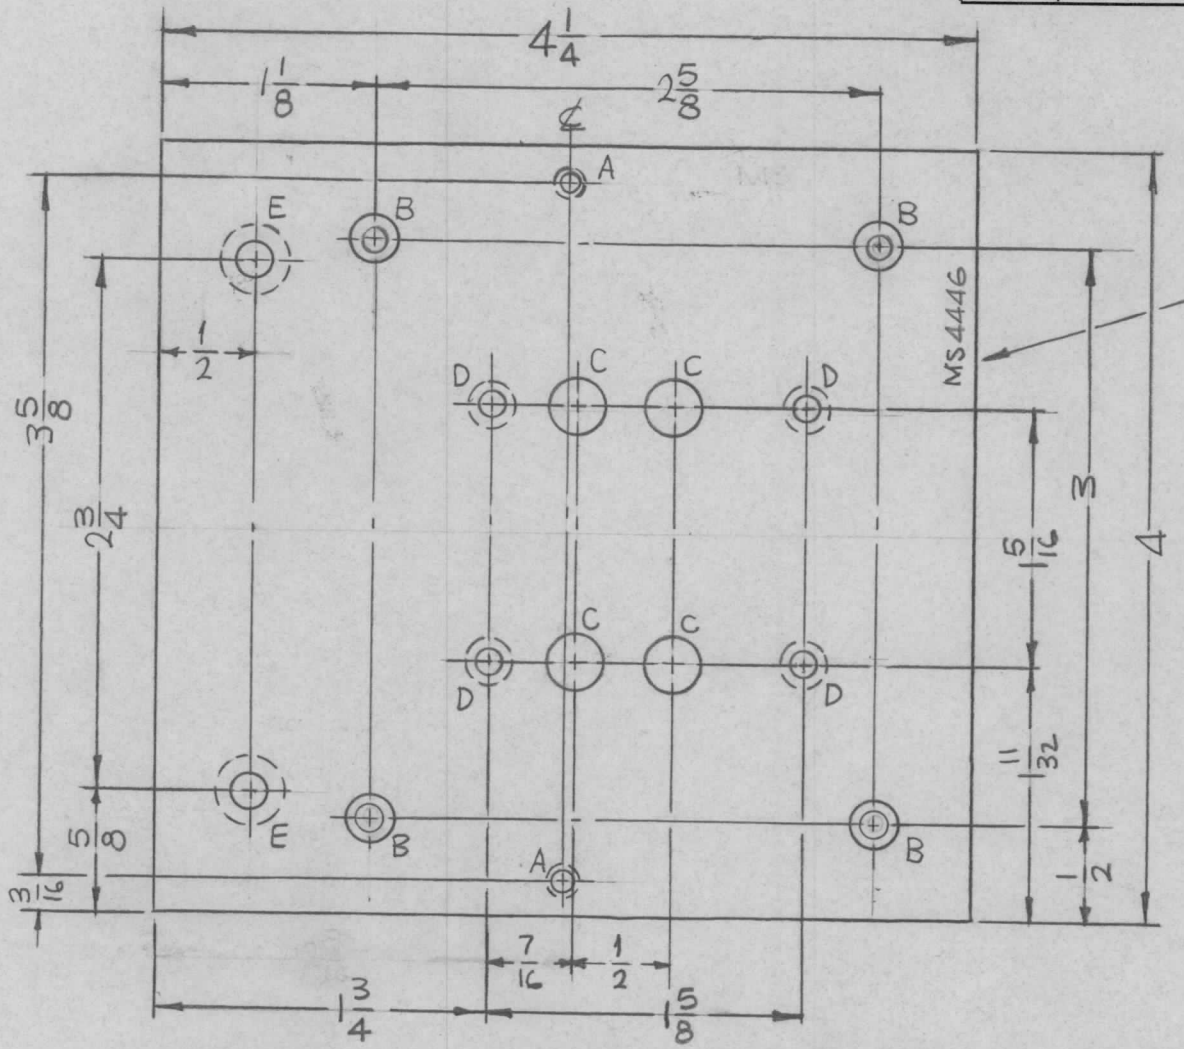

HOLES	DESCRIPTION	REQ.
A	DRILL & TAP FOR 10-32	2
B	DR. .196 DIA C'SINK 82° X .390	4
C	.9/32 DIA.	4
D	DR. 120 DIA. C'SINK 82° X .230 D.	4
E	DR. 169 DIA. C'SINK 82° X .337 D.	2

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/20/65	~~AA~~	SRG		
X1	(B) HOLES WERE 15/64	4/12/65		CJL		
X	EXP. RELEASE					

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30′

SCALE 1:1

CODE A

REQ.	ITEM	PART NO.
1/8 THICK		
STOCK SIZE		
ALUMINUM		
MATERIAL		
5052-H32		
TYPE & TEMPER	HEAT TREAT. SPEC.	
5404 YELLOW IRIDITE		
FINISH & SPEC. NO.		

F. BUDETTI DESCRIPTION — SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

PLATE, MTG RELAY RESISTOR UNIT

DRAWN	CHECKED	FINAL APPROVAL
SRG	JCB	DJB
ELEC. DES. APP.	MECH. DES. APP.	MS4446 Ø

TMC FORM 108-A

REPROVEL NO. 440H 23845