


REQ. PER UNIT	USED ON			MS4515	Ø
	MODEL	ASS'Y. NO.	DATE		
2	TSTE-10K		4-19-65		

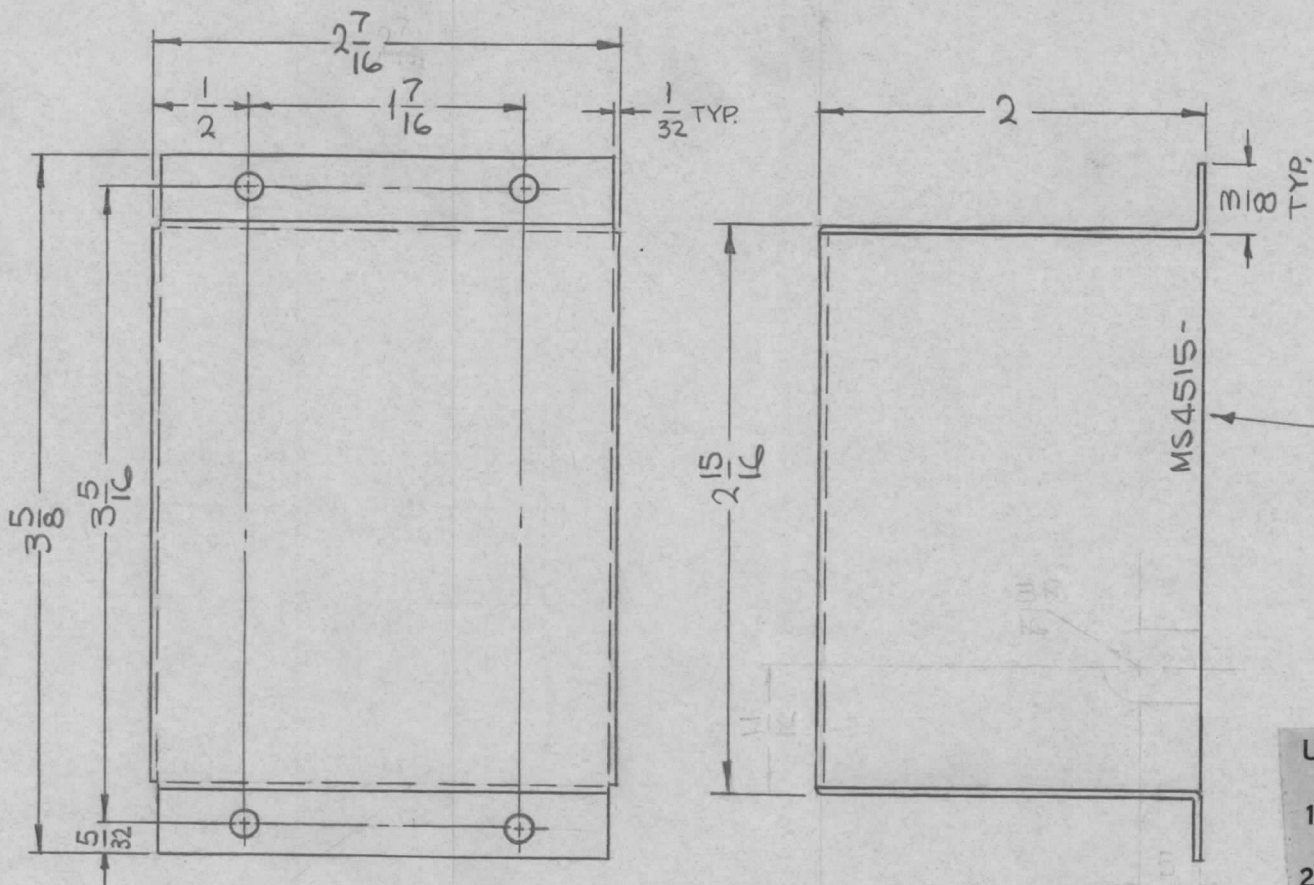

HOLES:  
9/64 DIA. (4 REQ.)

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES

REF.: LD1938  
LD1939

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI DESCRIPTION	SYMBOL	
Ø	ORIG. RELEASE FOR PROD	5-5-67	Ø	R.G.			.064 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	Ø	
X2	MAT WAS. Ø31 THICK	5/10/65	X2	DA	RC	STOCK SIZE		SHIELD, RF			
X1	ON SIDE VIEW SLOT 3/16 x 5/16 DELETED	5-4-65	X1	GDL		ALUMINUM					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							MATERIAL				
SCALE		1:1					5052-H32		SRG		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A			TYPE & TEMPER S404 YEL. IRIDITE		DG	MD	FINAL APPROVAL
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS4515 Ø