


REQ. PER UNIT	USED ON			MS4557 ϕ
	MODEL	ASS'Y. NO.	DATE	
1	TST () 10K		5.7.65	

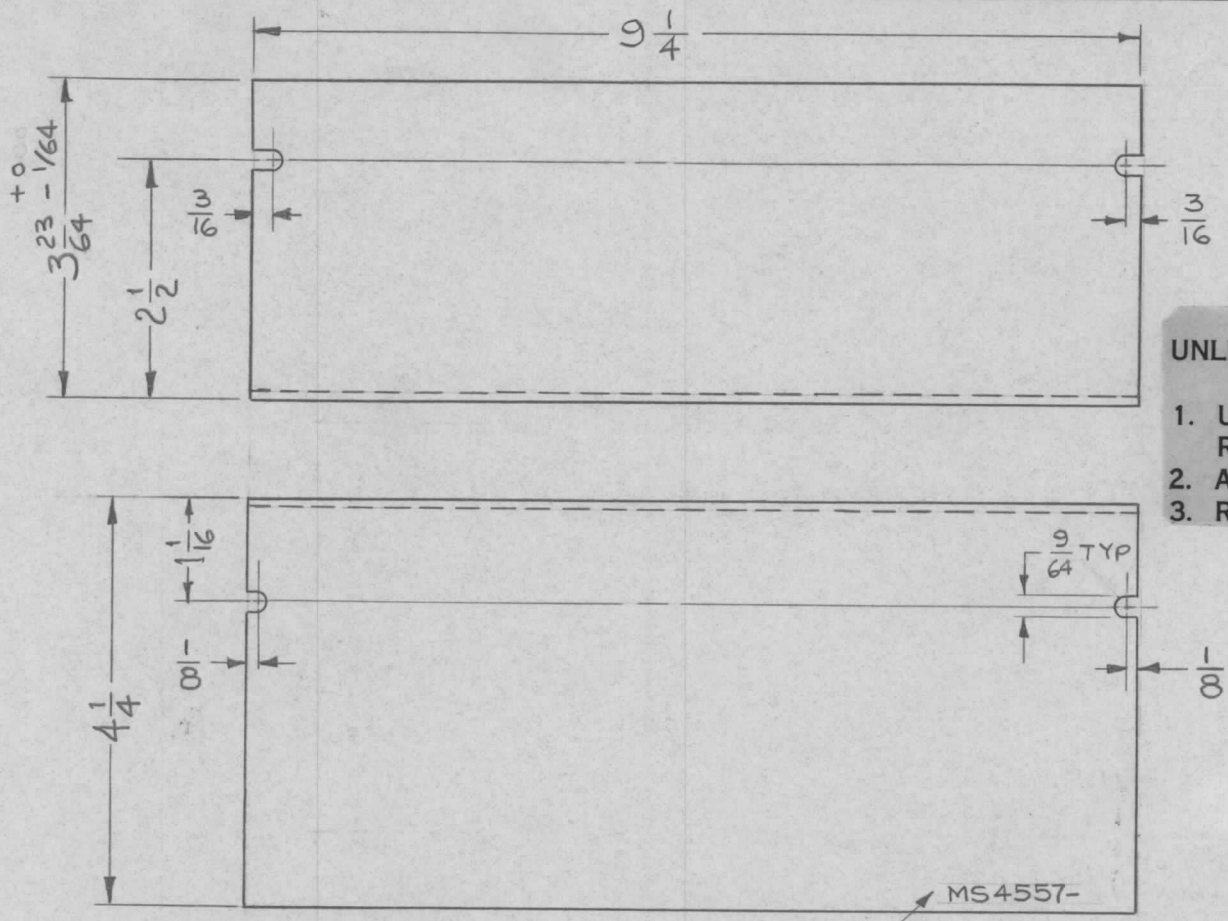

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

MS4557-
 MARK TMC PART NO.
 1/8 HIGH GOTHIC,
 WITH LATEST REV. LETTER

REQ.	ITEM	PART NO.	F. BUDETTI DESCRIPTION			SYMBOL
		.064 THK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK, NEW YORK			
ϕ	ORIGINAL RELEASE	2/15/66	ALUMINUM			COVER, BANDSWITCH, REAR
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:2			
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005	TOLERANCES	FRACTIONS \pm 1/64 ANGLES \pm 0° 30'	CODE A	5052-H32		
		TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED
		S404 YEL. IRIDITE			Job	JCB
		FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	FINAL APPROVAL
						1/1 May
						MS4557 ϕ