


UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	TST ()10K		5.6.65

MS4559 \emptyset

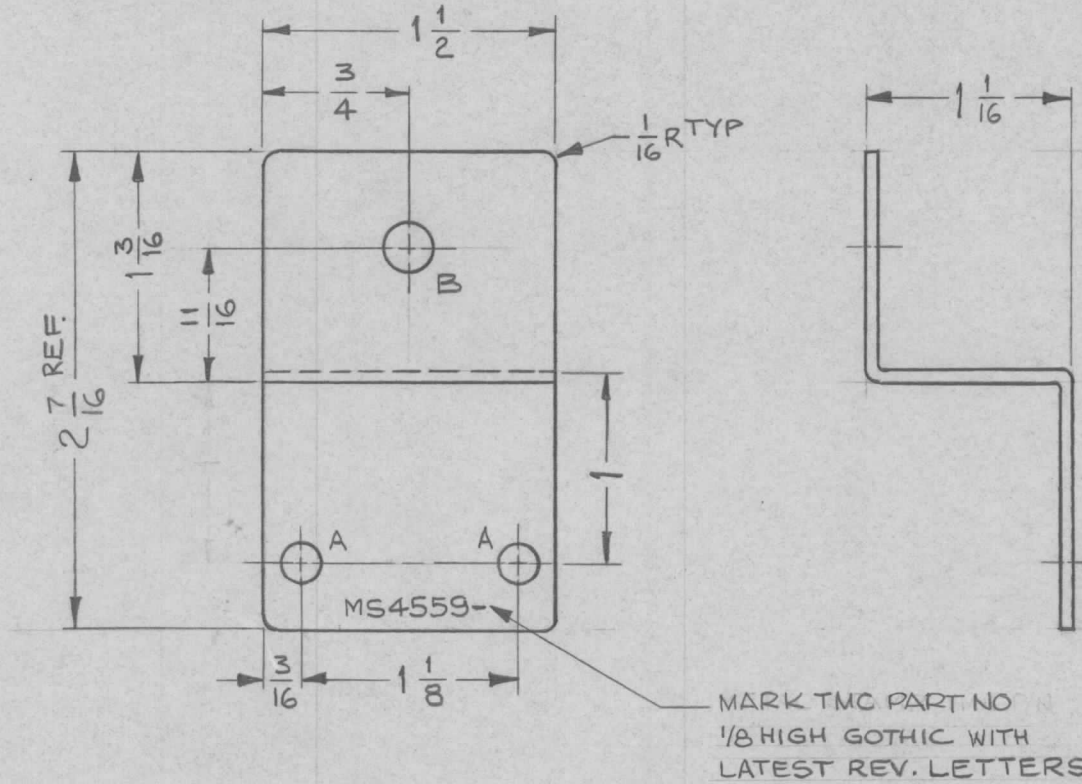

HOLES:	REQ
A ~ 13/64 DIA	2
B ~ 1/4 DIA	1

							REQ. ITEM	PART NO.	F. BUDETTI DESCRIPTION	SYMBOL	
								.064 THK STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK		
								ALUMINUM	BRACKET, MTG., COIL		
								MATERIAL			
								5052-H32	<i>hbs</i>	<i>JCB</i>	<i>1/11/65</i>
								TYPE & TEMPER	DRAWN	CHECKED	FINAL APPROVAL
								S404 YEL. IRIDITE		<i>JCB</i>	MS4559 \emptyset
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005

FRACTIONS
± 1/64
ANGLES
± 0° 30'

TOLERANCES

CODE
A

SCALE
1:1

DATE
2-16-66

CH. NO.
-AA

DRAFTS
Jc

CHECKER

ENG. APP.