


REQ. PER UNIT	USED ON			MS4593 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	RFC-1B	KIT. 187	5-19-65	

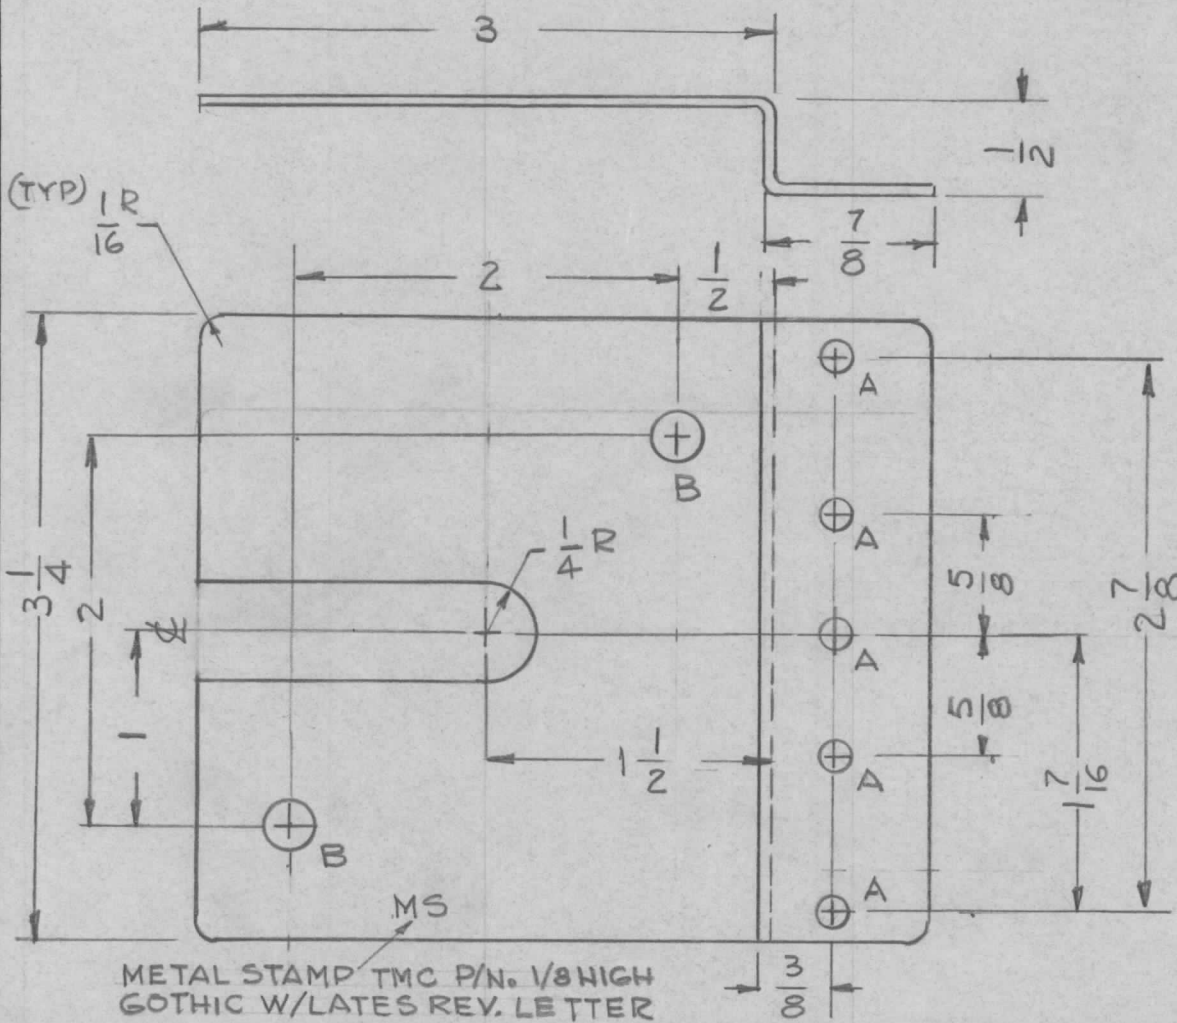

HOLES

A	11/64	5 REQ
B	1/4 DIA	2 REQ.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
	.062 THK.		THE TECHNICAL MATERIEL CORP.	
	STOCK SIZE		MAMARONECK. NEW YORK	
	ALUMINUM		BRACKET, MTG. CAPACITOR	
	MATERIAL			
	5052-H32	G.D.L.	FILE 5/19/65	RB M/May 5/24/65
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
	3404 YEL. IRIDITE	LB		
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS4593 \emptyset