


REQ. PER UNIT	USED ON		MS4594 $\emptyset$
	MODEL	ASS'Y. NO.	
1	TSTE-10K		5-24-65

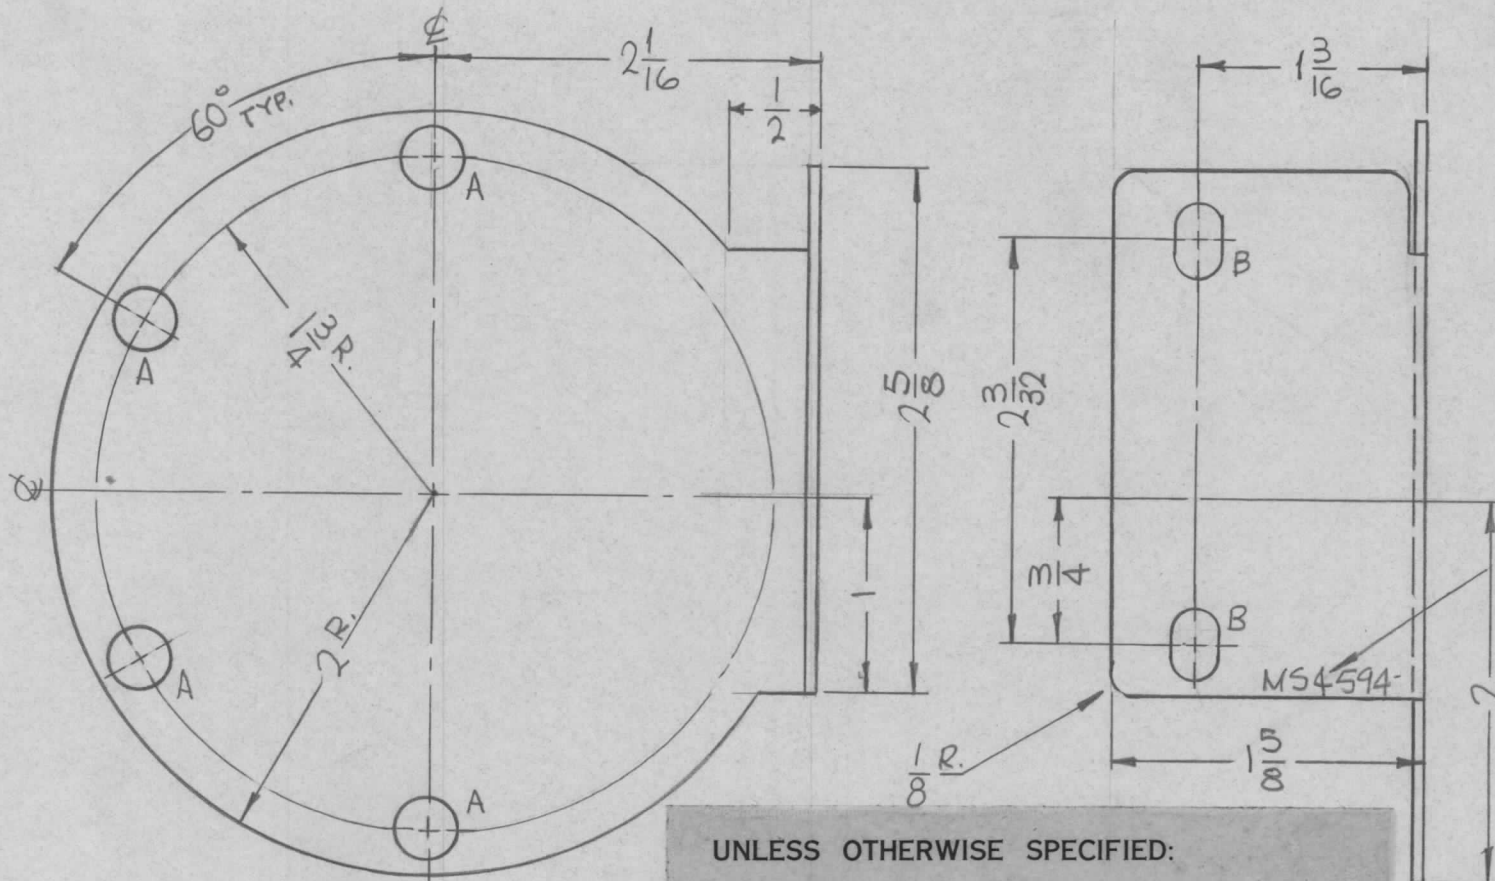

HOLES:  
 A ~ 5/16 DIA. (4REQ.)  
 B ~ 15/64 X 3/8 SLOT (2REQ.)

STAMP TMC PART NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REF.: LD1940

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI DESCRIPTION	SYMBOL		
							.051 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
							STOCK SIZE					
$\emptyset$	ORIGINAL RELEASE	2/15/66					COPPER		BRACKET, CONNECTING			
							MATERIAL					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					HOT ROLLED					
DECIMALS .X $\pm$ .05 .XX $\pm$ .01 .XXX $\pm$ .005	TOLERANCES	FRACTIONS $\pm$ 1/64 ANGLES $\pm$ 0° 30'	CODE A					TYPE & TEMPER S245 SILVER PLATE S423 IRIDITE 18-P SILVER KOTE	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS4594 $\emptyset$	