REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS4596 Ø
1	TST( )10K		5-24-65	

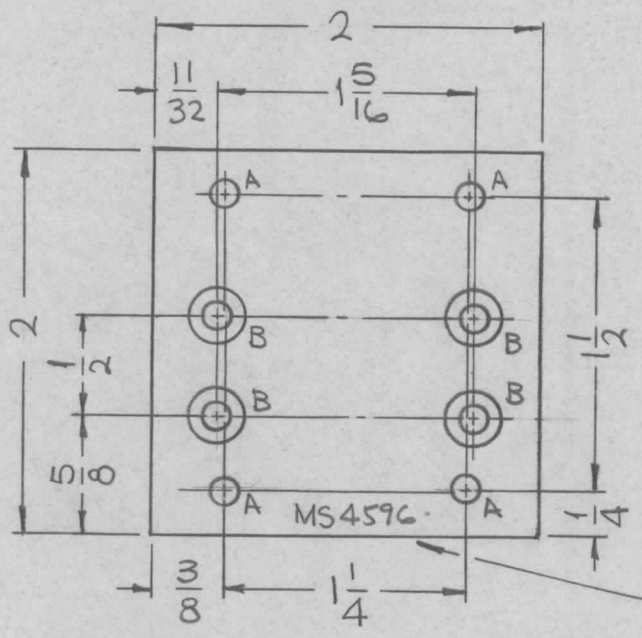

HOLES:
A~ 9/64 DIA. (4 REQ.)
B~ DRILL .144 DIA. C'SINK 82° TO .284 DIA. (4 REQ.)

MARK TMC PART NO.
1/8 HIGH GOTHIC W/LATEST
REV. LETTER.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	2/15/66				

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS
.X ±.05
.XX ± .01
.XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE 1:1

CODE A

REQ.	ITEM	PART NO.
1/8 THICK		
STOCK SIZE		
ALUMINUM		
MATERIAL		
5052-H32		
TYPE & TEMPER	HEAT TREAT. SPEC.	
S404 YEL. IRIDITE		
FINISH & SPEC. NO.		

F. BUDETTI DESCRIPTION SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

PLATE, MTG. RELAY

DRAWN	CHECKED	FINAL APPROVAL
SRG		
ELEC. DES. APP.	MECH. DES. APP.	MS4596 Ø

TMC FORM 108-A