


REQ. PER UNIT	USED ON			MS4599	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TSTE-10K		5-25-65		

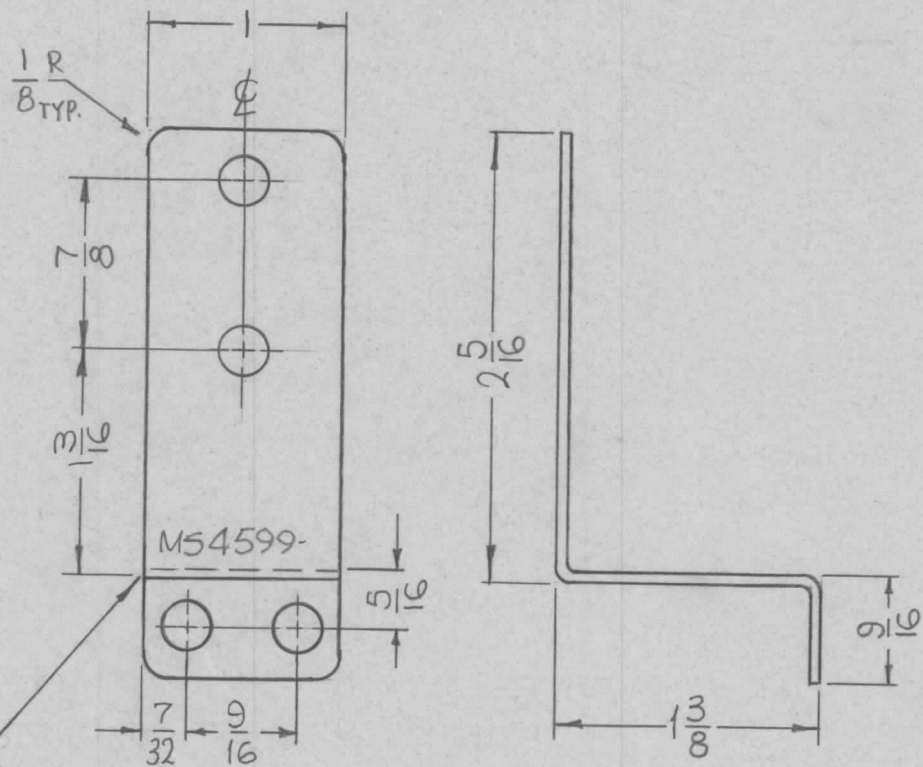

HOLES:
1/4 DIA. (4 REQ.)

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

MARK
TMC PART NO.
1/8 HIGH GOTHIC
W/LATEST REV.
LETTER.

						REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
						.051 THICK		THE TECHNICAL MATERIEL CORP.			
						STOCK SIZE		MAMARONECK, NEW YORK			
						COPPER		STRAP, CONNECTING			
Ø	ORIGINAL RELEASE FOR PRODUCTION	2-16-66	MA	Jc		MATERIAL					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE									
		1:1									
DECIMALS	TOLERANCES	FRACTIONS	CODE								
.X ± .05		± 1/64	A								
.XX ± .01		ANGLES									
.XXX ± .005		± 0° 30'									
		HOT ROLLED		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED	FINAL APPROVAL
		S245 SILVER PLATE						SAB		JCB	
		S423 IRIDITE 18P SILVER-KOTE								1/2 M. Hay	
		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		MS4599		Ø	