


HOLE

A - 3/16 x 3/8 SLOT REQ. 8

REQ. PER UNIT	USED ON			MS4614	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TST(-)10K		6-2-65		

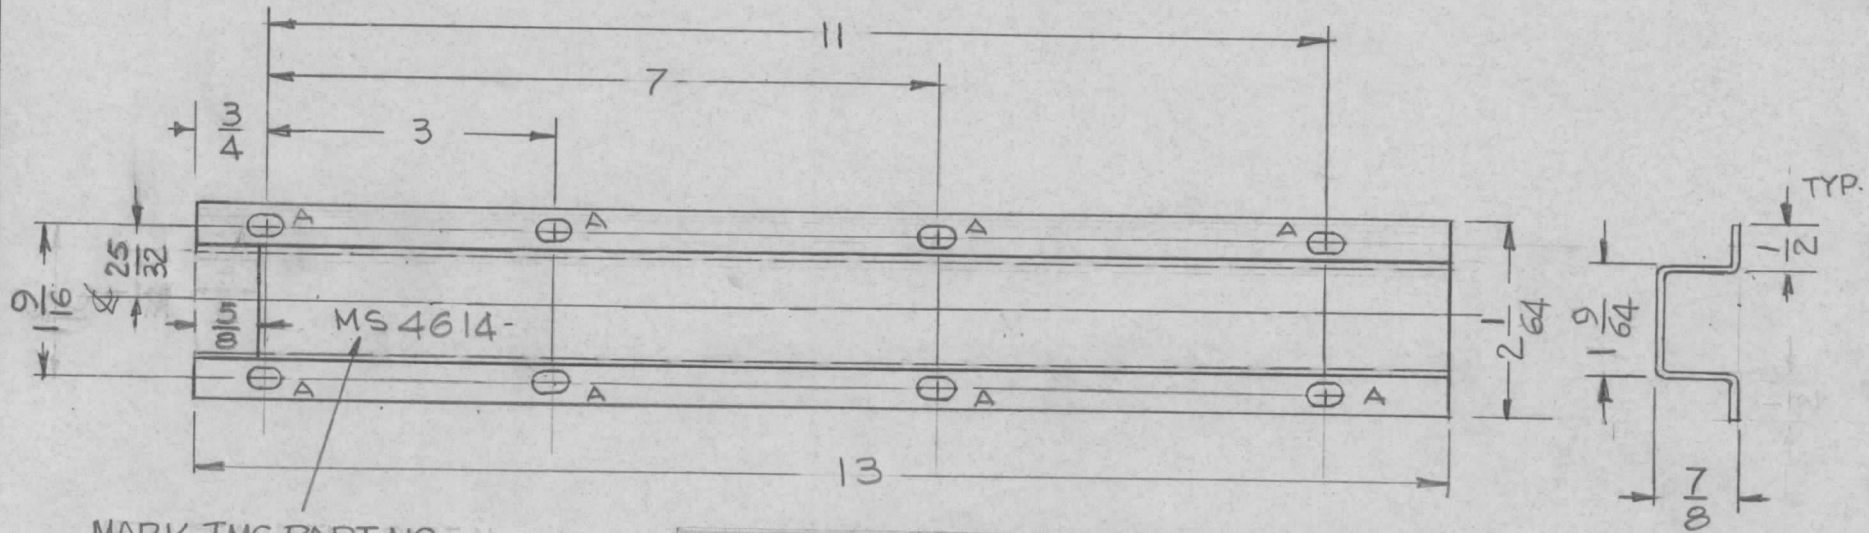

MARK TMC PART NO. No
1/8 HIGH GOTHIC W/LATEST
REV. LETTER

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

							REQ. ITEM	PART NO.	DESCRIPTION	F. BUTTI	SYMBOL
							.064 THK		THE TECHNICAL MATERIEL CORP.		
							STOCK SIZE		MAMARONECK, NEW YORK		
Ø	ORIGINAL RELEASE	2/15/66					ALUMINUM		COVER, CABLE		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:2			5052-H32		G.D.L.	RCB	MS4614
DECIMALS	FRACTIONS	CODE	TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL
.X ± .05	± 1/64	A	S404 YEL. IRIDITE								MS4614
.XX ± .01	ANGLES		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.				Ø
.XXX ± .005	± 0° 30'										