


REQ. PER UNIT	USED ON			MS4616	Ø
	MODEL	ASS'Y. NO.	DATE		
1	GPT200K	AX398	6-9-65		

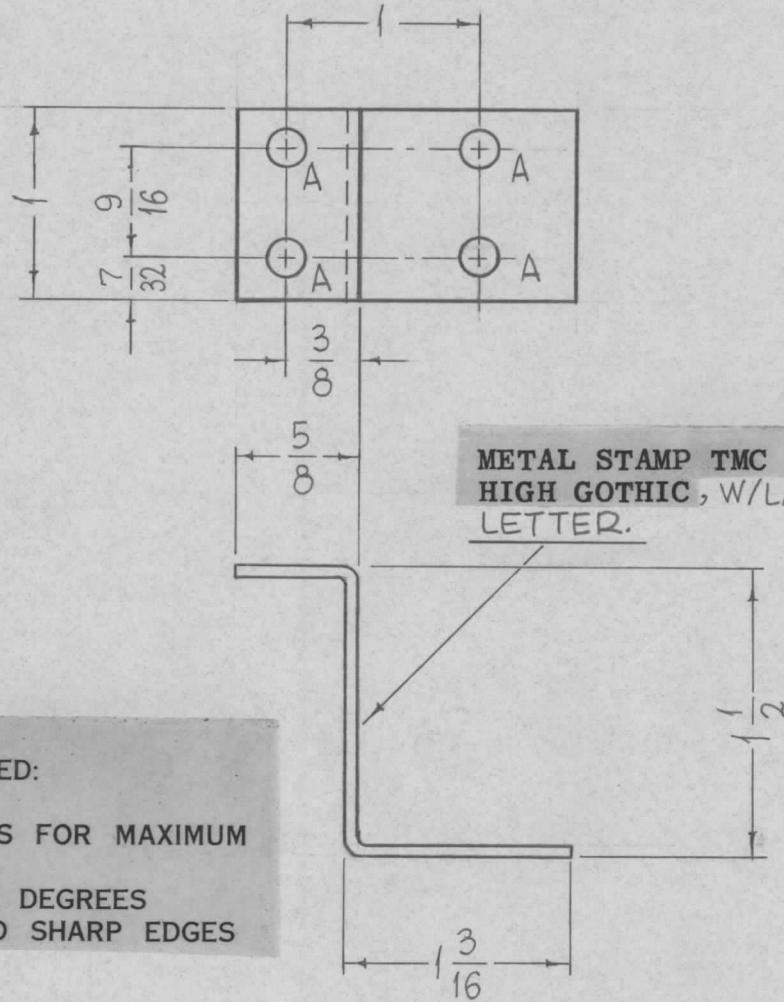

HOLES REQ.  
A-13/64 DIA. 4

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	BUDETTI	DESCRIPTION	SYMBOL
Ø	ORIG. PROD. RELEASE	10/28/65					.064 THICK STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X	EXPER. RELEASE	6-9-65	#	JC			ALUMINUM		BRACKET, INSULATOR MTG.		
							MATERIAL				
							5052-H32		J.C.	HD	10/25/65
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							5404-IRIDITE, 14-2 AL-COAT				MS4616
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	