
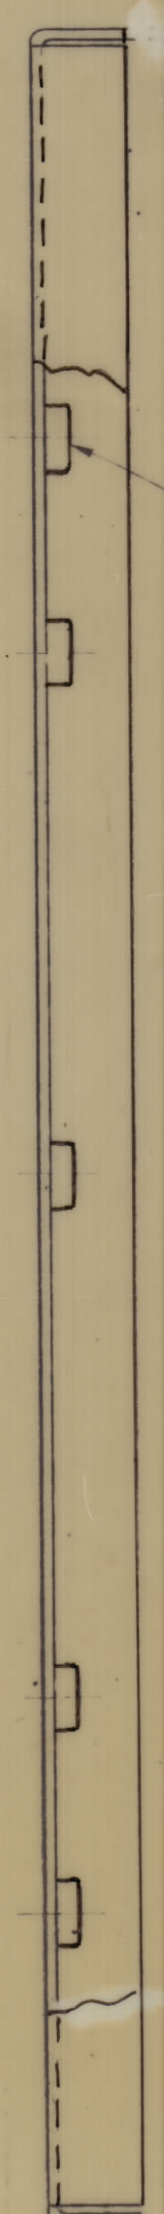
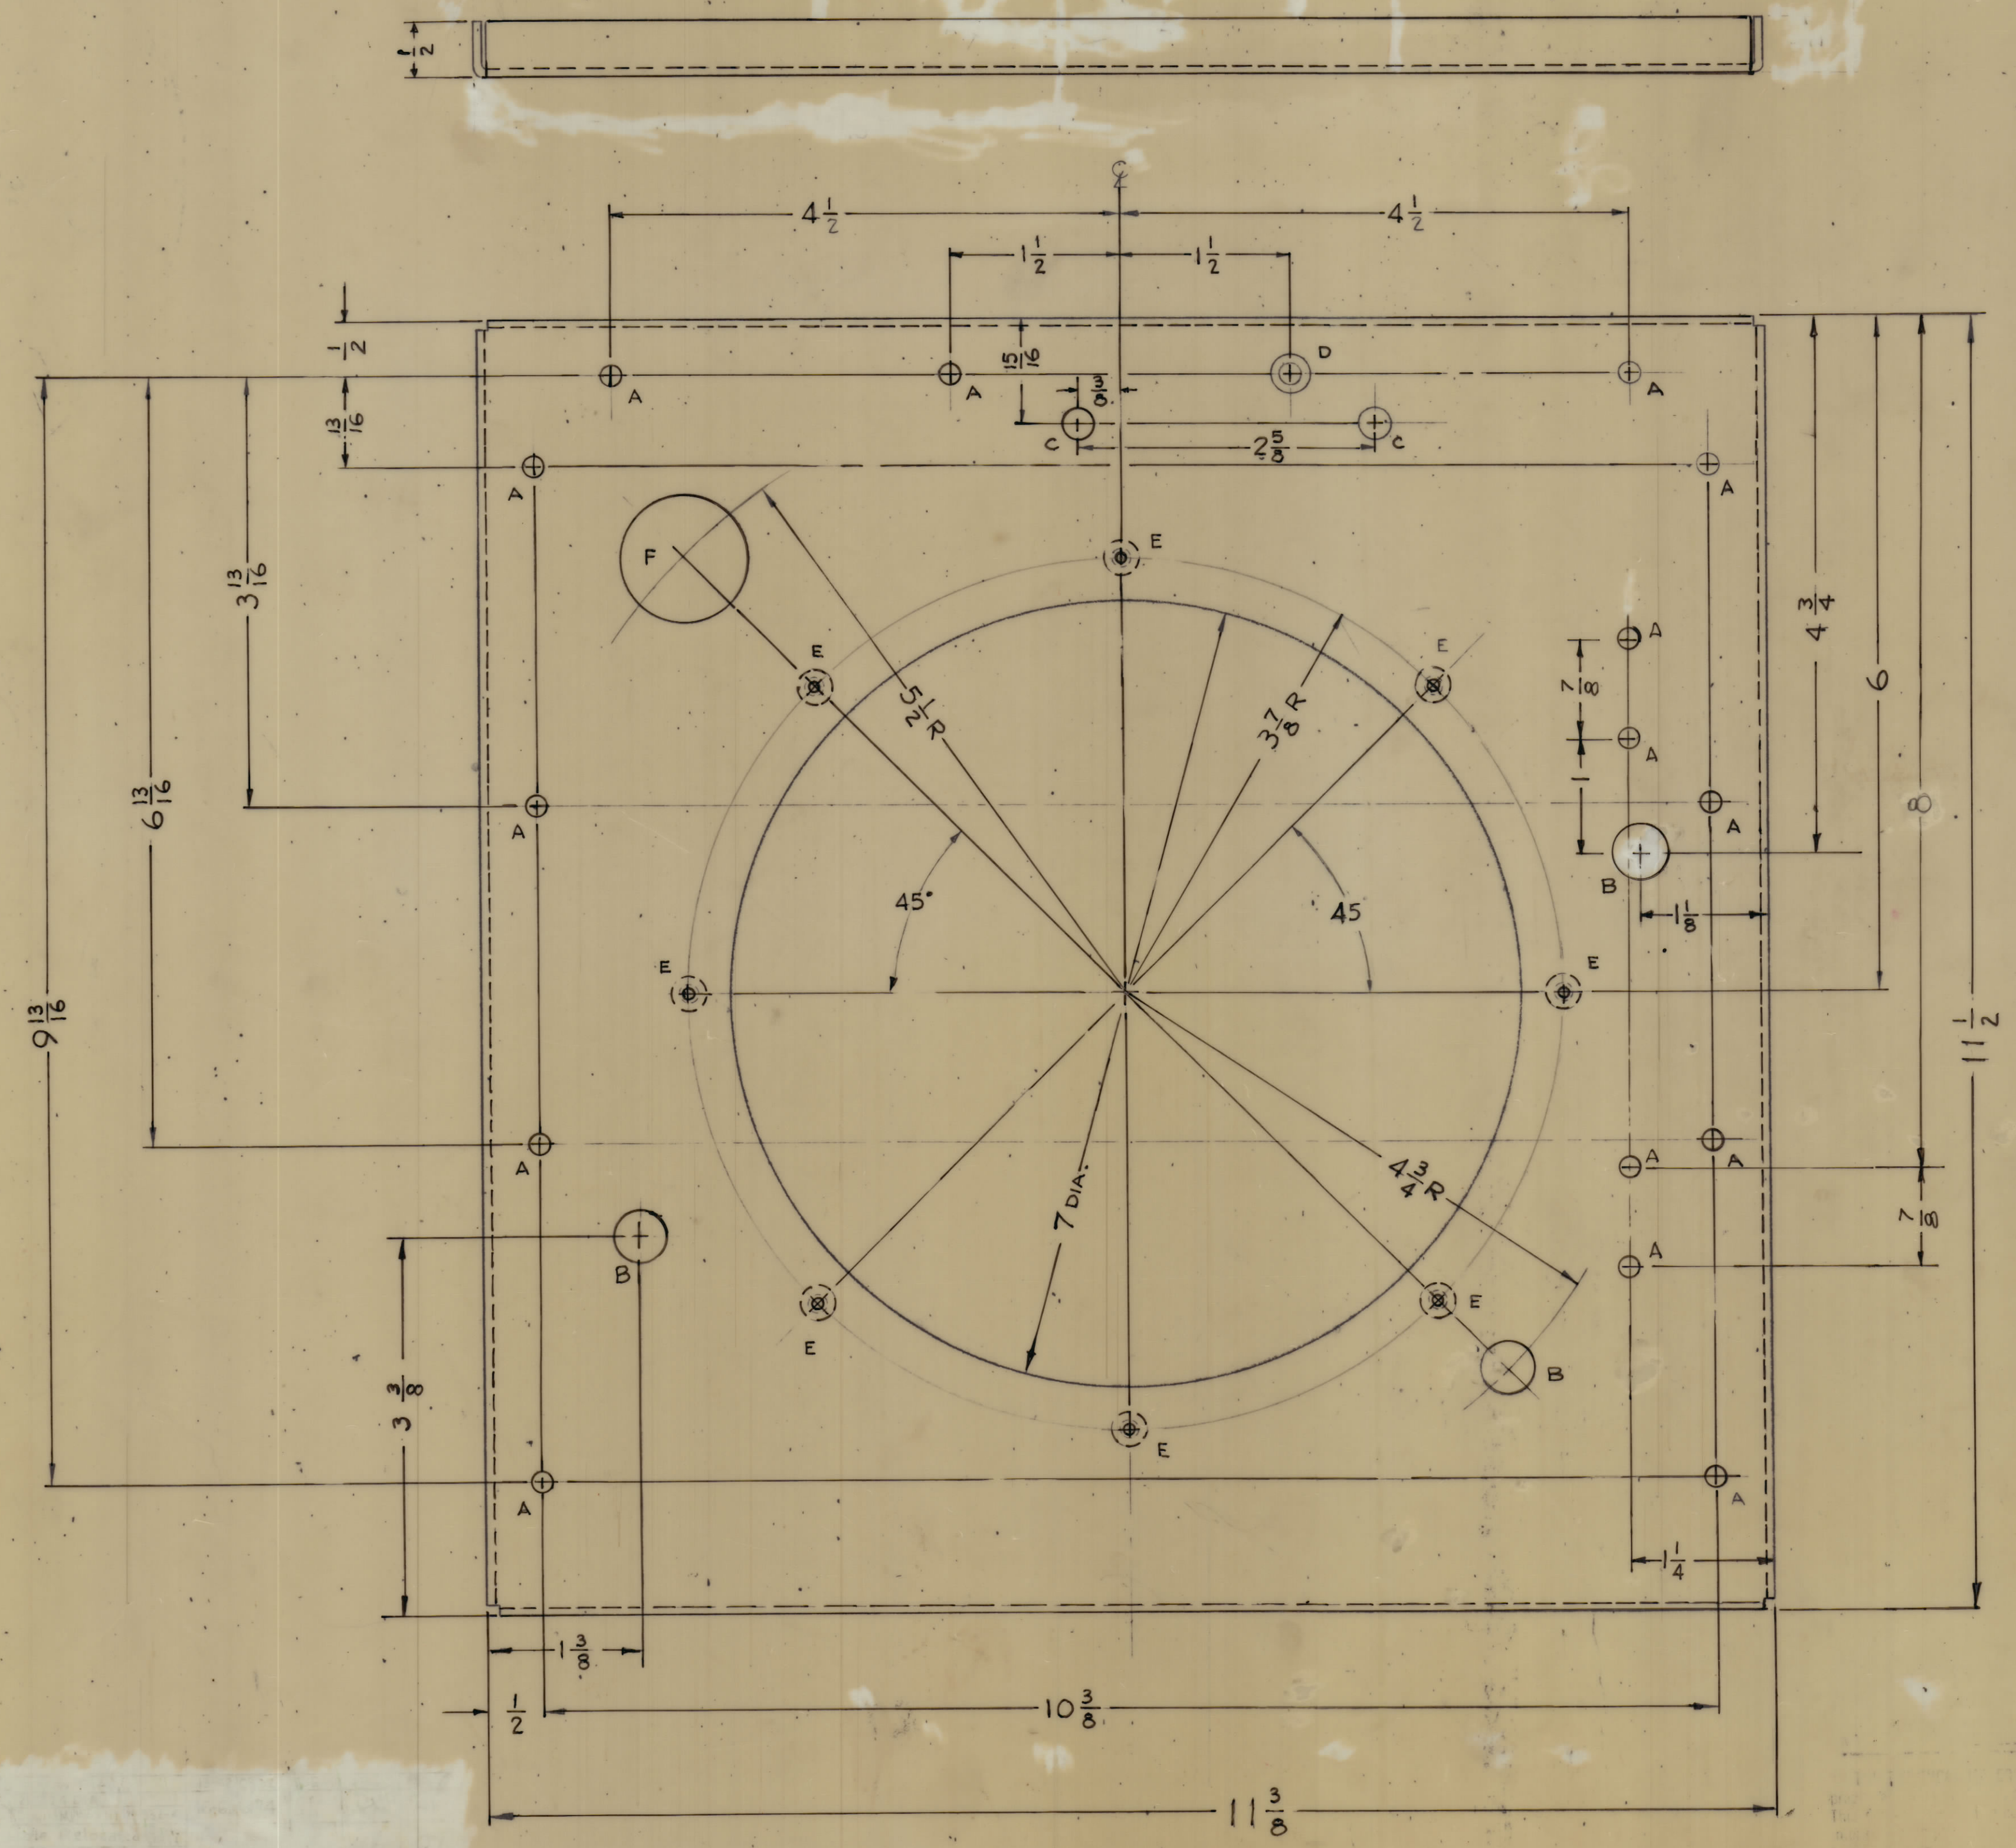


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION.
 REMOVE ALL BURRS AND SHARP EDGES

A - 3/16
 B - 1/2
 C - 9/32
 D - SEE DETAIL
 E - .191-.194 DIA
 F - 1/8 DIA.

15 Req.
 3 Req.
 2 Req.
 1 Req.
 8 Req.
 1 Req.

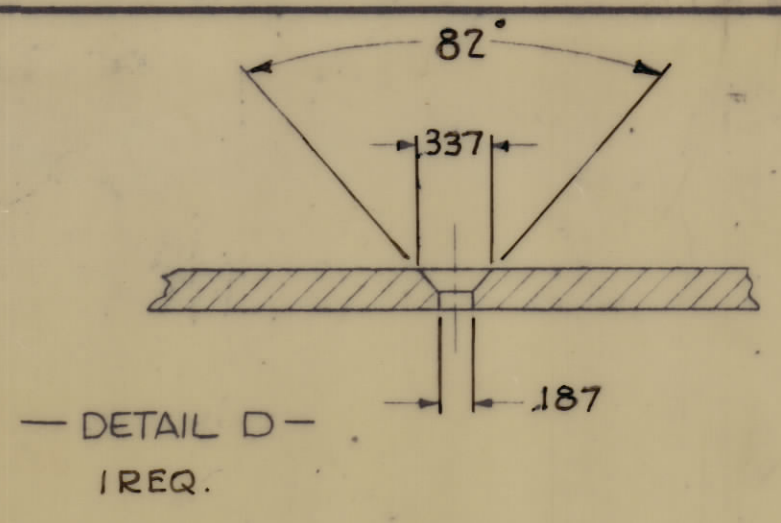

UNLESS OTHERWISE SPECIFIED:
 1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

FINISH NOTE
 S245 SILVER PLATE .0005
 S404 YELLOW IRIDITE

REF LD1932

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
8	1	NT-129-632-4 NUT, PLAIN, SPLINE	E
.064 THK		THE TECHNICAL MATERIEL CORP., MAMARONECK, NEW YORK	
ALUMINUM		COVER, TOP	
5052-H32		WRAP AROUND CHASSIS	
G.D.L.		CDL	
SEE NOTE		MS-4621	

ORIGINAL RELEASE FOR PRODUCTION	9/19/60	CV	
ISSUE ITEM	CHANGED FROM	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
TOLERANCES			
SCALE: 1:1			
ALL OTHERS	DEC. DIM. ± 1/16	DRILL PUNCH COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED	

DESIGNER	MODEL	PROJECT NO.	ASSY. NO.	DATE
TSTE IOK				6-8-60
REQ. PER UNIT	USED ON			

MS4621