
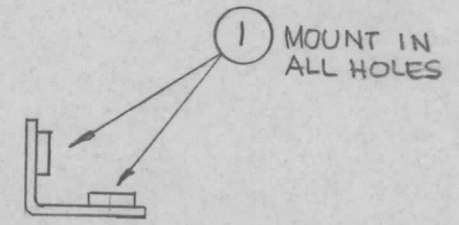


REQ. PER UNIT	USED ON			MS4625 $\emptyset$
	MODEL	ASS'Y. NO.	DATE	
2	TST-10K		5-28-65	

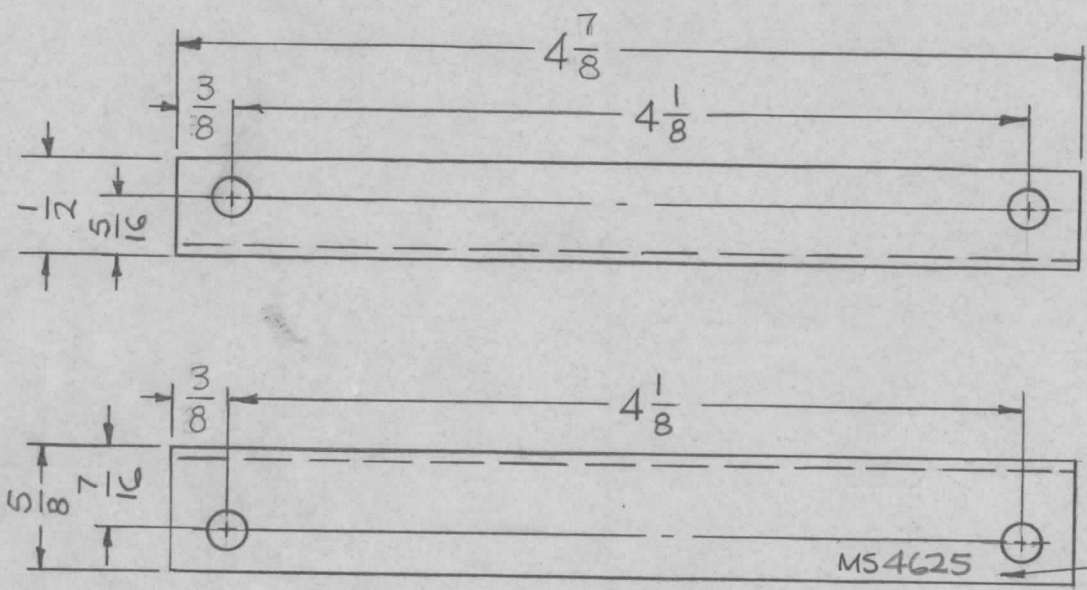

HOLES;  
 .191 -.194 DIA. (4REQ)

MARK TMC PART NO.  
 1/8 HIGH GOTHIC W/LATEST  
 REV. LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

FINISH NOTE:  
 COPPER FLASH  
 S245 SILVER PLATE  
 S423 IRIDITE 18-P SILVER KOTE

$\emptyset$	ORIGINAL RELEASE	2/15/66	$\emptyset$					
X.	S423 ADDED	7-1-65	X1	<i>shg</i>	<i>ae</i>			<i>hde</i>
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1				
DECIMALS	FRACTIONS	CODE						
.X $\pm$ .05	$\pm$ 1/64	A						
.XX $\pm$ .01	ANGLES							
.XXX $\pm$ .005	$\pm$ 0° 30'							

4	1	NT129-632-4	NUT, PLAIN, SPLINE		
REQ. ITEM	PART NO.		F. BUDETTI	DESCRIPTION	SYMBOL
.064 THICK			THE TECHNICAL MATERIEL CORP.		
STOCK SIZE			MAMARONECK, NEW YORK		
ALUMINUM			BRACKET, MTG BLOWER		
MATERIAL					
5052-H32		<i>shg</i>	<i>JCB</i>	<i>1/1/66</i>	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
SEE NOTE			<i>aa</i>	<i>MS4625 <math>\emptyset</math></i>	
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		