


REQ. PER UNIT	USED ON			MS4720	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TST-10K		8-3-65		

HOLES:

A ~ .191-.194 DIA. — 2REQ.
 B ~ 3/16 x 3/8 SLOT — 2REQ.

MARK TMC PART NO.
 1/8 HIGH GOTHIC
 W/LATEST REV. LETTER.

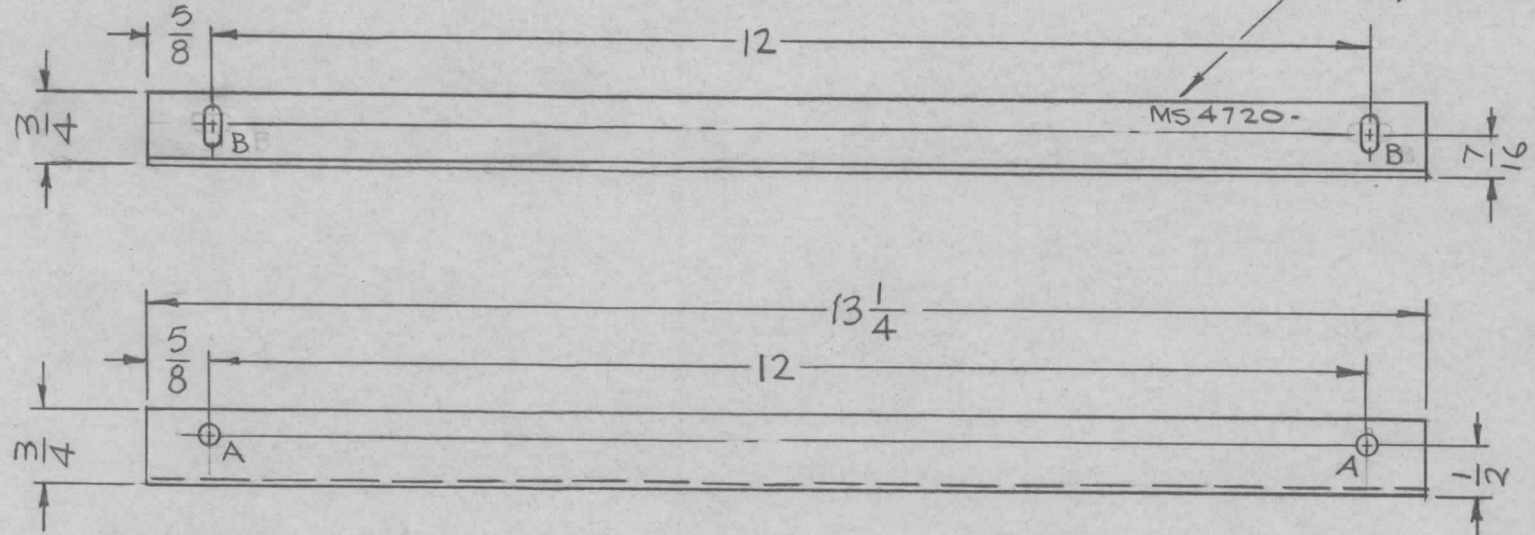

- UNLESS OTHERWISE SPECIFIED:**
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

						2	1	NT129-632-4	NUT, PLAIN, SPLINE	A
						REQ. ITEM		PART NO.	F. BUDETTI DESCRIPTION	SYMBOL
Ø	ORIGINAL RELEASE	3/15/66						.064 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X1	DIRECTION OF SLOTS CHANGED	8-13-65	X1					STOCK SIZE		BRACKET, MTG. SHIELD
								ALUMINUM		
								MATERIAL		
								5052-H32		
								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN
								5404 YEL IRIDITE		CHECKED
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
										FINAL APPROVAL
										MS4720 Ø