


TMC P/N	DESCRIPTION
MS -1	AS SHOWN
MS -2	OPPOSITE HAND

REQ. PER UNIT	USED ON			MS 4812	A
	MODEL	ASS'Y. NO.	DATE		
1	HVRC-2				

MARK TMC PT. NO. W/ LATEST REV. LETTER

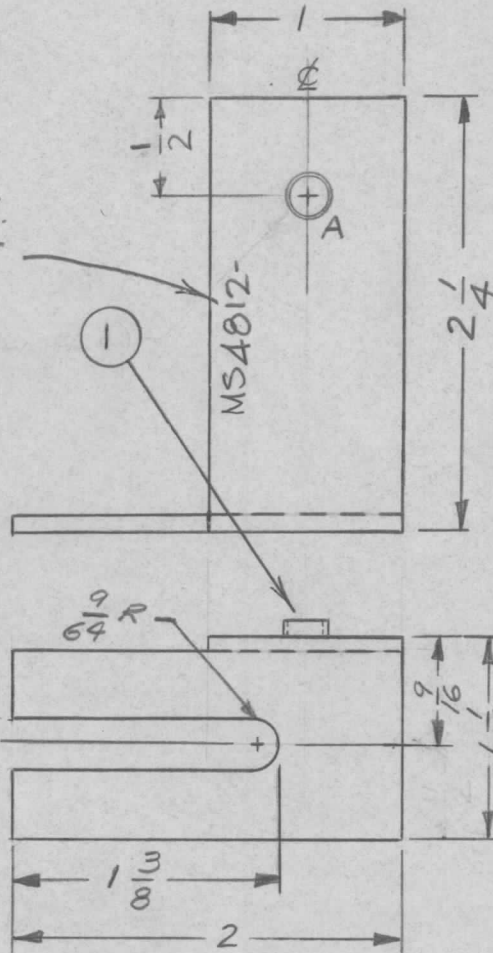

HOLE REQ
A.221-.224 DIA. 1

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	1	NT129832-4	NUT, PLN SPLINE	
.081 THK			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
STOCK SIZE				
ALUMINUM			BRACKET, MTG. BD.	
MATERIAL				
50-52 H32			DAVID V VENEZIAN 11-18-65	
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED
5404 IRIDITE, 14-2				
AL-COAT				
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	CLERICAL CHANGE	12/1/65	CC.	D.V.V.	JCS	MM
Ø	ORIGINAL RELEASE FOR PRODUCTION	11/19/65	Ø	D.V.V.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE DO NOT SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE			

MS 4812 A