REQ. PER UNIT	USED ON			MS4828	Ø
	MODEL	ASS'Y. NO.	DATE		
2	GPT-10KLF		12-1-65		

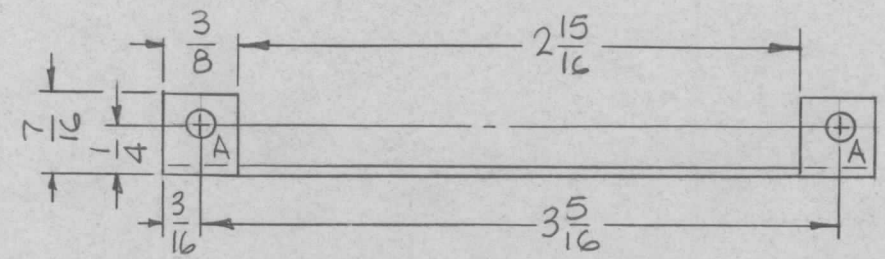

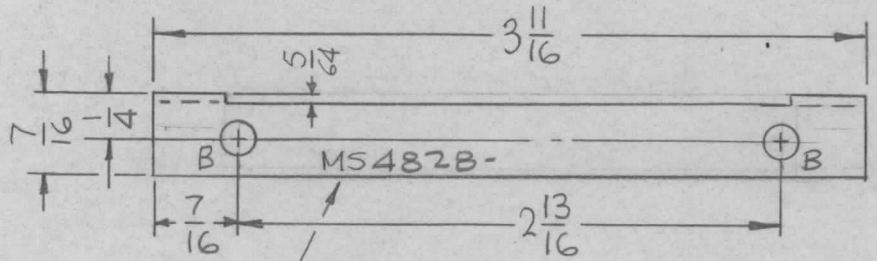

METAL STAMP TMC P/N
1/8 HIGH GOTHIC W/LATEST
REV. LETTER.

HOLES:
A ~ .161-.164 DIA. (2 REQ.)
B ~ .191-.194 DIA. (2 REQ.)

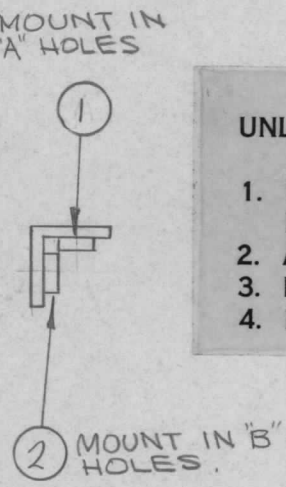

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
2	2	NT129-632-4	NUT, PLAIN, SPLINE	B
2	1	NT129-4-40-4	NUT, PLAIN, SPLINE	A

F. BUDETTI

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	12/8/65				

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ±.05, .XX ± .01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

.064 — STOCK SIZE

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

BRACKET, MTG. RESISTOR BOARD

ALUMINUM — MATERIAL

5052-H32 — TYPE & TEMPER

S404 YEL. IRIDITE — FINISH & SPEC. NO.

HEAT TREAT. SPEC.

DRAWN | CHECKED | FINAL APPROVAL

ELEC. DES. APP. | MECH. DES. APP.

MS4828 Ø