MS4842 B

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X_1	I.T. 1 & 2 ADDED	4-5-66	X_1	LHW		
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/8/66	Ø			
A	6-9/16 W/6-5/8, 11/32 W/ 5/16, 17/32 W/ 1/2 (2 PLACES)	6.2066	16418	LHW		
B	1-LSCA-1 & 2-LRCA-2 ADDED	10-11-66	—			

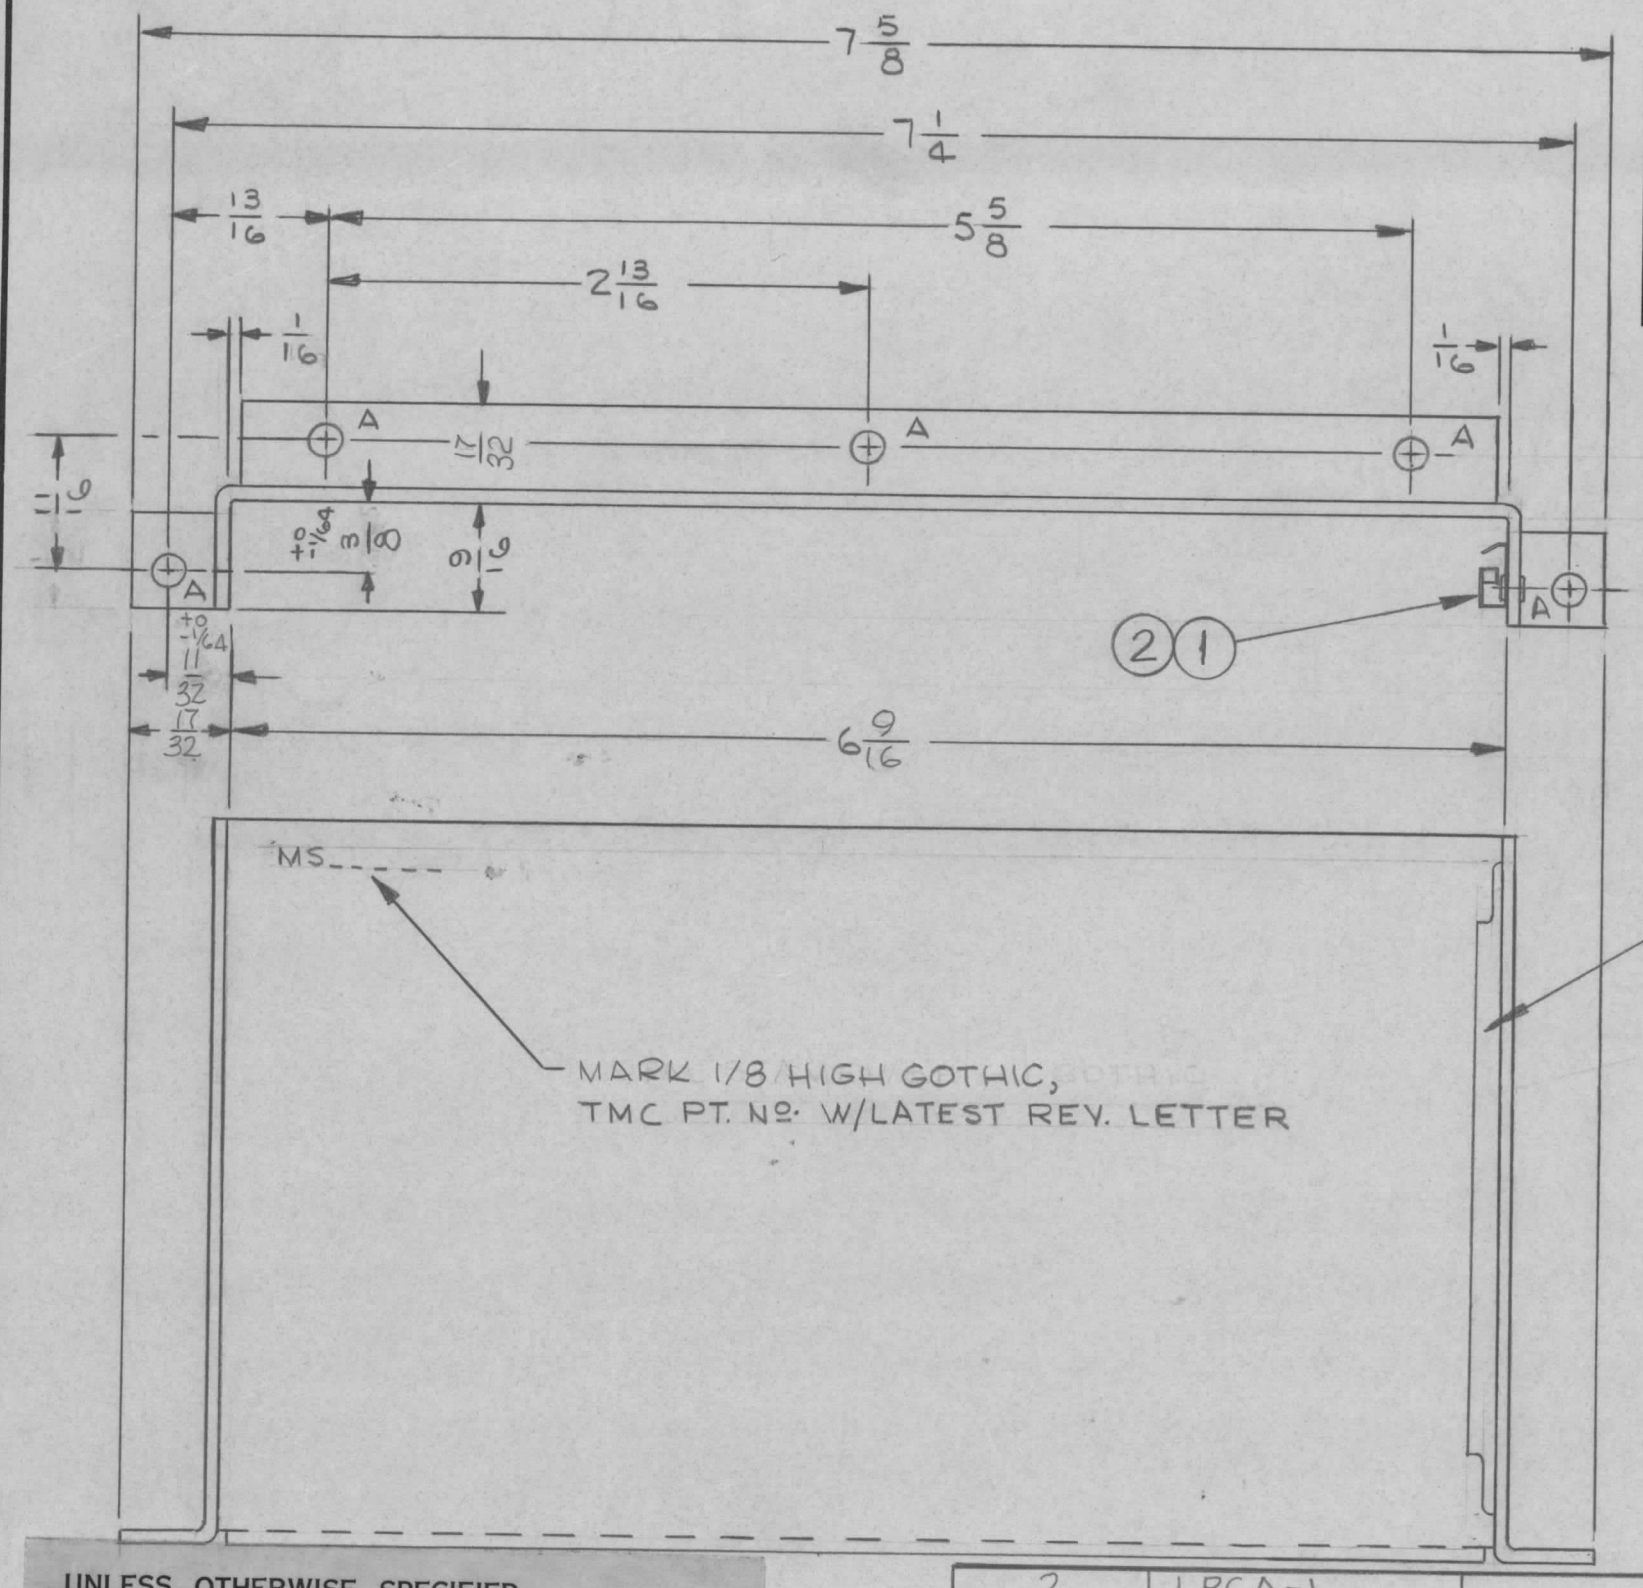

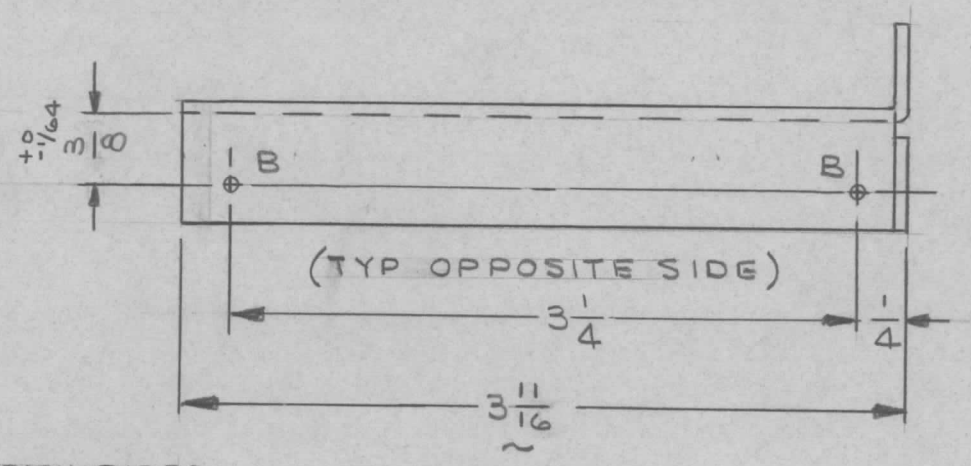

HOLE LEGEND

HOLE	DESCRIPTION	REQ'D
"A"	11/64 DIA	5
"B"	.067 +.003 −.001 DIA	4

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
4	2	EY100-1	EYELET, MTL	
2	1	CU157-1.	RET., P.C. BOARD	

F. E. EATON — LIST OF MATERIAL — SK3229-5

MATERIAL: .064 THK ALUMINUM 5052-H32

FINISH: YELLOW IRIDITE PER S404

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS: .X ± .05; .XX ± .01; .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64; ANGLES ± 0° 30'

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: BRACKET, SUPPORT- P.C. GUIDES

DRAWN J. L.	DATE 11/22/65	FINAL APPROVAL F E Eaton	DATE 4/18/66
CHECKED	DATE 4-11-66		
ELECT. DES.	DATE	MS4842	B
MECH. DES.	DATE 4/11/66	SHEET	REV. LTR.

Q'T'Y./UNIT	MODEL USED ON	ASS'Y. NO.
2	LRCA-1	
1	LSCA-1	
1	RTIH-1	

SCALE 1/1 — CODE

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

NOTES

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

TMC FORM 109