


UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON			MS 4870	A
	MODEL	ASS'Y. NO.	DATE		
1	TDC-7	A5434			

A - $\frac{5}{32} \times \frac{3}{8}$ SLOT 2 REQ

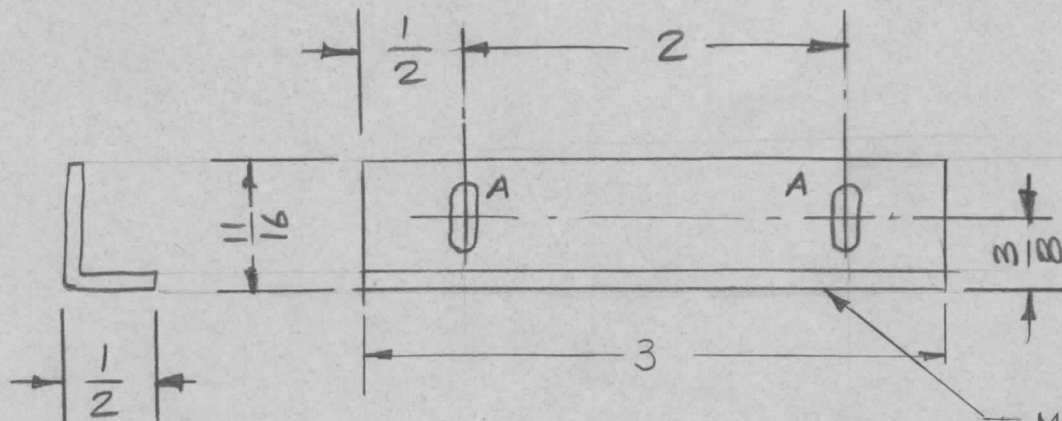

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC, WITH LATEST REVISION LETTER

FINISH NOTE:

1. S109 PASSIVATE

2. SHIF EN G SPINATE IRM

3. SHIF TMC ON 69 ENAM

REQ. ITEM	PART NO.	POSE	DESCRIPTION	SYMBOL									
	16 GA (.063)		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK										
A	DELE. FINISH NOTES 2 & 3	5/2/66	16191	H/A: JCB									
Ø	ORIGINAL RELEASE FOR PRODUCTION	3/28/66	-	H/A									
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		NONE				302			JCB		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE	SEE NOTES						
						A	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS 4870 A			