

MS4874 ϕ


SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X1	1.27/32 WAS 2-7/32, 9-3/4 WAS 10-7/16, 1-11/16 ADD'G	4-29-66	X1	MS4		qq
X2	1-9/16 WAS 1-11/16	6-21-66	X2	MS4		
X3	TMC P/N# DELETED - TITLE WAS COVERED & BOTTOM - "B" HOLES ADDED. PERFORATED AREA DELETED	8-11-66	X3	GDL	ϕ B	ojs
ϕ	ORIGINAL RELEASE FOR PRODUCTION	11-22-66	ϕ	RME		

REVISIONS

HOLES:
 A ~ 1/4 DIA. 6 REQ.
 B ~ 1/2 DIA. 21 REQ.

1 2 TO BE SUPPLIED AND ASSEMBLED BY TMC

MADE TMC PART NO. (MS4874-) 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

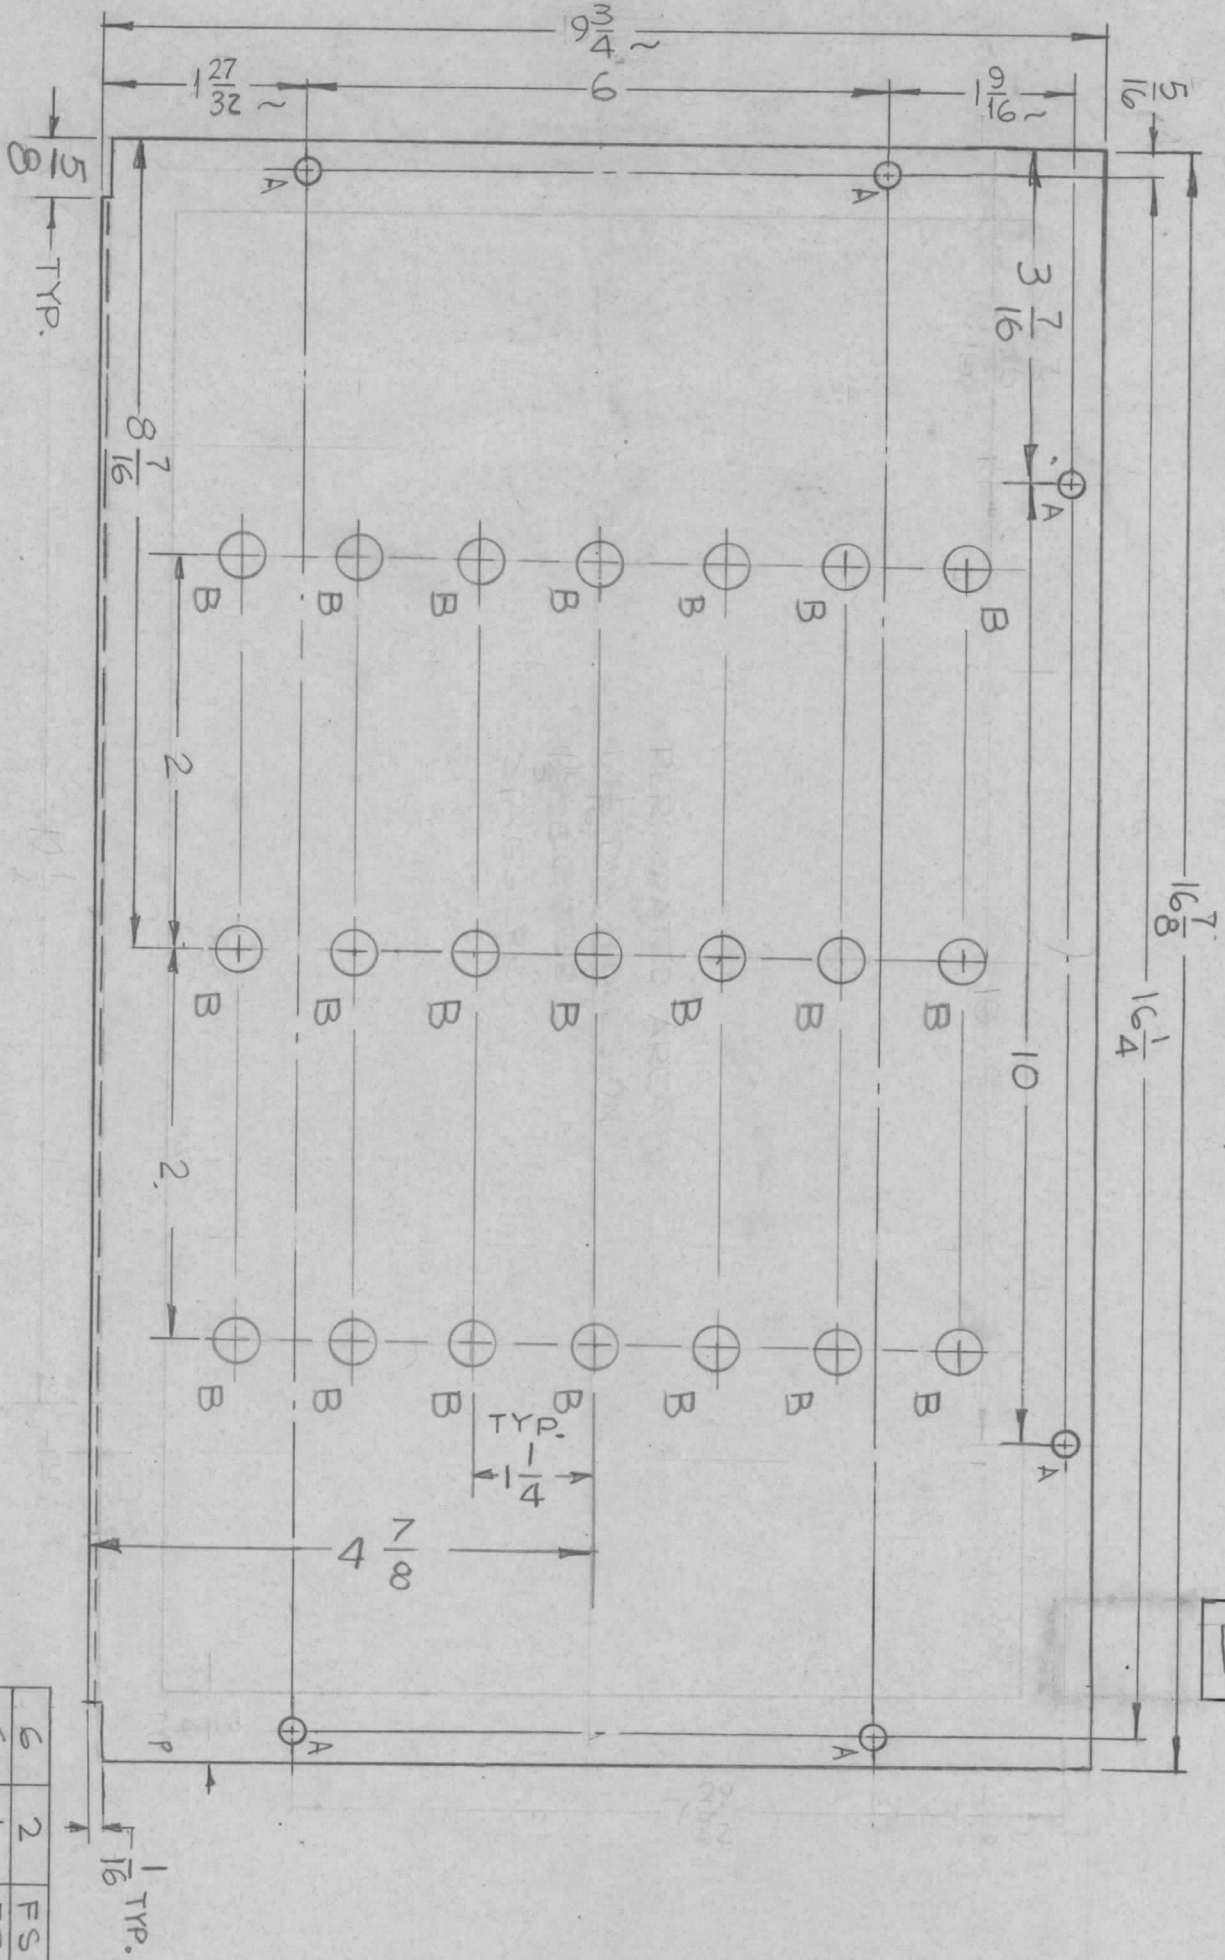

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
6	2	FS109-3	RING, RETAINING	A
6	1	FS110-1	STUD, TURNLOCK	A

LIST OF MATERIAL

MATERIAL
 .051 THICK ALUMINUM
 5052 H32

TITLE
 THE TECHNICAL MATERIEL CORP.
 MAMARONECK, NEW YORK

DECIMALS	TOLERANCES	FRACTIONS	ANGLES
.X ± .05		± 1/64	
.XX ± .01		ANGLES	
.XXX ± .005		± 0° 30'	

QTY./UNIT	1 EA	MODEL USED ON	SWCA-3K	ASSY. NO.	A52264
SCALE	1/2:1	CODE	A		

UNLESS OTHERWISE SPECIFIED:
 1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

DATE	8-19-65	DATE	11-22-66
DATE	11-19-66	DATE	11-22-66
DATE		DATE	

MS4874

REV. LTR.