


HOLE  
A - 1/8" DIA. 3 REQ.

REQ. PER UNIT	USED ON			MS4878 A
	MODEL	ASS'Y. NO.	DATE	
7	STANDARD		12-2-66	

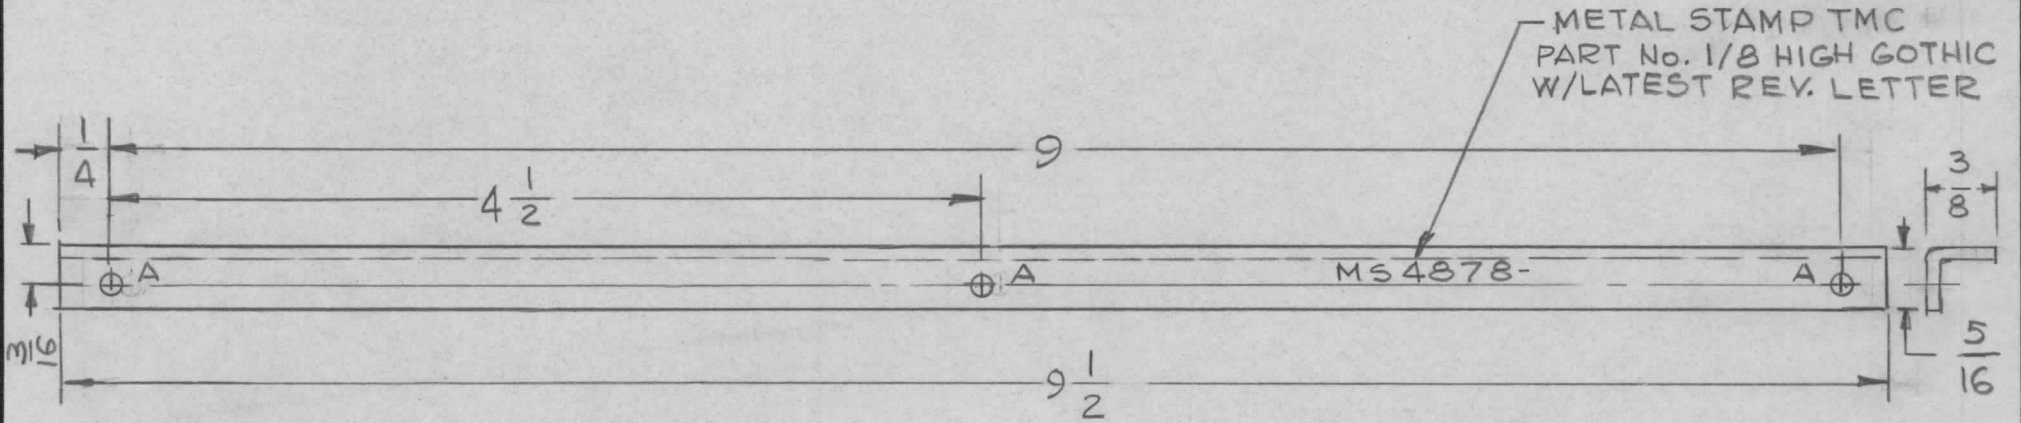

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		.063 THK	THE TECHNICAL MATERIEL CORP.				
		STOCK SIZE	MAMARONECK, NEW YORK				
A	DRWG MADE STANDARD	12/8/66	17412	WTO	JCS		
	ORIGINAL RELEASE	3/3/66					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		1:1			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A				
5052-H32		G.D.L	JCS	A.M.H.			
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL			
S404 YEL IRIDITE			JCS	MS4878 A			
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.				