



| | | | | |
|---------------|-----------|------------|---------|--------------------|
| REQ. PER UNIT | USED ON | | | MS4897 \emptyset |
| | MODEL | ASS'Y. NO. | DATE | |
| 4 | GPT-10KLF | A5450 | 3-17-66 | |

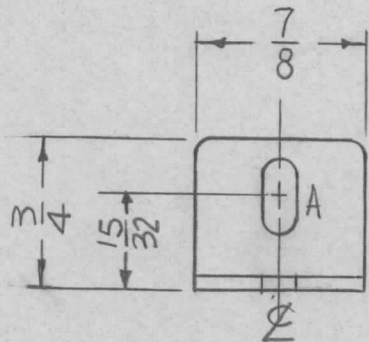

SLOT

A - 3/16 X 3/8 (1 REQ.)

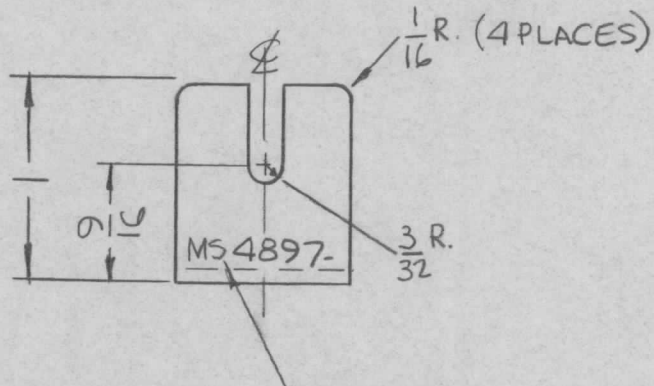

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

MARK TMC P/N
1/8 HIGH GOTHIC
W/LATEST REV.
LETTER.

| REQ. | ITEM | PART NO. | F. BUDETTI DESCRIPTION | | | SYMBOL |
|---|---------------------------------|--------------------|------------------------------|-----------------|-------------------------|--------------------|
| | | .064 THK | THE TECHNICAL MATERIEL CORP. | | | |
| | | STOCK SIZE | MAMARONECK, NEW YORK | | | |
| \emptyset | ORIGINAL RELEASE FOR PRODUCTION | 6/14/66 | \emptyset | CV. | BRACKET, MTG. CAPACITOR | |
| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | | SCALE 1:1 | | | | |
| DECIMALS | TOLERANCES | FRACTIONS | CODE | | | |
| .X \pm .05 | | \pm 1/64 | A | | | |
| .XX \pm .01 | | ANGLES | | | | |
| .XXX \pm .005 | | \pm 0° 30' | | | | |
| | | 5052-H32 | | | | |
| | | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL |
| | | S404 YEL. IRIDITE | | 06-1466 | | MS4897 \emptyset |
| | | FINISH & SPEC. NO. | ELEC. DES. APP. | MECH. DES. APP. | | |