


REQ. PER UNIT	USED ON			MS4908	Ø
	MODEL	ASS'Y. NO.	DATE		
2 EA	AP129	A5361	5-24-66		

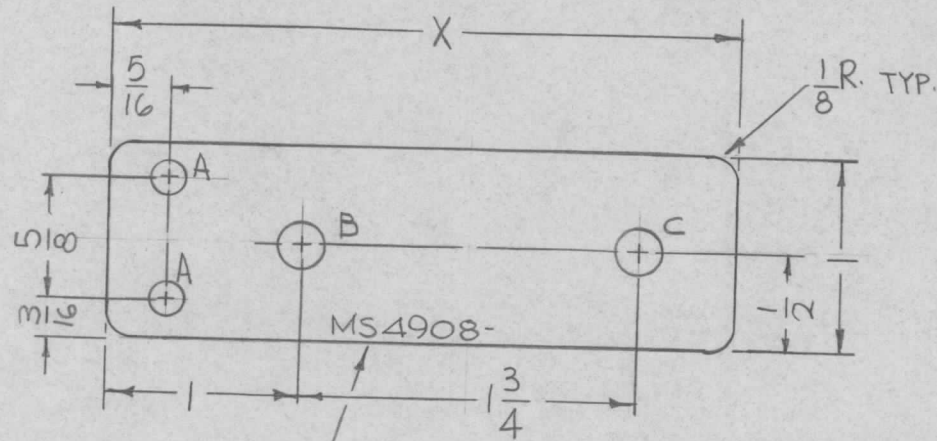

MARK TMC P/N
 $\frac{1}{8}$ " HIGH GOTHIC
W/LATEST REV.
LETTER.

HOLE	DESCRIPTION	REQ.
A	11/64 DIA.	2
B	15/64 DIA.	1
C	SEE CHART	1

TMC P/N	X	C HOLE
MS4908-1	1-1/2	NONE
MS4908-2	3-1/4	15/64D.

Ø ORIGINAL RELEASE FOR PRODUCTION		11-22-66	Ø	RME			REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
X1 REDRAWN, MS4908-2 ADDED		5-24-66	X1	<i>MR</i>	<i>RST</i>		.064 THICK		THE TECHNICAL MATERIEL CORP.		
SYM DESCRIPTION		DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	ALUMINUM		MAMARONECK, NEW YORK		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1				MATERIAL		PLATE, MTG RESISTOR		
DECIMALS X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE	5052-H32		<i>MR</i>	<i>MR</i>	<i>MR</i>
		A					TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN
							S404 YEL. IRIDITE				CHECKED
							FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.
											MS4908 Ø