


REQ. PER UNIT	USED ON			MS4911 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	KMCU-1		4-6-66	

A-11/64 DIA. 2REQ.

MARK TMC PART NO.
1/8 HIGH GOTHIC
W/LATEST REV. LETTER

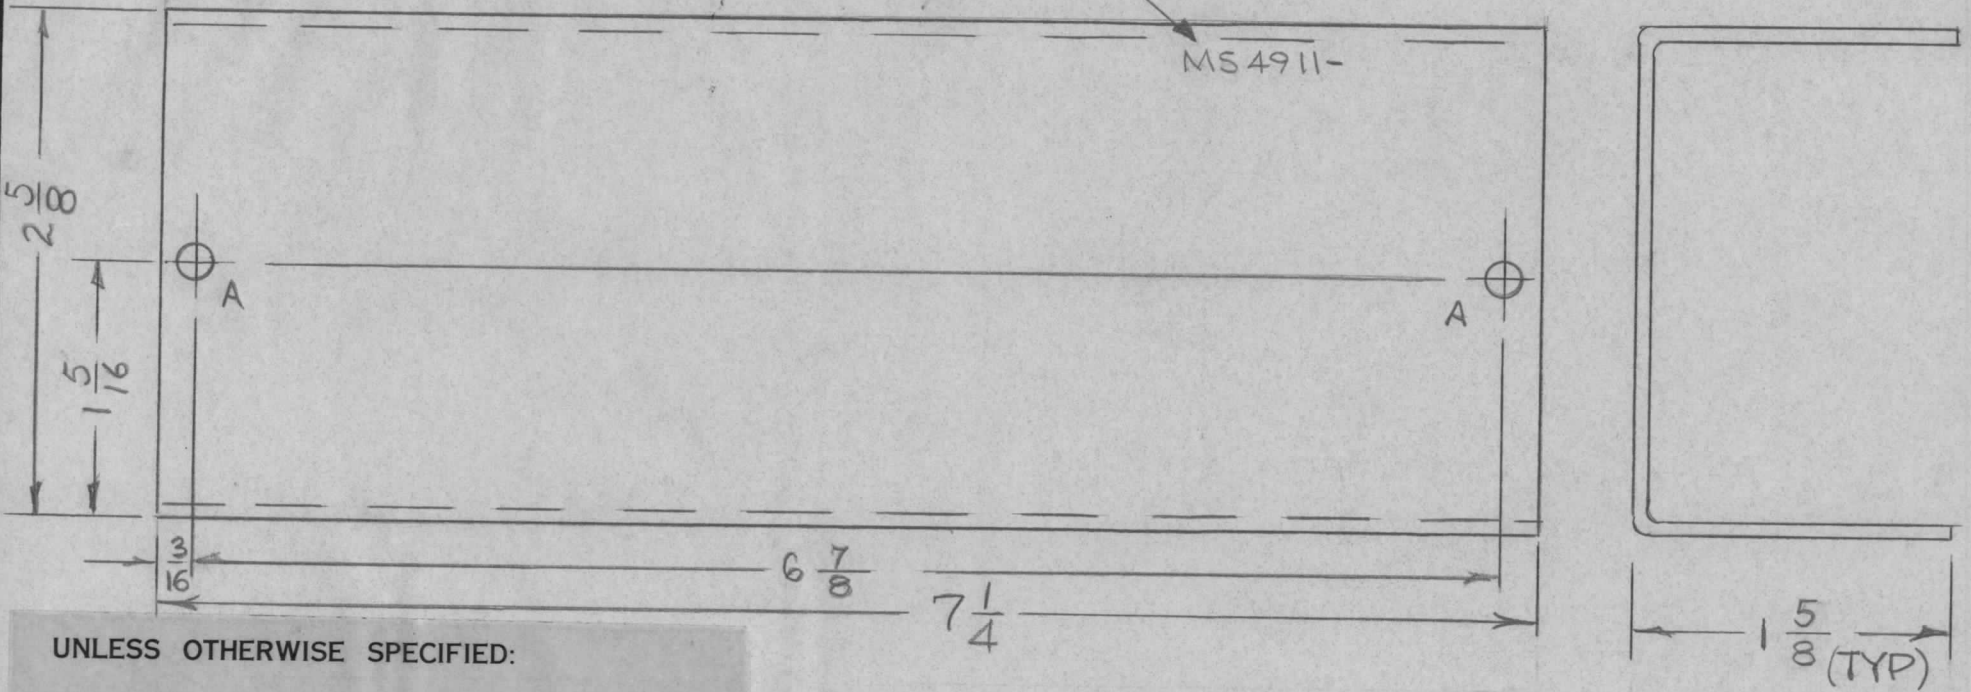

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REF LD2072

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
\emptyset	.063	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X	ALUMINUM	COVER, TERMINAL STRIP	
ISSUE	ITEM	CHANGED FROM	DATE CH. NO. DRAFTS CHECKER ENG. APP.
		ORIGINAL RELEASE FOR PRODUCTION	2.2.67 H WFO
		EXP. RELEASE	1.26.67 X RME
TOLERANCES		SCALE:	
DEC. DIM. \pm	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.		
FRAC. DIM. \pm	REMOVE ALL BURRS AND SHARP EDGES		
ANGULAR DIM. \pm	5052-H32	TYPE & TEMPER	HEAT TREAT. SPEC.
	S404 YEL. IRIDITE	DRAWN	CHECKED
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
			MS4911 \emptyset