
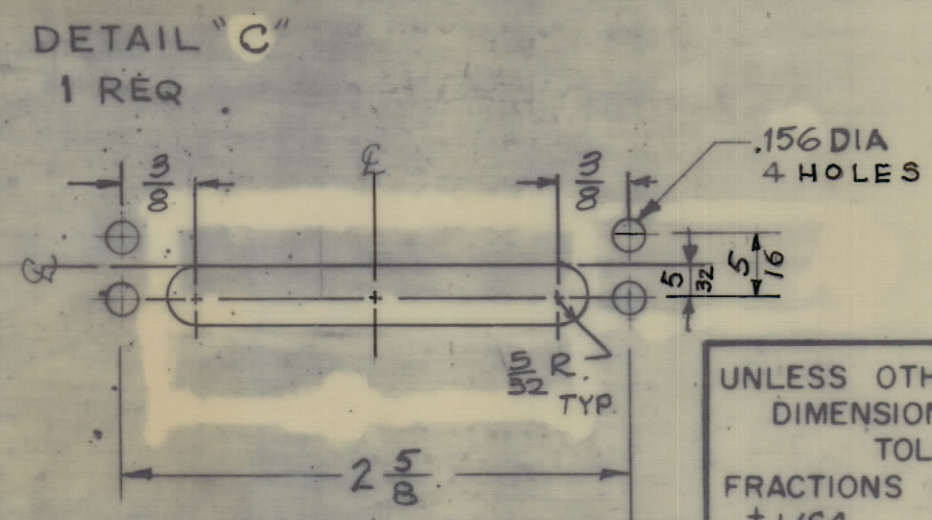
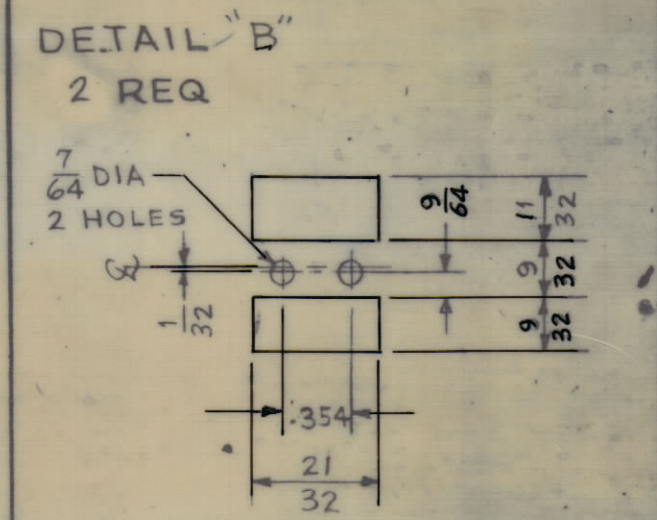
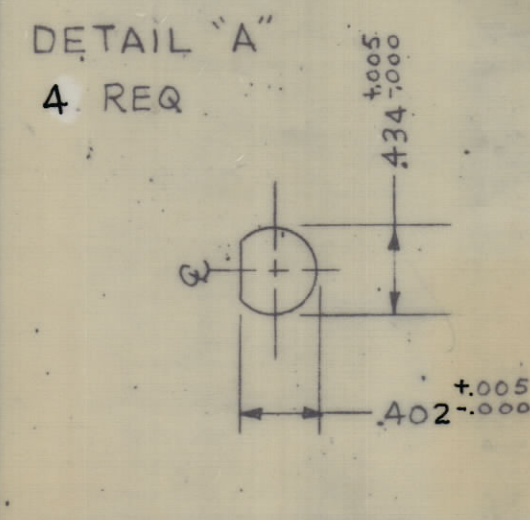


HOLE	DESCRIPTION	REQ.
A	SEE DETAIL	4
B	SEE DETAIL	2
C	SEE DETAIL	1
D	.191-.194 DIA.	7
E	5/32 DIA.	8
F	1/8 DIA.	1
G	11/64 DIA.	4

REVISIONS						
SYM	ZONE	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
Ø		ORIGINAL RELEASE FOR PRO	4/29/66	9		

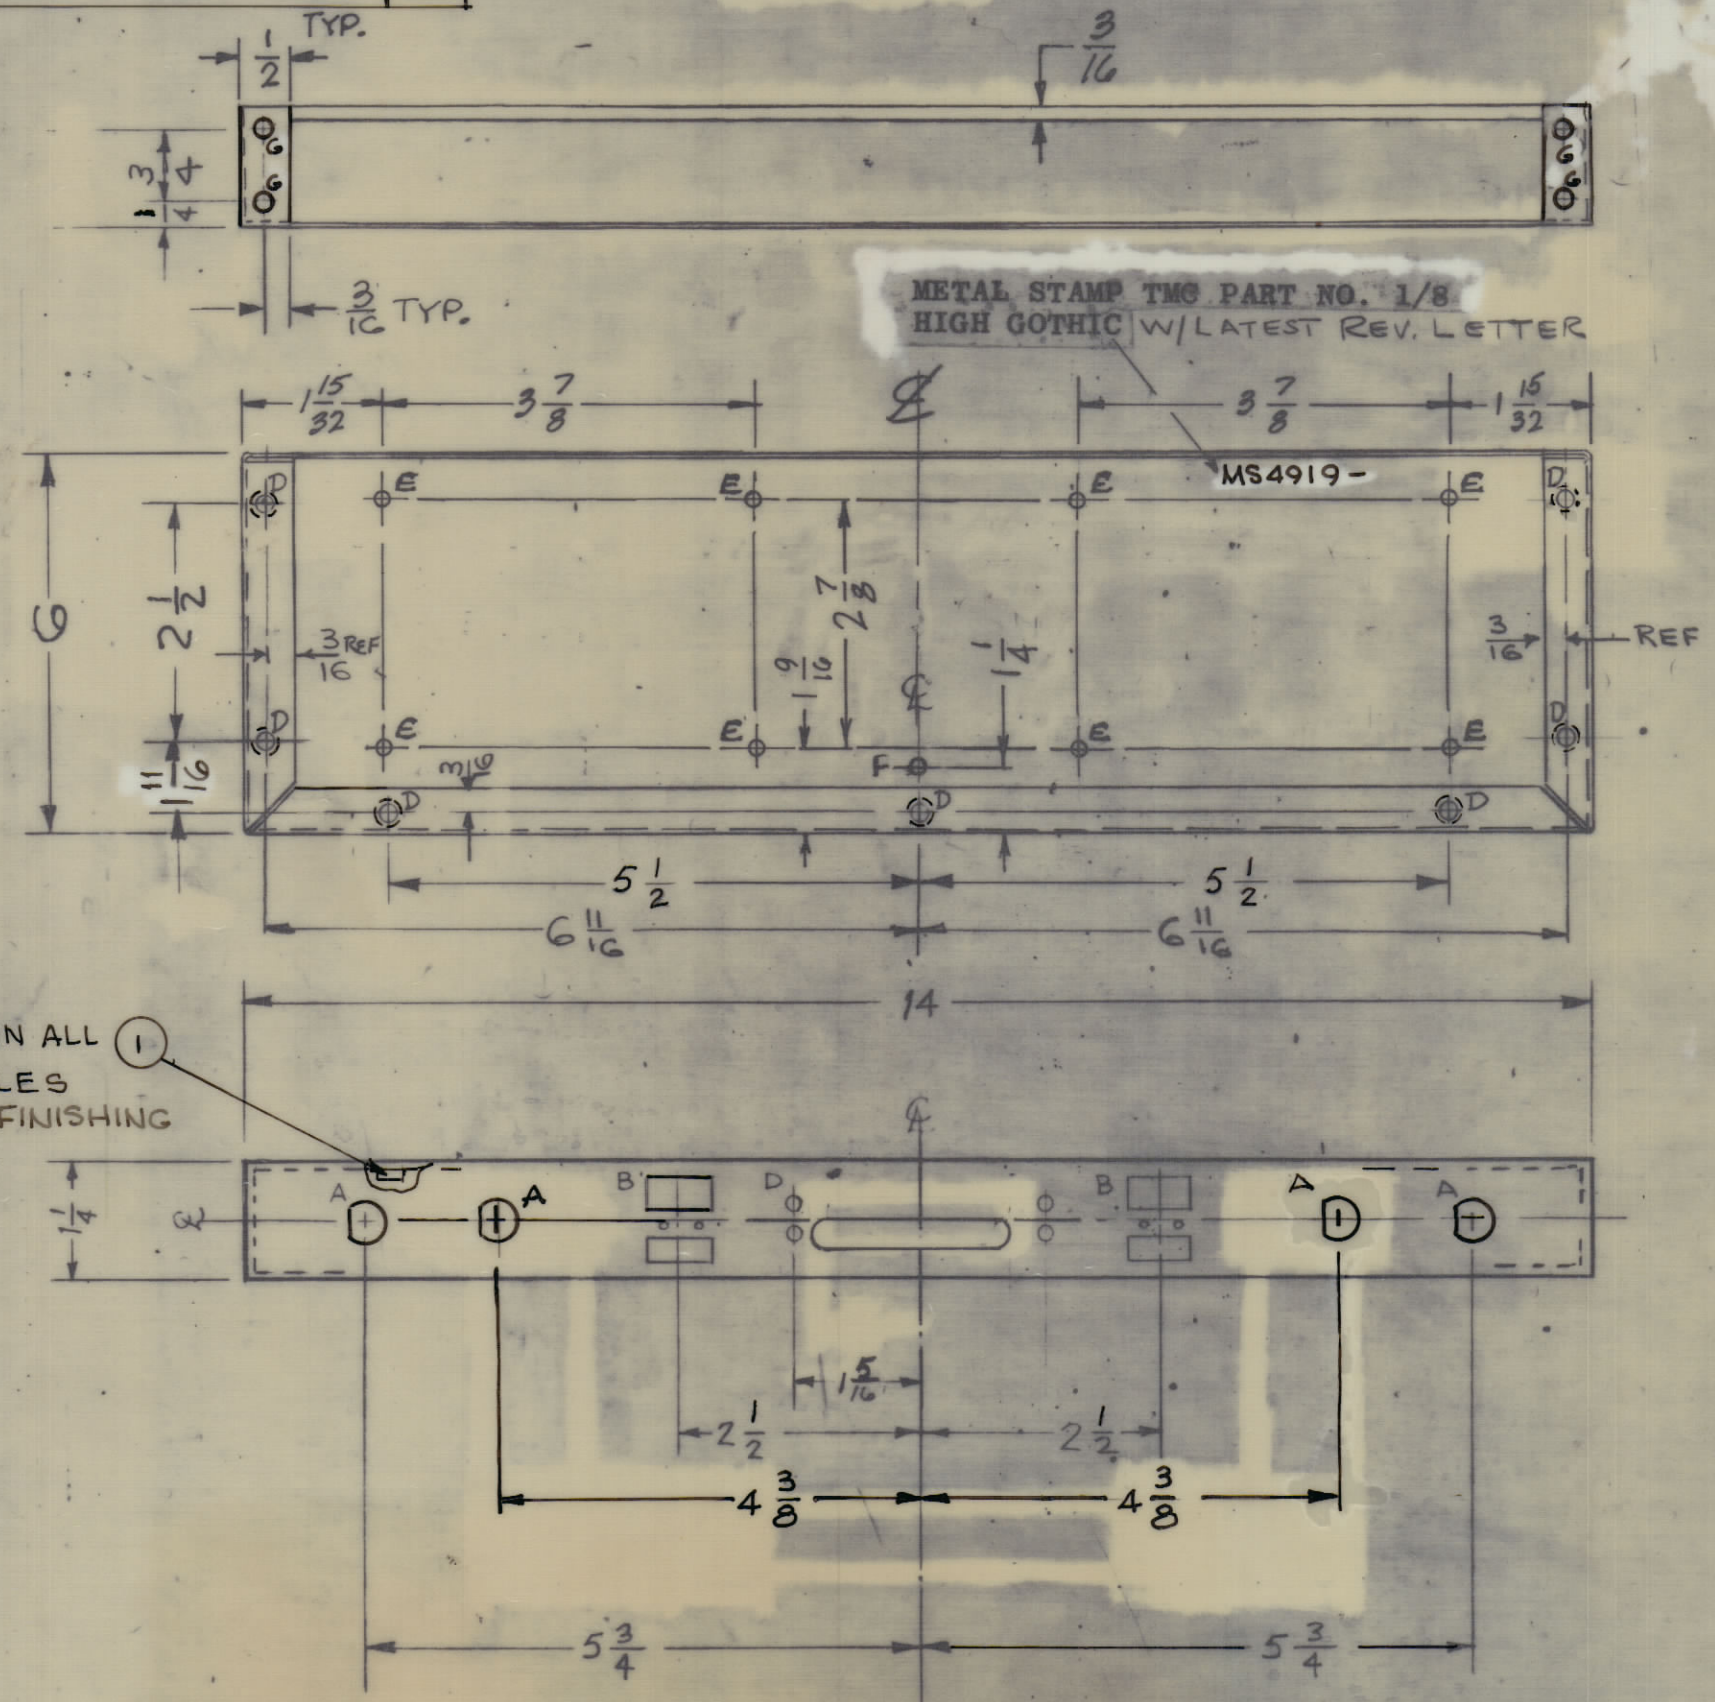

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON
FRACTIONS DECIMALS ANGLES
±1/64 ±.005 ±1/2°

MATERIAL
.050 ALUMINUM
5052-H32

FINISH
S404 YELLOW IRIDITE

MAXIMUM
ALLOWABLE TOLERANCES HAVE BEEN
DETERMINED AND ANY DEVIATIONS
WILL BE CAUSE FOR REJECTION.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES
 4. MOUNT INSERTS AFTER FINISHING

REF: LD 2078		7 1 NT129-632-3		NUT, PLN. SPLINE	
QTY REQ	ITEM	PART. NO.	DESCRIPTION		SYMBOL
			BILL OF MATERIAL		
FINAL APPROVAL			THE TECHNICAL MATERIEL CORP.		
MECH. DES.			MAMARONECK, NEW YORK		
ELECT. DES.			CHASSIS, MAIN		
CHECKED			MODEL RTO-1A		
DRAWN			CODE		
M. TANTILLO			82679		
APPROVED FOR BUSHIPS			SIZE		
CONTRACT NO.			C		
			DWG. NO.		
			MS4919		
SCALE			SHEET		
			OF		

ML 28
4/29/66