


REQ. PER UNIT	USED ON			MS4954	B
	MODEL	ASS'Y. NO.	DATE		
1	TLAA-2.5K	A5498	6-7-66		

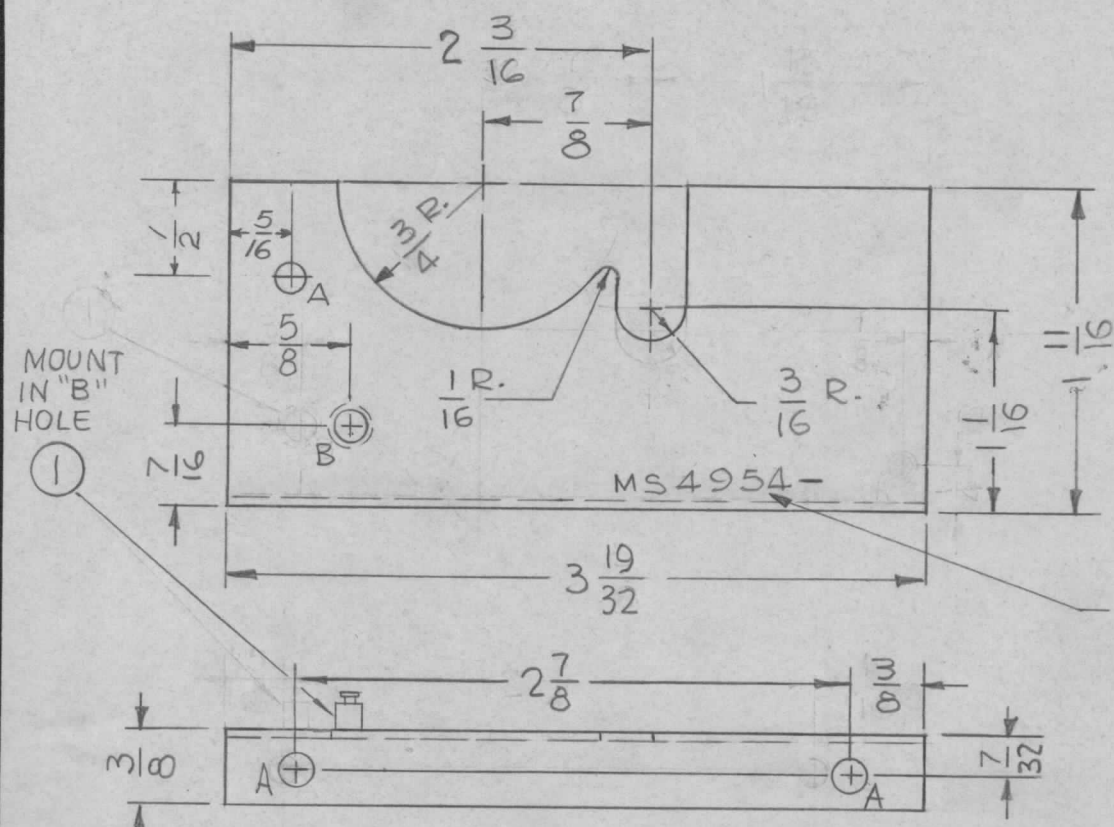

HOLE -
 A - 9/64 3 REQ.
 B - 158^{+0.002}_{-0.000} DIA. 1 REQ.
 C SINK .175

MARK TMC PART No. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

B	ADD "A" HOLE CHG. REQ 2-3	2-7-69	19249	GE	<i>Jde</i>	FB	<i>Jde</i>
A	FINISH WAS S245 SILVER PLATE S423 SILVER KOTE	4-24-68	18893	H.S.	<i>MW</i>	FB	<i>Jde</i>
Ø	ORIGINAL RELEASE FOR PRODUCTION	11/17/66	Ø	CV		<i>Jde.</i>	
X5	5/B WAS 3/B	11-16-66	X5				
X4	FINISH WAS S404 YEL. IRIDITE	8-5-66	X4				

REQ. ITEM	PART NO.	TERM. FEED THRU INS.	SYMBOL
1	TE169-3		B
.051 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
ALUMINUM		SHIELD, RF	
5052-H32		G.D.L.	<i>[Signature]</i>
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
S404 YEL IDIRITE		<i>[Signature]</i>	<i>[Signature]</i>
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS4954 B

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1
DECIMALS	FRACTIONS	CODE	A
.X ± .05	± 1/64		
.XX ± .01	ANGLES		
.XXX ± .005	± 0° 30'		