


REQ. PER UNIT	USED ON			MS4961	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TLAA-25K	A5497	8-8-66		

MARK TMC P/NO 1/8 HIGH
GOTHIC W/LATEST REV.
LETTER.

- HOLE -
A - 11/64 DIA. 4 REQ.

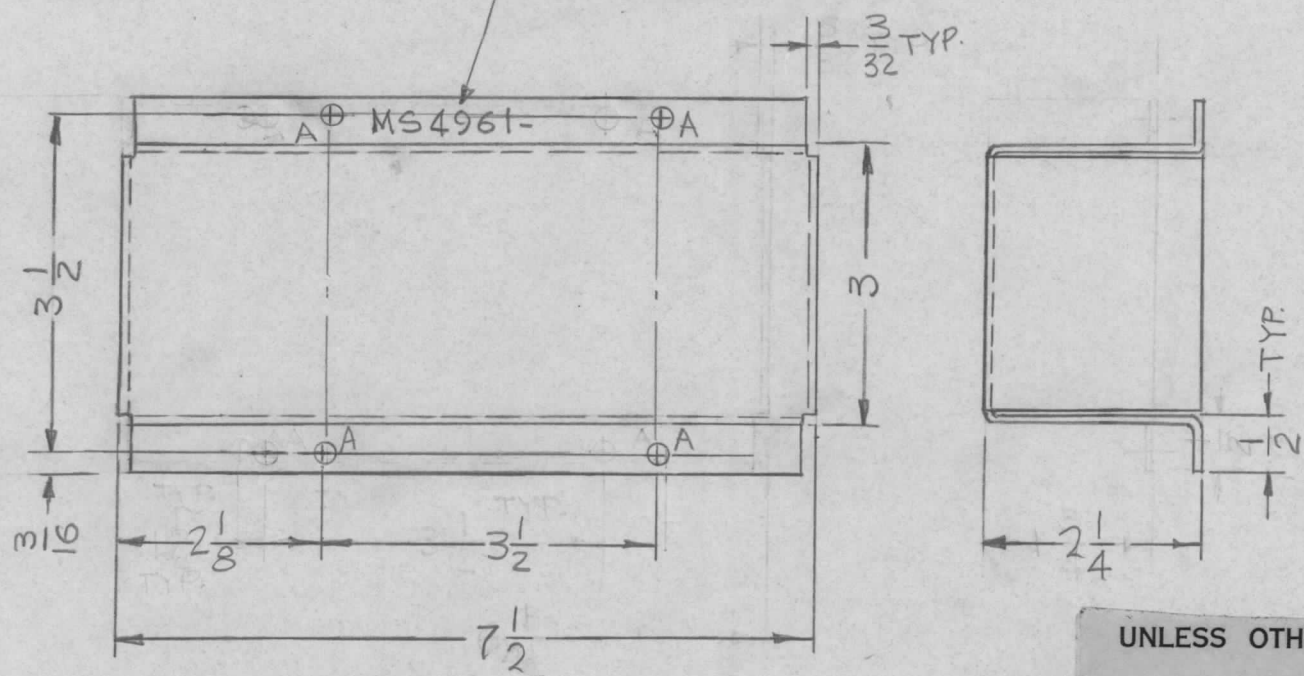

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	11/16/66	Ø	CV		
X3	2 1/8, 7 1/2, 2 1/4 WERE 2, 7 1/8, 1-3/4	10-11-66	X3	HLA	HLA	HLA
X2	DIM 7 1/2 WAS 6 3/4 DIM 2 WAS 1 1/4	8-13-66	X2	G.D.L	G.D.L	
X1	REVISED & REDRAWN	8-8-66	X1	G.D.L	G.D.L	
X	EXPERIMENTAL RELEASE	6-14-66	X	HLA	HLA	HLA

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1/2 : 1

DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A
--	------------	---	-----------

REQ. ITEM	PART NO.	BUDETTI	DESCRIPTION	SYMBOL
	• 064 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	STOCK SIZE		BOX, DECOUPLER	
	ALUMINUM			
	MATERIAL			
5052-H32		8-8-66 G.D.L	G.D.L	HLA
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
S404 YEL IRIDITE		HLA	G.D.L	HLA
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		
				MS4961 Ø