REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	6-2-66	X			
X1	4 7/64 DIM WAS 3 63/64	6-15-66	—	Jc		
X2	MAT'L WAS 2024-T3	11-7-66	—	Jc		
Q	ORIGINAL RELEASE FOR PRODUCTION	11.11.66	—	WHO		

MS4973

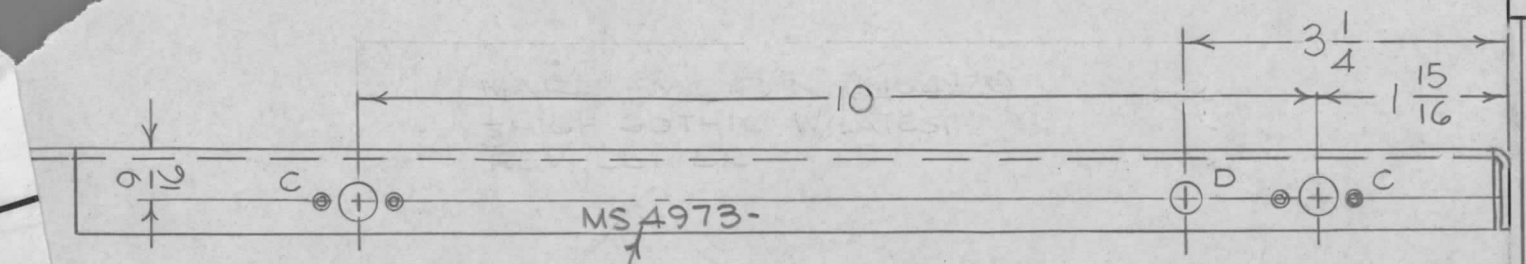

MARK TMC PT. NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

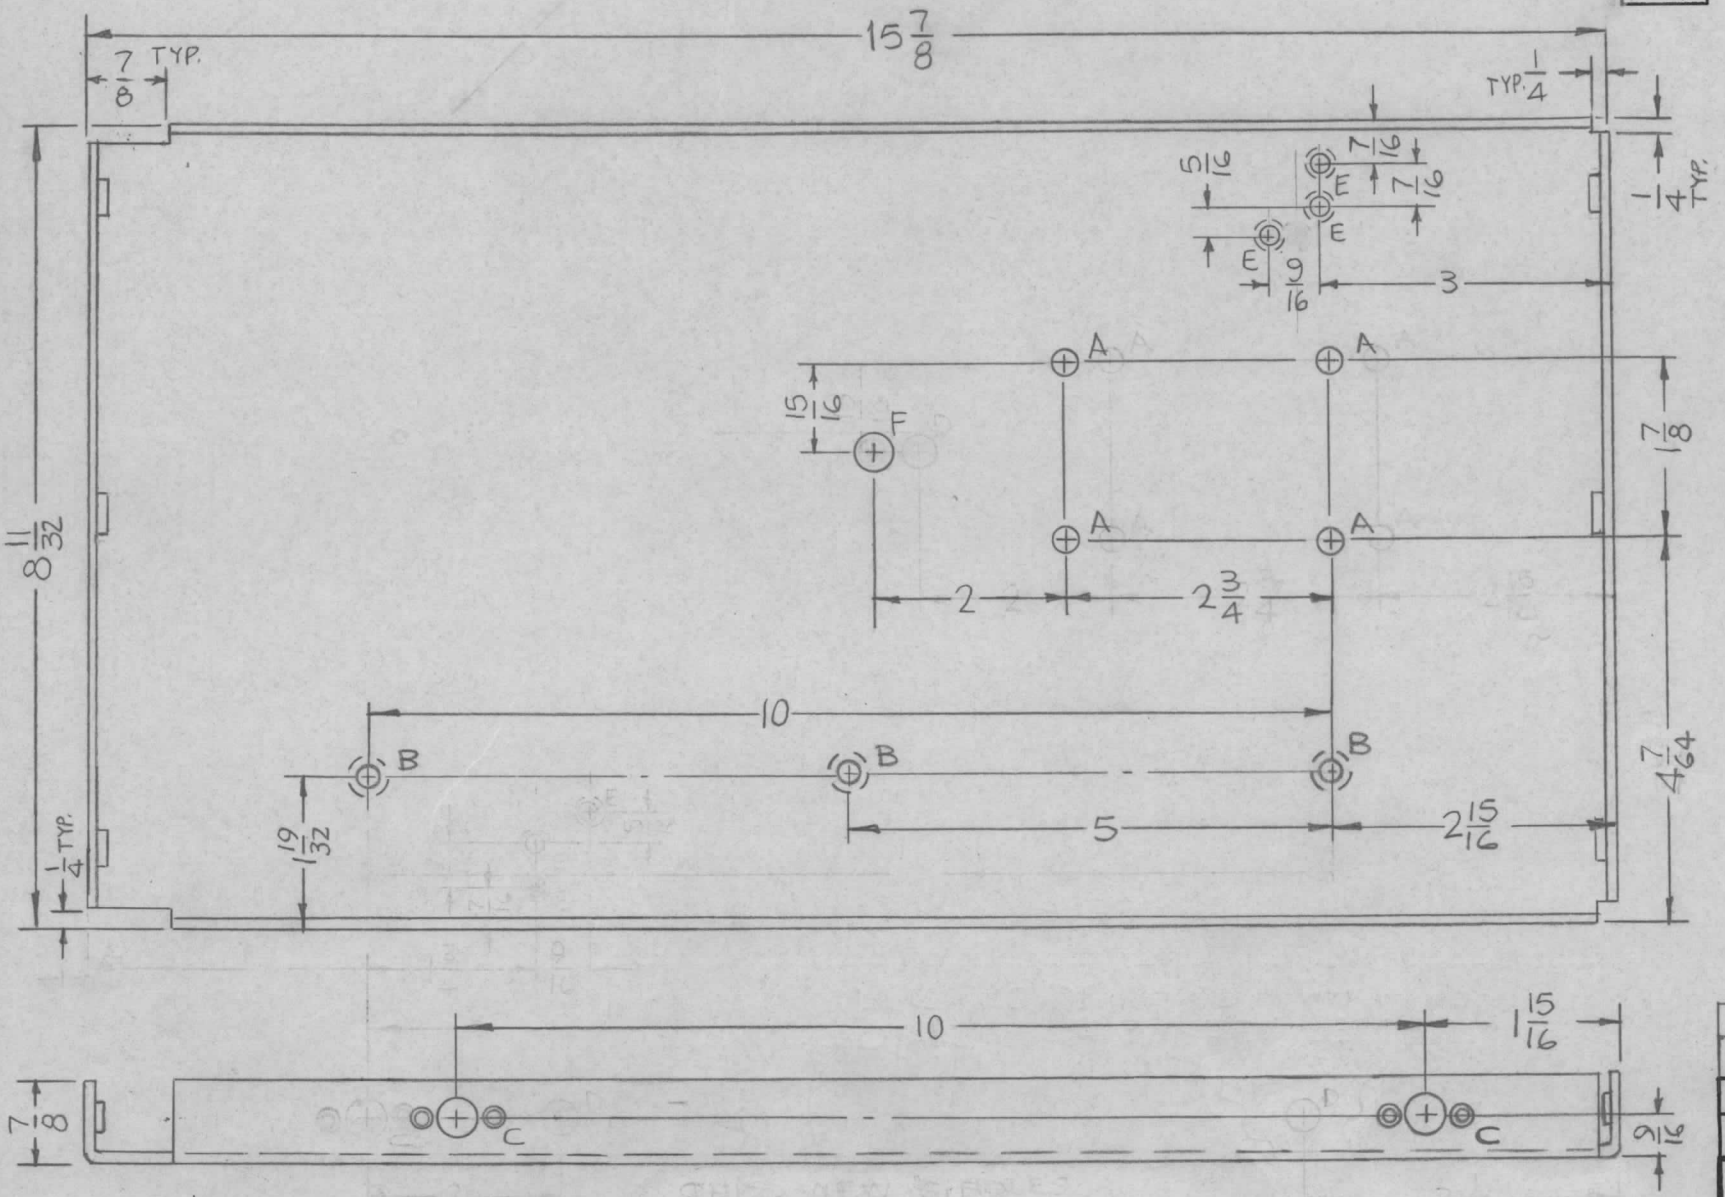

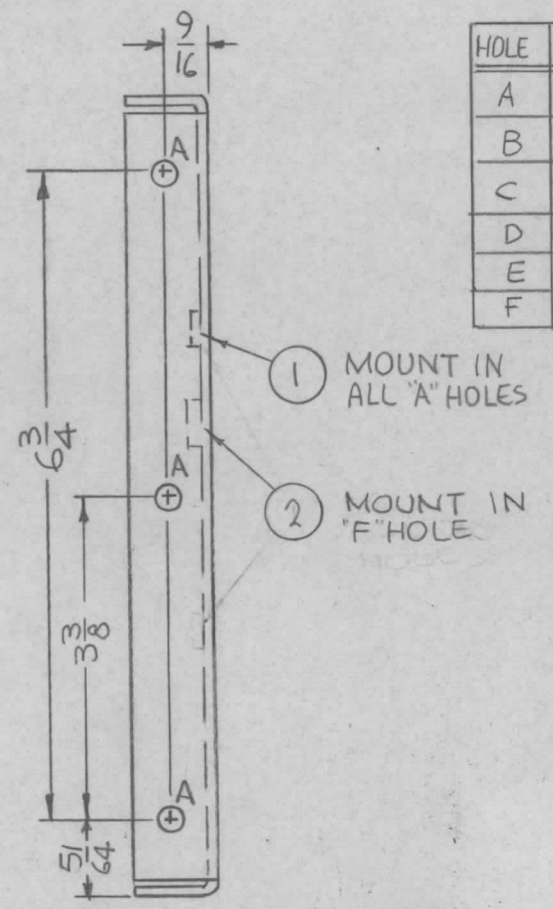

HOLE	DESCRIPTION	REQ.
A	.250-.253 DIA.	10
B	DR. 196 DIA. C'SINK 82° TO .390 DIA.	3
C	SEE DETAIL	4
D	5/16 DIA.	1
E	DR. 120 DIA. C'SINK 82° TO .230 DIA.	3
F	.413-.416 DIA.	1

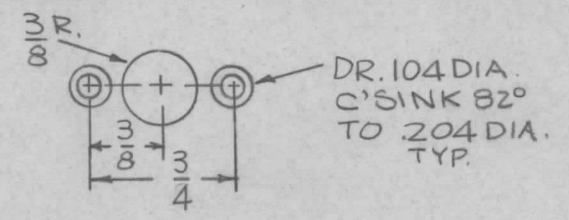

DETAIL-C

OPPOSITE SIDE SAME

REF: LD2098-

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
1	2	NT129-524-C	NUT, PLAIN, SPLINE	F
10	1	NT129-1032-6	NUT, PLAIN, SPLINE	A

F. BUDETTI — LIST OF MATERIAL

MATERIAL: 1/8 THICK ALUMINUM 5052-H32

FINISH: S404 YEL. IRIDITE

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: PLATE, SIDE, RIGHT

DRAWN	DATE 4-12-66	FINAL APPROVAL	DATE 11/10/66
CHECKED	DATE		
ELECT. DES.	DATE 11-9-66	MS4973	Q
MECH. DES.	DATE	SHEET	REV. LTR.
M/L	11/11/66		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS: .X ± .05; .XX ± .01; .XXX ± .005
FRACTIONS: ± 1/64
ANGLES: ± 0° 30'

1	AP-128	A5258
Q'T'Y./UNIT	MODEL USED ON	ASS'Y. NO.

SCALE 1/2:1 — CODE A

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

NOTES

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING