
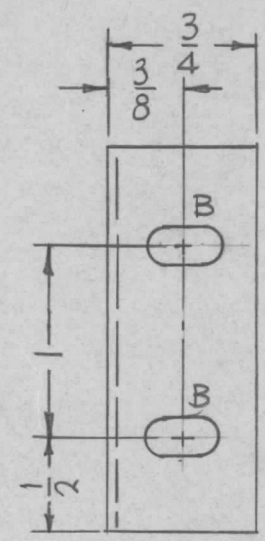


REQ. PER UNIT	USED ON			MS4978	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TSTK-2.5K		6-9-66		

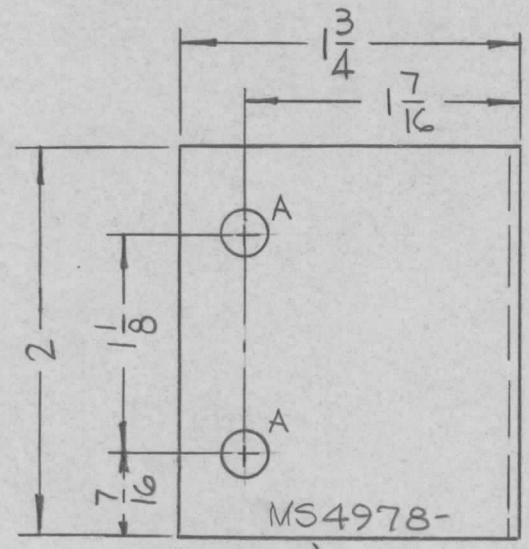

HOLES	DESCRIPTION	REQ
A	15/64 DIA.	2
B	3/16 X 3/8 SLOT	2

MARK TMC P/N
 1/8 HIGH GOTHIC
 W/LATEST REV
 LETTER.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	12.13.66	44	WFW			.064 THICK STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	BRACKET, MTG INTERLOCK SWITCH	
X	EXP. RELEASE	6-9-66	X				ALUMINUM				
							MATERIAL				
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1				5052-H32				
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A		S404 YEL. IRIDITE		DRAWN	CHECKED	FINAL APPROVAL
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS4978 Ø	