


UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON			MS4980
	MODEL	ASS'Y. NO.	DATE	
1	TLAA-25K	AS128	8-9-66	

HOLE	DESCRIPTION	REQ
A	9/32 DIA	1
B	11/64 DIA	2

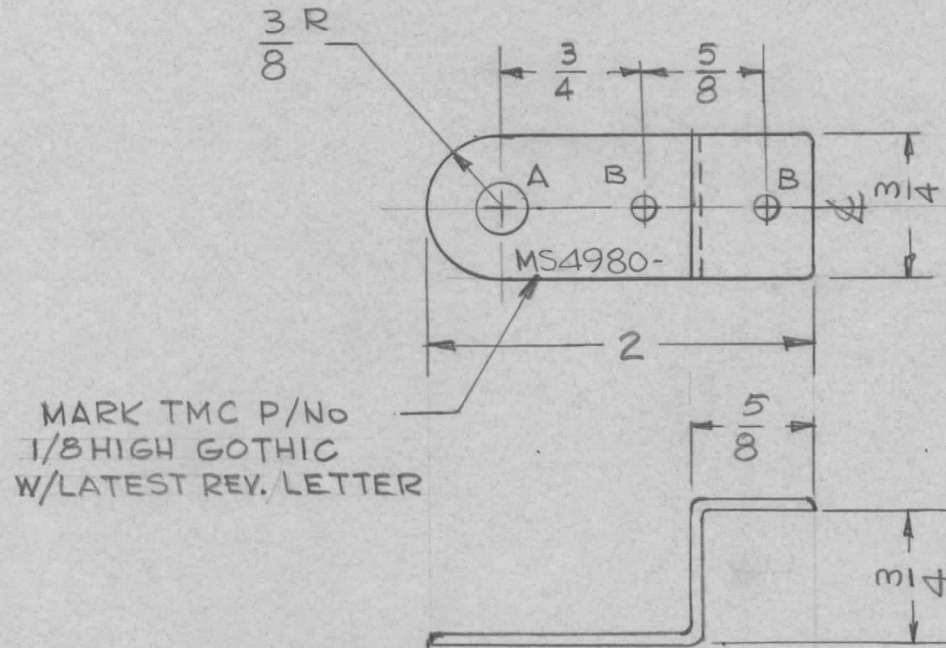

- NOTE -
ROUND ALL EDGES
1/64 R APPROX

REQ.	ITEM	PART NO.	BUDETTI DESCRIPTION				SYMBOL	
Q	ORIGINAL RELEASE	11.11.66	lftb	file	.064 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
XI	REVISED & REDRAWN	8-9-66	XI	G.D.L.	STOCK SIZE			
X	EXPER. RELEASE	6-16-66	Jc	JB	COPPER			
SYMBOL		DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE	1:1				HALF HARD
DECIMALS		FRACTIONS	CODE	TYPE & TEMPER				HEAT TREAT. SPEC.
.X ± .05		± 1/64	A	S245 SILVER PLATE				8-9-66
.XX ± .01		ANGLES		S423 SILVER KOTE				G.D.L.
.XXX ± .005		± 0° 30'		FINISH & SPEC. NO.				DRAWN
								CHECKED
								FINAL APPROVAL
								ELEC. DES. APP.
								MECH. DES. APP.
								MS4980